POLTRACK FULL PU SYSTEM - 14mm

Running track spike-proof system

Synthetic outdoor system in total thickness of 14mm.
It is applied on fine asphalt or smooth, waterproof concrete, without rising humidity issues. After laying a PU primer for adhesion, a PU pore filler is applied as a sealing layer, then follows the first layer (base layer), which consists of laying the FULL-PU colored polyurethane material **POLAPLAST P20** and broadcasting **RECYCLED RUBBER** 1-4mm on top (fresh-on-fresh), a second layer comprising again the **FULL-PU** colored polyurethane material **POLAPLAST P20** laid on the surface and **RECYCLED RUBBER** 1-4mm broadcast on top (fresh-on-fresh) and the third layer (surface layer) is the full-PU colored polyurethane material **POLAPLAST P20** laid on the surface and **EPDM** granules 1-3mm broadcast on top to finish it off (fresh-on-fresh).

Application method: Sealing layer is applied by flat metal trowel, FULL-PU colored polyurethane material **POLAPLAST P20** is applied by notched trowel.

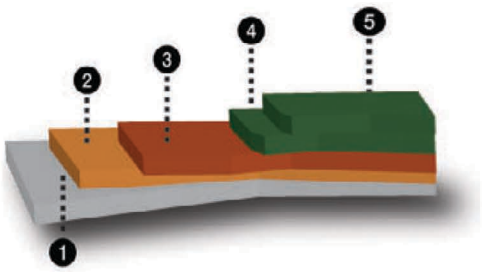

Steps:

1.POLAPLAST P10 - Polyurethane primer.
2.POLAPLAST P22 - Sealing layer.
3.Mixture of POLAPLAST P20, colored full-PU material plus SBR granules.
4.Mixture of POLAPLAST P20, colored full-PU material plus SBR granules.
5.Mixture of POLAPLAST P20, colored full-PU material plus EPDM granules.

Description	Consumption
POLAPLAST P10 - Polyurethane primer.	0.2kg/m^2
SEALING LAYER	
POLAPLAST P22 - Sealing layer.	1.5kg/m^2
BASE LAYER	
POLAPLAST P20 - Colored polyurethane full-PU material.	3.0kg/m^2
RECYCLED RUBBER in granulometry of 1-4mm.	2.65kg/m^2
SECOND LAYER	
POLAPLAST P20 - Colored polyurethane full-PU material.	2.8kg/m^2
RECYCLED RUBBER in granulometry of 1-4mm.	2.1kg/m^2
SURFACE LAYER	
POLAPLAST P20 - Colored polyurethane full-PU material.	2.75kg/m^2
EPDM in granulometry of 1-3mm.	3.6kg/m^2