

PLAYGROUND FLOORINGS

QUICKLAWN SAFEPOL SYSTEM

Elastic, safety flooring ideal for children playground floorings, applied at site in various thickness from 30mm up to 120mm.


Consists of a prefabricated special safety pad for playground flooring **RAPIDFOAM 868**, followed by a layer of **PU PRIMER 870** with a polyester net and on top a mixture in 15mm thickness of **EPDM 856** (in granulometry of 1-3mm) with **PU BINDER 1118** (upper layer).

It can create many designs and patterns in a variety of **EPDM** colors. It is applied in thickness of 30mm up to 120mm, even on compacted, clean, dry gravel and on cement or asphalt surfaces.



Steps:

- 1. RAPIDFOAM 868 - Prefabricated special safety pad for playground floorings.**
- 2. PU PRIMER 870 - Special, polyurethane primer with the parallel use of a polyester net.**
- 3. SAFEPOL MULTICOLOR - Mixture of PU BINDER 1118 and EPDM 856 in granulometry of 1-3mm.**
Applied by flat metal trowel after spreading and leveling with rake and straightedge. Rolling with cylinder follows for compacting.

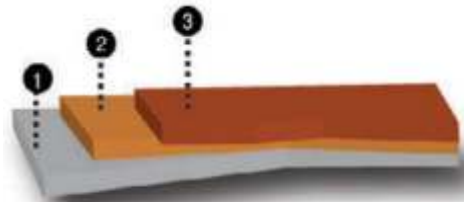

Description	Consumption
RAPIDFOAM 868 - Prefabricated, special safety pad for playground floorings.	
PU PRIMER 870 - Special, polyurethane primer.	0.20-0.25kg/m ²
POLYESTER NET	
SAFEPOL MULTICOLOR - Mixture of PU BINDER 1118 (3kg/m ²) and EPDM 856 (15kg/m ² /cm) in granulometry of 1-3mm.	18kg/m ² /cm