

RUNNING TRACKS

POLTRACK SPRAYCOAT

Synthetic outdoor system for running tracks.


It is applied on fine asphalt or smooth, waterproof concrete, without rising humidity issues, in two basic layers. The first base layer is mixed at site, and consists of **RECYCLED RUBBER 858** and the polyurethane binder **POLAPLAST P13**. The second layer, spray layer, is applied at site and consists of **EPDM 856** (0.5-1.5mm) and the colored polyurethane spray coating **POLAPLAST P12**.

Priming with **POLAPLAST P10** precedes the application.

Certified system by IAAF.

Steps:

- 1. POLAPLAST P10 - Polyurethane primer.**
Applied by airless sprayer or brush.
- 2. Mixture of POLAPLAST P13 and RECYCLED RUBBER 858.**
Applied by paving machine.
- 3. Mixture of POLAPLAST P12 and EPDM 856.**
Applied by spraying machine in two crossing layers.

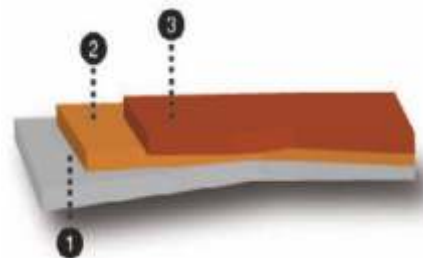

Description	Consumption
POLAPLAST P10 - Polyurethane primer.	0.15-0.2kg/m ²
BASE LAYER	
POLAPLAST P13 - One-component, polyurethane binder.	1.32kg/m ²
RECYCLED RUBBER 858 in granulometry of 0.5-2.5mm.	6kg/m ²
SPRAY LAYER	
POLAPLAST P12 - Colored, two-component polyurethane spray coating.	1.35kg/m ²
EPDM 856 in granulometry of 0.5-1.5mm.	0.9kg/m ²