

OUTDOOR SPORTS FLOORING

SPORTFLOOR-EX HARD COURT

Outdoor resilient, acrylic medium-hard sports flooring system ideal for tennis, basketball, volleyball, handball, football courts, as well as any other outdoor sports court.

Combination of wet-pour acrylic coatings in total average thickness of 2.2mm.

Classified system by the International Tennis Federation (I.T.F) - Class 4.



Steps:

1. RITIVEX R LIQUID 1102 - Acrylic primer.



Used as primer of acrylic coatings, such as **ELASTOSPORT 853**, **SUPER ELASTOCOAT 842**, **ELASTOTURF 851** or **ELASTOMARK 818**. Applied by airless sprayer, brush, squeegee or roller.

2. ELASTOSPORT 853 - Acrylic, one component, smoothing and repairing wet-pour resurfacer for sports flooring systems.

Consists of acrylic resins, quartz sand and special improver. It is applied by squeegee on smooth compact asphalt to seal the porosity and smooth out the surface before the application of **ELASTOTURF 851**. Highly resistant to adverse weather conditions(snow, frost, heat waves etc.) after drying.

3. ELASTOTURF 851 - Acrylic, elastic, slip-resistant, coating for sports flooring systems.

Consists of acrylic resins, quartz sand and special improver. It is combined with **ELASTOSPORT 853** as substrate to create multi-purpose sports flooring systems. Highly resistant to adverse weather conditions(snow, frost, heat waves etc.) after drying. Applied by squeegee.

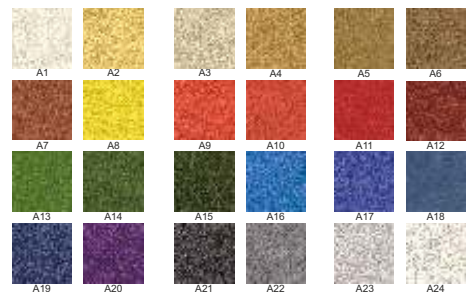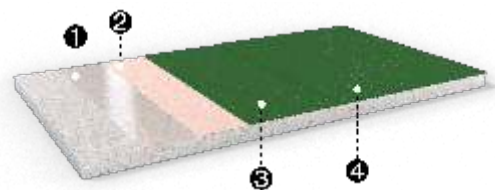

Description	Consumption
RITIVEX R LIQUID 1102 - Acrylic primer.	0.2-0.3kg/m ² for 1 layer
ELASTOSPORT 853 - Acrylic, one component, smoothing and repairing wet-pour resurfacer for sports flooring systems.	2kg/m ² for 2 layers
ELASTOTURF 851 - Acrylic, elastic, slip-resistant, coating for sports flooring systems.	1kg/m ² for 2 layer 1.5kg/m ² for 3 layers