

KDF

Sports Flooring Systems & Building Materials

WET-POUR POLYFLEX AEL-IN INDOOR SPORT SYSTEM



www.kdf.gr

KDF LTD (www.kdf.gr) is one of the most dynamic and export-oriented Greek companies (currently activated in more than 55 countries in 4 continents), based in Greece (EU) and U.A.E too, with production facilities and warehouses in both countries for acrylic and polyurethane materials.

We are experts in sports, industrial and decorative flooring products and systems, with huge experience in Europe, Africa, Asia, Middle East and India as well.

Our export horizon is expanding rapidly and our goal is to stand out as a model of flexibility and competitiveness. The company, being one of the pioneer companies in the sector of sports flooring systems and building materials and giving particular attention to providing a fully upgraded range of products and services, provides certified systems by **ITF, IAAF, EU norms, LNE, LABOSPORT, ISASPORT, to name but a few.**

Our systems are approved in many ministries like:

- Ministry of Education in U.A.E
- Ministry of Education in K.S.A
- Ministry of Education in Oman
- Ministry of Education in Kuwait and many other institutes like
- Oman Royal Police
- Aramco, K.S.A
- Musanada in U.A.E
- Municipality of Doha
- Municipality of Dubai, Abu Dhabi, Sharjah and many others institutions.

KDF goes far beyond trade, providing consultancy in marketing and also technical support all the way, from the costing till the finalization of the project. Operating under the requirements of ISO 9001/2015 for production, trade and also application, we make sure our products are first applied successfully at site by our own people before we launch them abroad.

Therefore, our systems have all stood the real life test in different climates, from Middle East till Russia, and this is one of our main assets, enabling us to provide full and vertical technical support from specifying to final application plus supervision when required or even full application and costing.

We invite you to discover a world of sports flooring expertise and solutions.

VIEW OUR NEW SPORTS CATALOGUE



KDF - Kataskeves Dapedon LTD
e : exports@kdf.gr
w : www.kdf.gr

1 Papanikolaou Ave, Pefka
57010, Thessaloniki, Greece
t / f : 0030 2310 829598

INDICATIVE REFERENCE LIST OF PROJECTS

-12 SCHOOLS IN U.A.E, MINISTRY OF EDUCATION(THROUGH VARIOUS CONTRACTORS) - 40000m² EPDM Rubber flooring

-UNIVERSITY OF DAMMAM - KSA - 13000m² - Acrylic cushion floorings

-KING ABDULLAH BASE AIR DEFENSE - TAIF, KSA - 12600 m² - Running track

-KING FAHD UNIVERSITY OF PETROLEUM AND MINERALS-DHARAN, KSA-12400m²-Rubber outdoor flooring

-RUNNING TRACK - K.S.A- 11000 m² - Running track, POLTRACK SANDWICH system

-GEMS SCHOOL - DUBAI, U.A.E - 10000 m² - Running track

-PASARGRAD WHOLESALE MARKET-IRAN - 10000 m² - Decorative flooring

-YAS ISLAND, ABU DHABI, U.A.E - 10000m² Bicycle track

-ABHA STADIUM - K.S.A - 9000m² - POLTRACK SANDWICH system

-ABU DHABI STADIUM - U.A.E - 9000m² - Artificial Grass, POLITURF LEADER 55140

-ALEXANDRIA STADIUM - ALEXANDRIA, EGYPT - 8500 m² - Running track

-MINISTRY OF EDUCATION IN KUWAIT - KUWAIT - 8000m² - Polyurethane flooring, Polyflex Pu-In system

-SALAM STREET & MINA ROAD, ABU DHABI, U.A.E - 8000m² Bicycle track, Sportground-Ex system

-KING FAHAD NAVAL BASE - JUBAIL, KSA - 8000m² - Running track

-MUNICIPALITY OF VELVENTO - KOZANI, GREECE - 8000m², Running track

-ABBHA, KSA - 7600m² - Running track

-MUNICIPALITY OF ZENICA - ZENICA, BOSNIA& HERZEGOVINA - 7500m², Poltrack Spraycoat, Running track

-ADNOC SCHOOLS - U.A.E - 7000m² - Safepol system

-ATLAS CENTER-BAM, IRAN - 7000 m² - Decorative flooring

-RUNNING TRACK - SUDAN - 7000 m² - Running track, POLTRACK SPRAYCOAT system

-CORNISH, JEDDAH, K.S.A - 6000m² Bicycle track Sportground-Ex system

-YOKOGAWA ELECTRIC CORPORATION-DHAHRAN TECHNO VALLEY-DAMMAM, KSA - 5500m²- Epoxy antistatic floorings

-AMITY INTERNATIONAL SCHOOL - ABHU DHABI, U.A.E - 5500m², Poltrack Spraycoat, Running Track

-SHUQAIQ WATER AND ELECTRICITY COMPANY - JIZAN, KSA - 5400 m² - acrylic courts

-TALEEM UPTOWN SCHOOLS - DUBAI, UAE - 5400m²-Acrylic sports courts systems

-SAUDI AIR FORCE - KSA - 5250 m² - Acrylic coating elastoturf, running track

-RUNNING TRACK - K.S.A - 5000 m² - Running track, POLTRACK SANDWICH system

-AL HAMRA, RAS AL KHAIMAH, U.A.E - 5000m² Bicycle track, Sportground-Ex system

-AIRBASE IN TAIF - KSA - 5000 m² - Running track

-DEPARTMENT OF EDUCATION ASIR REGION - KHAMIS, KSA - 4500 m² - Running track

-SERVIA STADIUM - KOZANI, GREECE - 4500m², Running track

-COMMUNITY COLLEGE - KHAMIS, KSA - 4200 m² - Running track

-MULTIPLE RUNNING TRACKS - ALGERIA - 40000 m² - Running track, POLTRACK SPRAYCOAT system

-SPORTS CLUB CENTER GLIFADA - ATHENS, GREECE - 4000m²- Poltrack Spraycoat, Running Track

-EMIRATES INTERNATIONAL SCHOOL - DUBAI, U.A.E - 4000m² - Safepol System, Playground flooring

-HH KHALID BIN BANDAR - RIYADH, KSA - 3800 m² - Volleyball/basketball rubber courts

-RUNNING TRACK- UKRAINE - 3600m² - RunningTrack, Poltrack Spraycoat system

-ANATOLIA GOLLEGE - THESSALONIKI, GREECE - 3600m², Running track

-AIMARJAN ASLAND – PARTIAL - 3600m²- Poltrack Sandwich, Running Track

-RUNNING TRACK - ISRAEL - 3500 m² - Running track, POLTRACK SANDWICH system

-MATRIX SPORTING CLUB - EGYPT - 3400 m² - Polyurethane outdoor flooring, Polyflex PU-EX System
-SPORTS CLUB CENTER KISSAMOS - CRETE, GREECE - 3200m²- Poltrack Sandwich, Running Track
-AL LUSAIL SPORTS CLUB - DOHA, QATAR - 3200m² - Jogging track
-SPORTS CLUB CENTER - SERBIA, GREECE - 3200m² - Poltrack Sandwich, Running Track
-STADIUM CENTER - UKRAINE - 3200m² - RunningTrack, Poltrack Spraycoat system
-KING KHALID UNIVERSITY - ABHA, KSA - 3100 m² - Running track
-AL FAIOUM UNIVERSITY - FAIOUM, EGYPT - 3000m²- Polyurethane indoor flooring, Polyflex PU-IN system
-SPORTS CLUB CENTER "PAPAGO" - ATHENS, GREECE - 3000m²- Poltrack Sandwich, Running Track
-PANORAMA SPORTS COMPLEX - THESSALONIKI, GREECE - 3000m², Running track
-INDIAN ARMY - SAGAR, INDIA - 2800m²- Acrylic sports courts
-ALL SAINTS SCHOOL - MUMBAI, INDIA - 2700 m² - PU outdoor sports flooring and running track
-INDIAN INSTITUTE OF SCIENCE EDUCATION AND RESEARCH-BHOPAL, INDIA-2700m² -Acrylic sports courts
-OUR OWN GOLF SCHOOL - 2700m²- Poltrack Spraycoat, RunningTrack
-AL RAYAN, QATAR - 2500 m² - Running track, POLTRACK SANDWICH system
-OUTDOOR SPORTS VENUE - VARNA, BULGARIA - 2500 m² - Acrylic, ITF classified, 8 layers system
-ALHOSN SPORTS COMPLEX - 2400 m² - Running track, POLTRACK SANDWICH system
-TEACHERS COLLEGE - ABHA, KSA - 2050 m² - Running track
-MUSAB BIN OMAIR BOYS SCHOOL - BIN OMRAN, QATAR - 2050 m² - PU outdoor sport flooring
-BURAIRAT SCHOOL - RAK, UAE - 2000 m² - Running track
-HADAYEK ALAHRAM CLUB - GIZA, EGYPT - 2000m², PU outdoor sports flooring, POLYFLEX PU-EX WET-POUR system
-AL SAILIYA BOYS SCHOOL - AL SAILIYA, QATAR - 2000 m² - Polyurethane, outdoor sport flooring
-KING KHALID UNIVERSITY - ABHA, KSA - 2000 m² - Volleyball/basketball rubber courts
-HH KHALID BIN BANDAR - RIYADH, KSA - 2000 m² - Volleyball/basketball rubber courts
-RAWDA RASHEED PRIMARY SCHOOL FOR BOYS - 2000 m²
-DAMIETTA GOVERNMENT - EGYPT - 2000m² - Running track, Poltrack Spraycoat Sealed System
-AL WAKAIR BOYS SCHOOL - AL WAKRAH, QATAR - 1950 m² - Polyurethane, outdoor sport flooring
-THE LAKE DISTRICT - PUNE, INDIA - 1950m²- Acrylic sports courts
-PRESIDENTIAL GUARD COMMAND MAHAWI - ABU DHABI, UAE - 1900m² - Football court
-UNITED (SABIC) SPORTS CLUB - 1900 m² - Rubber flooring
-SHOOLS MINISTRY OF EDUCATION - KHAMIS, KSA - 1800 m² - Rubber floorin
-AL MAJAD AMPHITHEATER - SHARJA, UAE - 1800m² - Certified Jogging track
-QASSIM UNIVERSITY - KSA - 1800 m² - Polyurethane sports flooring
-AL QADSIYA MODEL INDEPENDENT SCHOOL - ALWAAB, QATAR - 1770 m² - PU outdoor sport flooring
-AL WAHDA SPORT ACADEMY CLUB - ABU DHABI, UAE - 1700 m² - Acrylic sports system
-ALSARH SCHOOLS OF CIVIL - RIYADH, KSA - 1650m² - PU glue/Soccer field
-GD GOENKA PUBLIC SCHOLL - PURNIA, INDIA - 1630m²- Acrylic sports courts
-SPA RESORT DERENIVSKUPIA KI - UZHGOROD, UKRAINE - 1600 m² - Flexfloor-ex system, volleyball court
-THE MILITARY HOSPITAL - RIYADH, KSA - 1560 m² - Volleyball/basketball rubber courts
-THE MILITARY HOSPITAL - RIYADH, KSA - 1560 m² - Pu glue-PU sports flooring
-AL FORSHAN SPORTS CENTRE - ABU DHABI, U.A.E - 1500m² - Smartfloor system, Acrylic flooring
-INDUSTRIAL FLOORING - BULGARIA - 1500m² - Epoxy flooring, Polepox Coat 814 system
-SCHOOL IN AL WAKRA CITY - DOHA, QATAR - 1500 m² - Playground flooring

-IRAQ ARMY CAMP - IRAQ - 1500m² - Acrylic flooring in 2,2mm
-SCHOOL IN AL WAKRA CITY - DOHA, QATAR - 1500 m² - Playground flooring
-PROJECT GREEN LAND - DUBAI, UAE - 1500 m² - Jogging track
-UP TOWN SCHOOL - 1500m²- Poltrack Spraycoat, RunningTrack
-INDIAN AIR FORCE - ALLAHABAD, INDIA - 1450m² - Acrylic sports courts
-DUBAI MODERN HIGH SCHOOL - DUBAI, UAE - 1375 m² - Acrylic sports courts
-PROJECT ECOGREEN - DUBAI, UAE - 1350 m² - Jogging track
-POLICE COMPLEX BARRACKS NIZWA - OMAN- 1300 m² - Colorflex, PU sport flooring
-POLICE COMPLEX BARRACKS AL AJAIZ - OMAN - 1300 m² - Colorflex, PU sport flooring
-POLICE COMPLEX BARRACKS KATMATMILAH SITE - OMAN- 1300 m² - Colorflex, PU sport flooring
-POLICE COMPLEX BARRACKS SUWAIQ - OMAN - 1300 m² - Colorflex, PU sport flooring
-POLICE COMPLEX BARRACKS AL KAMIL - OMAN - 1300 m² - Colorflex, PU sport flooring
-PLAYGROUND FLOORING - BAHRAIN - 1300m² - Safepol system
-POLICE COMPLEX BARRACKS SHINAS - OMAN - 1300 m² - Colorflex, PU sport flooring
-POLICE COMPLEX BARRACKS BHALA - OMAN - 1300 m² - Colorflex, PU sport flooring
-POLICE COMPLEX BARRACKS MUDHAIBI - OMAN - 1300 m² - Colorflex, PU sport flooring
-POLICE COMPLEX BARRACKS THUMRAIT - OMAN - 1300 m² - Colorflex, PU sport flooring
-POLICE COMPLEX BARRACKS AL KHOUDH - OMAN - 1300 m² - Colorflex, PU sport flooring
-POLICE COMPLEX BARRACKS MAHDAH - OMAN - 1300 m² - Colorflex, PU sport flooring
-POLICE COMPLEX BARRACKS BID BID - OMAN - 1300 m² - Colorflex, PU sport flooring
-POLICE COMPLEX BARRACKS AL KHABOORA - OMAN - 1300 m² - Colorflex, PU sport flooring
-POLICE COMPLEX BARRACKS DHANK - OMAN - 1300 m² - Colorflex, PU sport flooring
-POLICE COMPLEX BARRACKS HAFEET - OMAN - 1300 m² - Colorflex, PU sport flooring
-POLICE COMPLEX BARRACKS AUQAD - OMAN - 1300 m² - Colorflex, PU sport flooring
-POLICE COMPLEX BARRACKS SUMAIL - OMAN - 1300 m² - Colorflex, PU sport floor
-OUTDOOR SPORTS VENUE - KOSOVO - 1300 m² - POLTRACK SPRAYCOAT System
-ALHALAFI BREAK - RIYADH, KSA - 1276 m² - Rubber flooring
-GI-DHOFAR BEACH RESORT & SPA - OMAN - 1225 m² - Colorflex, PU sport flooring
-RLS BASIC EDUCATION SCHOOL SOHAR - OMAN - 1225 m² - Colorflex, PU sport flooring
-MIXED BASIC EDUCATION SCHOOL AL QABIL - OMAN - 1225 m² - Colorflex, PU sport flooring
-BOYS BASIC EDUCATION SCHOOL BARKHA - OMAN - 1225 m² - Colorflex, PU sport flooring
-GIRLS BASIC EDUCATION SCHOOL MUDHAIBI - OMAN - 1225 m² - Colorflex, PU sport flooring
-MIXED BASIC EDUCATION SCHOOL AL AMERAT - OMAN - 1225 m² - Colorflex, PU sport flooring
-UMSALAMA GIRLS SCHOOL - AL RAYYAN, QATAR - 1200 m² - Polyurethane, outdoor sport flooring
-SHERATON PARK - DOHA, QATAR - 1200 m² - Playground flooring
-RAWDA BIN JASSIM SCHOOL - AL AZIZIYAH, QATAR - 1200 m² - Polyurethane, outdoor sport flooring
-GEMS WESTMINISTER SCHOOL - DUBAI, U.A.E - 1200 m² - Acrylic sports courts
-SILVER SPORTS CLUB - INDIA - 1200m²- Acrylic sports courts
-OUR OWN SCHOOL - SHARJA, U.A.E - 1200m² - Acrylic sports courts
-SHARJAH FOOTBALL CLUB - SHARJAH, UAE - 1200 m² - Polyurethane basketball courtsing
-MATRIX SPORTING CLUB - EGYPT - 1300 m² - Acrylic flooring, Flexfloor System
-SHERATON PARK - DOHA, QATAR - 1200 m² - Playground flooring
-SYMBIOSIS COLLEGE - INDIA - 1180m² - Acrylic sports courts
-PROFESSOR ABDULAZIZ ANQARI - RIYADH, KSA -1150m² - PU glue/Socccer field

-AL SAQID ISLAMIC ENGLISH SHCOLL-DUBAI,UAE-1100m²- Acrylic flooring, WET-POUR POLYFLEX AEL-EX

-FIRST POINT SCHOOLS - DUBAI, UAE - 1100m² - Acrylic sports courts

-MAADI BRITISH SCHOOL- EGYPT - 1100m², Multipurpose court, COLORFLEX system

-DUBAI AMERICAN ACADEMY - DUBAI, UAE - 1080 m² - Acrylic sports court

-PRELUDE PUBLIC SCHOOL - AGRA, INDIA - 1070m²- Acrylic sports courts

-ALMGBAL BREAK - RIYADH, KSA - 1050 m² - Rubber playground

-BANIYAS CLUB AND AL AIN ENGLISH SPEAKING SCHOOL - ABU DHABI, UAE - 1000m² - Acrylic flooring

-WADY DEGLA LOTUS PROJECT - CAIRO, EGYPT- 1000 m² - Acrylic flooring, Wet-Pour Polyflex AEL-EX system.

-MINISTRY OF EDUCATION - DAMMAM, KSA - 1000 m² - PU indoor multipurpose sports flooring

-SHEIKH OBEID MAKTHOUM PALACE - 1000m² - Outdoor polyurethane flooring

-INDIAN AIR FORCE - AGRA, INDIA - 1000m²- Acrylic sports courts

-INDIAN AIR FORCE - LUCKNOW, INDIA - 1000m²- Acrylic sports courts

-MULTIPURPOSE POLYURTEHANE INDOOR COURTS - F.Y.R.O.M - 1000m² - Polyflex PU-In system

-SODIC PROJECT - EGYPT - 1000m², Multipurpose court, COLORFLEX system

-INDIAN AIR FORCE - VARANASI, INDIA - 1000m²- Acrylic sports courts

-INTERNATIONAL SCHOOL OF CREATIVE SCHIENCE - SHARJAH, U.A.E - 1000m² - Safepol System

-INDIAN AIR FORCE - BIHTA, INDIA - 1000m²- Acrylic sports courts

-INDIAN AIR FORCE - DARBHANGA, INDIA - 1000m²- Acrylic sports courts

-AL AIN INDIAN SCHOOL - AL AIN, UAE - 1000m² - Football court

-DUBAI SCHOLRAS PRIVATE SCHOOL - DUBAI, U.A.E - 1000m² - Acrylic flooring in 2,2mm

-COMMUNITY COLLEGE - KHAMIS, KSA - 940 m² - Polyurethane indoor multipurpose sports flooring

-GEMS METROPOLE SCHOOL - DUBAI, U.A.E - 900 m² - Playground flooring

-MINISTRY OF EDUCATION - ABHA, KSA - 900 m² - Polyurethane indoor multipurpose sports flooring

-BAB AL SHAMS SPA HOTEL - DUBAI, UAE - 900m² - Football court

-KING KHALID UNIVERSITY - ABHA, KSA - 820 m² - Polyurethane indoor multipurpose sports flooring

-SCHOOL IN AL WAKRA CITY - DOHA, QATAR - 800m² - Polyurethane sports flooring

-SULTAN MANOR - RIYADH, KSA - 800 m² - Polyurethane multipurpose sports flooring

-MINISTRY OF EDUCATION - AL KHARIZ, KSA - 800 m² - PU indoor multipurpose sports flooring

-INDOOR SPORTS COURT - MALAYSIA - 800 m² - PU indoor sports flooring

-KID'S PLAY AREA IN MALL - MOROCCO - 800 m² - PU indoor sports flooring, POLYFLEX PU-IN system

-DUBAI ENGLISH SPEAKING COLLEGE - DUBAI, UAE - 783m² - Acrylic flooring, SPORTFLOOR-EX, HARD COURT

-SINGAPORE AIRLINES - SINGAPORE - 735m² - PU indoor sports flooring

-AL DAJAN COMPANY - GASIM, KSA - 722 m² - Polyurethane sports flooring/Tennis court

-SELECTIVE GOVERNMENT HIGH SCHOOL - EGYPT - 720m², Outdoor sports flooring

-INDIAN AIR FORCE - AHMEDABAD, INDIA - 720m²- Acrylic sports courts

-FITNESS TIME - FAYSALIA, DAMMAM, KSA - 700 m²-PU indoor multipurpose sports flooring/running track

-FITNESS TIME YASMEEN - RIYADH, KSA - 700 m² - PU indoor multipurpose sports flooring/running track

-FERRARI WORLD - ABU DHABI, UAE - 700m² - Playground flooring

-FITNESS TIME JUNIOR - RIYADH, KSA - 700 m² - PU indoor multipurpose sports flooring/running track

-FITNESS TIME - OLAYA RIYADH, KSA - 700 m² - PU indoor multipurpose sports flooring/ running track

-FITNESS TIME WAHA - RIYADH, KSA - 700 m² - PU indoor multipurpose sports flooring/running track

-FITNESS TIME, NOOR BRANCH - DAMMAM, KSA -700 m² - PU indoor sports flooring and running track

-FITNESS TIME, ALAMEEN BRANCH - DAMMAM, KSA - 700 m² - PU indoor sports flooring and running track

-FITNESS TIME, PLUS RIYADH - RIYADH, KSA - 700 m² - PU indoor sports flooring and running track

-FITNESS TIME, SALAMA BRANCH BRO & FITNESS - JEDDAH, KSA - 700 m² - PU indoor sports flooring

-FITNESS TIME, 40th BRANCH - JEDDAH, KSA - 700 m² - PU indoor sports flooring and running track

-NASR CLUB- EGYPT - 700m², Multipurpose court, POLYFLEX WET-POUR system

-HUREL DOUBLE 3 - RAS AL KHAIMH, KSA - 700 m² - Shockpad plus acrylic coatings

-THE SUSTAINABLE CITY - DUBAI, U.A.E - 700 m² - Acrylic flooring

-EMAAR - EMIRATES HILLS 2 - DUBAI, U.A.E - 700m² - Basketball court, Acrylic flooring

-AIRFORCE SURBOTO PARK - NEW DELHI, INDIA - 680 m² - Polyurethane outdoor sports flooring

-INDIAN ARMY - DHRANGDHARA, INDIA - 670m²- Acrylic sports courts

-MT.SAINT PATRICK ACADEMY - INDIA - 665m²- Acrylic sports courts

-REGIONAL HQ AT BURAIMI - OMAN - 650 m² - Colorflex, PU sport flooring

-ROYAL OMAN POLICE TASK FORCE RUSTAQ - OMAN - 650 m² - Colorflex, PU sport flooring

-ROYAL OMAN POLICE TASK FORCE LIWA - OMAN - 650 m² - Colorflex, PU sport flooring

-ROYAL OMAN POLICE TASK FORCE AL SALIL - OMAN - 650 m² - Colorflex, PU sport flooring

-ROYAL OMAN POLICE TASK FORCE IBRI - OMAN - 650 m² - Colorflex, PU sport flooring

-ROYAL OMAN POLICE TASK FORCE IBRA - OMAN - 650 m² - Colorflex, PU sport flooring

-ROYAL OMAN POLICE TASK FORCE AL SUR - OMAN - 650 m² - Colorflex, PU sport flooring

-ROYAL OMAN POLICE TASK FORCE AL DUKUM - OMAN - 650 m² - Colorflex, PU sport flooring

-ROYAL OMAN POLICE TASK FORCE AL BURAIMI - OMAN - 650 m² - Colorflex, PU sport flooring

-ROYAL OMAN POLICE TASK FORCE AL NIZWA - OMAN - 650 m² - Colorflex, PU sport flooring

-ROYAL OMAN POLICE TASK FORCE AL SUWAIQ - OMAN - 650 m² - Colorflex, PU sport flooring

-ABU DHABI MUNICIPALITY - ABU DHABI , UAE - 650 m² - Acrylic flooring

-ROYAL OMAN POLICE TASK FORCE AL SALALAH - OMAN - 650 m² - Colorflex, PU sport flooring

-ROYAL OMAN POLICE TASK FORCE AL BARKHA - OMAN - 650 m² - Colorflex, PU sport flooring

-ROYAL OMAN POLICE TASK FORCE KHOUDH - OMAN - 650 m² - Colorflex, PU sport flooring

-MULTIPURPOSE COURTS - TIRANA, ALBANIA - 650 m² - Acrylic sports flooring, FLEXFLOOR system

-MOHAMMED JASSIM M AL THANI SCHOOL - UMSALALALI, QATAR - 620 m² - PU outdoor sport flooring

-QATAR GEMS SCHOOL - DOHA, QATAR - 615 m² - Polyurethane sports flooring

-VAISHNO DEVI - DELHI, INDIA - 608 m² - Polyurethane outdoor sports flooring

-INDIAN ARMY - AGRA, INDIA - 600m²- Acrylic sports courts

-THE INTERNATIONAL SCHOOL - AGRA, INDIA - 600m²- Acrylic sports courts

-INDIAN ARMY - JHANSI, INDIA - 600m²- Acrylic sports courts

-THE SUSTAINABLE CITY - DUBAI, U.A.E - 600 m² - Safepol system

-AMITY SCHOOL, JUMEIRAH ISLAND - DUBAI, UAE - 600 m² - Safepol system

-OUR OWN ENGLISH HIGH SCHOOL - SHARJAH, U.A.E - 600 m² - Flexfloor system

-OUR OWN ENGLISH HIGH SCHOOL - SHARJAH, U.A.E - 600 m² - Polyflex Ael-EX system

-SKATING FOR KIDS - GUJARAT, INDIA - 600 m² - Sportfloor system

-NEW DUBAI BRADENTON SCHOOL- DUBAI, UAE - 570 m² - Acrylic sports courts

-DUBAI SILICON OSIS-CENTRAL PARK, DSO - DUBAI, UAE - 560 m² - Jogging track

-MPS WORLD SCHOOL - AGRA, INDIA - 560m²- Acrylic sports courts

-AL WUKAIR GIRLS SCHOOL - AL WAKRAH, QATAR - 550 m² - Polyurethane, outdoor sport flooring

-BBPS - DELHI, INDIA - 512 m² - Polyurethane outdoor sports flooring

-IVY STATE - PUNE, INDIA - 511m²- Acrylic sports courts

-KUNAL ICONIA - INDIA - 510m²- Acrylic sports courts

-AMERICAN SCHOOL OF DUBAI - DUBAI, UAE - Acrylic sports courts

-ETIHAD MUSEUM - JUMEIRAH, DUBAI, UAE - Rubber flooring
-CARPARKING - ABU DHABI, UAE - Acrylic flooring
-DUBAI MILLENIUM SCHOOL - QUSAIS, UAE - Acrylic sports courts
-AMERICAN UNIVERSITY - DUBAI, UAE – Acrylic outdoor sports flooring
-RAK ACADEMY - RAK, UAE - Acrylic flooring
-ISCS - SHARJA, UAE - Acrylic flooring
-THE INTERNATIONAL SCHOOL OF CHOUEIFAT - AJMAN, U.A.E - Sportground-Ex system
-THE KINDER GARDEN STARTERS - DUBAI, U.A.E - Safepol system
-AL ZAHIA PROJECT - SHARJA, UAE - Safepol system
-WADY DEGLA SHERATON CLUB - CAIRO, EGYPT - Acrylic sports flooring
-GEMS WELLINGTON SCHOOL - DUBAI, U.A.E - Safepol system
-JUMEIRAH RETAIL DEVELOPMENT - JUMEIRAH, DUBAI, UAE - Safety rubber flooring
-MR.ABDULRHMIN - JUBAIL, KSA - Rubber playground
-GEMS WESTMINISTER SCHOOL - DUBAI, U.A.E - Safepol system
-POLYURETHANE INDOOR SPORTS COURT - TIRANA, ALBANIA - Polyflex PU-In system
-MULTIPURPOSE COURTS - ODESSA, UKRAINE - Rubber flooring
-MULTIPURPOSE COURTS - ZHOVKVA, UKRAINE - Rubber flooring
-MUNICIPAL TENNIS CLUB - PATRA, GREECE - Flexfloor-EX system, Acrylic sports courts
-INDIAN AIR FORCE - GORAKHPUR, INDIA - Acrylic sports courts
-INDIAN AIR FORCE - BAREILLY, INDIA - Acrylic sports courts
-INDIAN ARMY - BABINA, INDIA - Acrylic sports courts
-ADAM AIRBASE PACKAGE 8, OMAN - Colorflex, PU sport flooring
-GOLD GYM - KOLKATTA, INDIA - Polyurethane indoor sports flooring
-MINISTRY OF FOREIGN AFFAIRS - ABU DHABI, UAE - Polyurethane flooring
-SHRJAH SPORTS CLUB - SHARJAH, UAE - Polyurethane flooring
-GEMS WINCHESTER SCHOOL - AL BARSHA SOUTH, UAE - Acrylic sports system
-HOTEL DOUBLE 3 - RAS AL KHAIMAH, UAE - Prefabricated shock-pad 4mm plus acrylic coatings
-ALNABBAGH STABLE - AL AIN, U.A.E - Polyurethane flooring, POLTRACK EQUESTRIAN FLOORING
-AL WAHDA CLUB - ABU DHABI, UAE - Rubber flooring
-ADJD MAIN BUILDING LANDSCAPE PROJECT - ABU DHABI, UAE - Rubber flooring
-KADEEJ AL KURBA SCHOOL - ABU DHABI, UAE - Rubber flooring
-INTERNATIONAL SCHOOL OF CREATIVE SCIENCE - SHARJA, U.A.E - Flexfloor system/Outdoor Multipurpose court
-ENVIRO, VATIKA HOTELS PVT.LTD - GURGAON, INDIA - Acrylic sports flooring
-ASHIANA - BHUBANESHWAR, INDIA - Acrylic sports flooring
-TCS, ADIBATLA - HYDERABAD, INDIA - Acrylic sports flooring
-IPS, ERODE - CHENNAI, INDIA - Acrylic sports flooring
-LIONS GATE - MUMBAI, INDIA - Acrylic sports flooring
-MORNING GLORY INFRA LIMITED - KANPUR, INDIA - Acrylic sports flooring
-NAMBIAR - BANGALORE, INDIA - Acrylic sports flooring
-PATHWAYS - GURGAON, INDIA - Acrylic sports flooring
-WELHAMS GIRLS SCHOOL - DEHRADUN, INDIA - Acrylic sports flooring
-WOODDUCK COMMERCIAL CENTER- IRAN - Industrial flooring
-ARABIAN RANCHES by EMAR - DUBAI, U.A.E - Playground flooring

-OUR OWN ENGLISH HIGH SCHOOL - SHARJAH, U.A.E - Playground flooring

-POLO CLUB GHANTOOT - ABU DHABI, U.A.E - Polyurethane flooring, POLTRACK EQUESTRIAN FLOORING

-RAK MODERN SCHOOL - RAS AL KHAIMAH, U.A.E - Playground flooring

-GIIS/GLOBAL INDIAN INTERNATIONAL SCHOOL - RAS AL KHAIMAH, U.A.E - Playground flooring

-MINISTRY OF EDUCATION, NAD AL HAMAR BOYS SCHOOL - DUBAI, U.A.E - Playground flooring

-K.G. KIDS SCHOOL - AALI, BAHRAIN - Playground flooring

-SABIC BEACH CAMPS PROJECT - JUBAIL, K.S.A - Outdoor sports flooring, artificial grass.

-MINISTRY OF EDUCATION, MIZHER GIRLS SCHOOL - DUBAI, U.A.E - Playground flooring

-WARSAN STABLE - Polyurethane flooring, POLTRACK EQUESTRIAN FLOORING

-AL SHIMAL PARK - DOHA, QATAR - Playground flooring

-UM SELAL PARK - DOHA, QATAR - Playground flooring

-AL KABAN PARK - DOHA, QATAR - Playground flooring

-GEMS METROPOLE SCHOOL - DUBAI, U.A.E - Hard court system/Outdoor Multipurpose court

-ARABIAN RANCHES by EMAR - DUBAI, U.A.E - Acrylic Outdoor Tennis and Basketball courts

-RAK MODERN SCHOOL - RAS AL KHAIMAH, U.A.E - Flexfloor system

-GIIS/GLOBAL INDIAN INTERNATIONAL SCHOOL - RAS AL KHAIMAH, U.A.E - Acrylic system

-AVALON HEIGHTS - AJMAN, U.A.E - Acrylic floorings

-DELHI PRIVATE SCHOOL - DUBAI, U.A.E - Acrylic flooring

-ROYAL COMMISSION SCHOOL - JUBALI, KSA - Acrylic sports flooring

-FITNESS TIME PRO - AL AHSA BRANCH - KSA - Flexfloor, Basketball court

-FITNESS TIME PRO - MAKKAH SHARAIE - KSA - Flexfloor, Basketball court

-BIN HAM - AL AIN, UAE - Polyurethane flooring

-SHAMMA BINT MOHAMMED SHOOOL - AL AIN, UAE - Polyurethane flooring

-ABDULLAH BIN OTAIBA - ABU DHABI, UAE - Polyurethane flooring

-LIWA INTERNATIONAL SCHOOL - AL AIN, U.A.E - Colorflex outdoor sport system.

-ZOHOUR KG - MANAMA, BAHRAIN - Polyurethane sports flooring

-RAWDA RASHED - QATAR- Polyurethane, outdoor sport flooring

-SAAD BIN ABI WAQAS SCHOOL - AL RAYYAN, QATAR - Polyurethane, outdoor sport flooring

-FITNESS TIME PRO - MADINS RING ROAD BRANCH - KSA - Flexfloor, Basketball court

-AGRA CHAIN - AGRA, INDIA - Acrylic sports flooring

-SUNWORLD - NOIDA, INDIA - Acrylic sports flooring

-SSN INVESTMENTS PRIVATE LIMITED, FRIENDS COLONY - DELHI, INDIA - Acrylic sports flooring

-AJNARA - NOIDA, INDIA - Acrylic sports flooring

-BRIGHT RIDERS SCHOOL - ABU DHABI, UAE - Running track, Acrylic sports court

-OUR OWN ENGLISH HIGH SCHOOL - SHARJAH, U.A.E - Poltrack Spaycoat system

-NCC - JAIS, INDIA - Acrylic sports flooring

-ALPHA FOUNDATION FOR EDUCATION & RESEARCH - TRICHIRAPALLI, INDIA - Acrylic sports flooring

-PUSHPANJALI FARMS - NEW DELHI, INDIA - Acrylic sports flooring

-M3M - MERLIN GURGAON, INDIA - Acrylic sports flooring

-NORTH LONDON COLLEGIATE SCHOOL - DUBAI, U.A.E - Playground flooring

-FOOT COURT - EGYPT - Running track, POLTRACK SPRAYCOAT system

-FITNESS TIME ANDALUS BRANCH - JEDDAH, K.S.A - Acrylic sports flooring, FLEXFLOOR SYSTEM

-ST.JOSEPHS WOMENS COLLEGE - ALLEPPEY, KERALA, INDIA - Polyurethane outdoor sports flooring

-WADY DEGLA SHERATON CLUB - CAIRO, EGYPT - Acrylic sports flooring

- RAILWAY SPORTS GROUND - GUNTAKAL, ANDRA PRADESH, INDIA - Acrylic sports flooring**
- TERVEL PROJECT - TERVEL, BULGARIA - Playground flooring, SAFEPOL system**
- INDOOR COURT - UKRAINE - Polyflex PU-In system**
- PRIVATE JOB - HYDERABAD, SOUTH INDIA - Acrylic outdoor sports flooring**
- RAILWAY SPORTS GROUND -GUNTAKAL, ANDRA PRADESH, INDIA-Acrylic outdoor sports flooring, 5 layers**
- MINISTRY OF EDUCATION U.A.E - Playground flooring**
- PLAYGROUND FLOORING - VARNA, BULGARIA - SAFEPOL System**

PAH TEST REPORT

PU BINDER 1118



Intertek Consumer Goods GmbH · Würzburger Straße 152 · 90766 Fürth · Germany

KATASKEVES DAPEDON LTD - KDF
MRS. Maria Nikolaidoy
Mitropoleos 19
54024 Thessaloniki
GREECE



Fürth, May 11/2020

TEST REPORT No. FUTYP2020-01959-A

Date sample received: March 06/2020
Period of testing: March 19/2020 – April 29/2020
Technical Director: Kerstin Scharrer

Sample description: PU Binder 1118



For the test results please refer to next pages

Intertek Consumer Goods GmbH
Würzburger Straße 152
90766 Fürth, Germany

Tel.: +49 911 74075 0
Fax: +49 911 74075 30
cg.germany@intertek.com

Sitz Fürth
Amtsgericht Fürth, HRB 5756
USt-IdNr. DE169317871

Geschäftsführer
Reinhold Gehling



Test order

Test of a product for migration of certain elements acc. to EN 71 part 3

Summary	Results
DIN EN 71-3 (Safety of toys) – Migration of certain elements	<i>pass</i>

Sample description:

No. 22:	PU binder
---------	-----------

Test results

Abbreviations:

n.d. = not determinable (< LoQ)

LoQ = limit of quantification

1. Migration of certain elements

1.1 Migration of certain elements -17 Elements- according to DIN EN 71-3

Sampling, extraction: DIN EN 71-3:2019-08

Measurement: ICP-OES: DIN EN ISO 11885:2009-09 / Hg: DIN EN ISO 17852:2008-04 (AFS)

Test results in mg/kg

Parameter	LoQ	limit value category III	Sample No. 22
Aluminium	10	70 000 (28 130) ^y	n.d.
Antimony	2	560	n.d.
Arsenic	1	47	n.d.
Barium	10	18 750	n.d.
Boron	10	15 000	n.d.
Cadmium	0.1	17	n.d.
Chromium (III)	3	460	n.d.
Cobalt	1	130	n.d.
Copper	10	7 700	n.d.
Lead	0.5	23	n.d.
Manganese	10	15 000	n.d.
Mercury	0.5	94	n.d.
Nickel	5	930	n.d.
Selenium	2	460	n.d.
Strontium	10	56 000	n.d.
Tin	3	180 000	n.d.
Zinc	10	46 000	n.d.

^y new limit for Aluminium valid as of May 20th, 2021; see directive (EU) 2019/1922

General note:

This report has been prepared for the titled project or named part thereof and should not be relied upon or used for any other project without an independent check being carried out as to its suitability and prior written authority of Intertek being obtained. Intertek accepts no responsibility or liability for the consequences of this document being used for a purpose other than the purposes for which it was commissioned. Any person using or relying on the document for such other purposes agrees, and will by such use or reliance be taken to confirm his agreement to indemnify Intertek for all loss or damage resulting therefrom. Intertek accepts no responsibility or liability for this document to any party other than the person by whom it was commissioned.

We would like to point out, that Intertek can't provide legally binding assessments referring to isolated cases. The individual legal advice in Germany is reserved to the legal advisory professions and a binding interpretation is subject to the court of justice.

Copying excerpts or otherwise reproducing parts of the test report is permitted only with the consent of the laboratory accepting the order. This report pertains only to the test item(s).

All testing requests are subject to our Terms and Conditions available on www.intertek.com.

END OF REPORT



1.2 Migration of certain elements -Chromium VI- according to DIN EN 71-3

Sampling, extraction: DIN EN 71-3:2019-08
Measurement IC- Matrix Elimination

Test results in mg/kg

	LoQ	limit value category III	Sample No. 22
Chromium VI	0.01	0.053	n.d.

Conclusion

The tested sample of the presented product "**PU Binder 1118**" conforms to the requirements of DIN EN 71 Part 3 category 3.

PHOTOGRAPHS OF PROJECTS



INDOOR SPORTS FLOORING

WET-POUR POLYFLEX AEL-IN

Indoor highly flexible shock-absorbent, acrylic sports flooring system, ideal for multipurpose halls, gym floors, tennis, basketball, volleyball, handball, futsal courts, as well as any other indoor sports court.

Combination of a mixture of **PU BINDER** and **SBR granules**, in granulometry of 0.5-2mm and special top coatings for sports flooring.



Steps:

1. PU PRIMER 870 - Special, polyurethane primer.

Applied by airless sprayer or brush on asphalt surfaces or on waterproof concrete surfaces without rising humidity issues.

2. Mixture of PU BINDER 1118 plus RECYCLED RUBBER 858 - Elastic, shock-absorbent, wet-pour mixture (minimum 6mm).


The **RECYCLED RUBBER 858** is in granulometry of 0.5-2mm. The mixture is applied by paving machine in thickness from 6mm up to 14mm or more.

3. ELASTOTURF 851S - Acrylic, elastic, smooth, coating for sports floors systems.

Consists of acrylic resins, powder quartz sand and special improver. It is combined with **ISOPOL 854** as substrate to create multi-purpose sports flooring systems. Highly resistant to adverse weather conditions (snow, frost, heat waves etc.) after drying. Applied by squeegee in three layers at least.

4. POLYSPORT 952 - Polyurethane, aliphatic, two-component top coating for indoor sport floorings.

Applied, in two crossing layers by airless sprayer or short haired mohair roller.

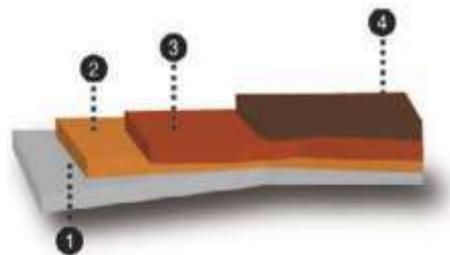

Description	Consumption
PU PRIMER 870 - Special, polyurethane, primer.	0.2-0.3kg/m ² for 2 layers
PU BINDER 1118 - Polyurethane binder.	1.2kg/m ² for 10mm mixture
RECYCLED RUBBER 858 - SBR granules in granulometry of 0.5-2mm.	6kg/m ² for 10mm mixture
ELASTOTURF 851S - Acrylic, elastic, smooth coating for sports floors systems.	3.5-3.8kg/m ² for 3 layers
POLYSPORT 952 - Polyurethane, aliphatic, two-component top coating for indoor sport floorings.	0.35kg/m ² for 2 layers

SYSTEM WET – POUR POLYFLEX AEL – IN

Total thickness of 8mm – 14mm



Indoor highly flexible shock-absorbent, acrylic sports flooring system ideal for multipurpose halls, gym floors, tennis, basketball, volleyball, handball, futsal courts (shoes without spikes), as well as any other indoor sports court. Combination of a mixture of PU BINDER and SBR granules, in granulometry of 0.5-2mm and special top coatings for sports flooring.

Steps :

1. **PU PRIMER 870 - Polyurethane primer.** Applied by airless sprayer or brush.
2. **Mixture of PU BINDER 1118 plus RECYCLED RUBBER 858 (minimum 6mm) - Elastic, shock-absorbent, wet-pour mixture.** The mixture is applied by paver machine in thickness from 6mm up to 14mm or more.
3. **ELASTOTURF 851S - Acrylic, elastic, smooth, coating for sports floors systems.** Applied by squeegee in three layers at least.
4. **POLYSPORT 952 - Polyurethane, aliphatic, two-component top coating for indoor sport floorings.** Applied, in two crossing layers by airless sprayer or short haired mohair roller.

Preparation – Application

Applied only on dry waterproof concrete surfaces (over 40 days old from date of placement) without rising humidity issues and free of materials that might prevent bonding e.g. dust, loose particles, grease etc. The success in the application depends on the right preparation of the underlay and use of the material.

- **Good, dry** cleaning of the surface from dust and residues with vacuum cleaner and squeegees.
- Priming of the surface with **PU PRIMER 870** for the proper adhesion on the sub-floor. Application of two or more layers in sections each time, right before the application of the next material, in order to ensure proper adhesion, until the surface is saturated. Avoid the creation of puddles of the material. Consumption: 200-300gr/m² in two layers, depending on the absorption of the underlay.
- When the primer begins to dry (approximately 1 hour depending on the ambient temperature), follows the application of wet-pour shock-absorbent mixture by paver machine in the desired thickness or even by hand if the applicator is very experienced with a straightedge and a flat trowel, using also a cylinder for final compacting. **The wet-pour shock-absorbent mixture consists of SBR granules** in 0.5-2.0 mm granulometry **and PU binder.** It is strongly recommended the application of the mixture during night hours in the Middle East countries during summer months.
- As soon as the mixture dries (48 hours at 30°C), follows the application of **ELASTOTURF 851S in at least 3 crossing layers.**

- Depending on the ambient temperature **ELASTOTURF 851S** is diluted with 2% water, prior to application, in order to achieve better fluidity. It is applied in three or more coatings by squeegee, depending on the desired thickness. The next layer follows the other after the previous starts to dry. Consumption : 3,5-3,8 kg/m² (3 layers)
- The next day, depending ambient temperature follows application of finishing paint **POLYSPORT 952** in 2 crossing layers by a short-haired mohair roller or even better by airless sprayer. Consumption: 0,35 kg per square meter in 2 layers.

Important Remarks

- During temperatures over 40 degrees, ideal time for the application of **WET-POUR POLYFLEX AEL-IN SYSTEM** is between 22:00 and 09:00 and the minimum bearing temperature during application and drying should be over 10°C.
- In case the second layer of PU top coat is applied after more than 24 hours of the application of the first one then the whole surface must be sanded by a special sanding machine. After that the second layer can be applied.
- The freshly coated surface should be protected from high temperatures, wind, rain and frost for at least the first 24 hours.
- In case it gets damaged, it is simply repaired and recoated on the spot.

Substrate

Asphalt is the safer subfloor for sport floorings for sure and must be always preferred than concrete surfaces.


A. Asphalt Substrate

The asphalt must have a slope of 0.7-1% and must dry for at least 30 days so that all solvents from the asphalt can evaporate.

The asphalt sub-floor should be applied on well compacted 150mm road base sub-floor and asphalt should be laid in one layer (and not 2) in 6 to 8cm with fine and coarse aggregates (up to 15mm granulometry) like the kind of asphalt used in road construction.

So, new road-grade asphalt will have to be laid (minimum 60mm) in one layer containing coarse aggregates and then mature for 30 days at least, before any application takes place on top of the asphalt to avoid bubbles on the final layer of the sport or rubber floorings.

Asphalt Infrastructure

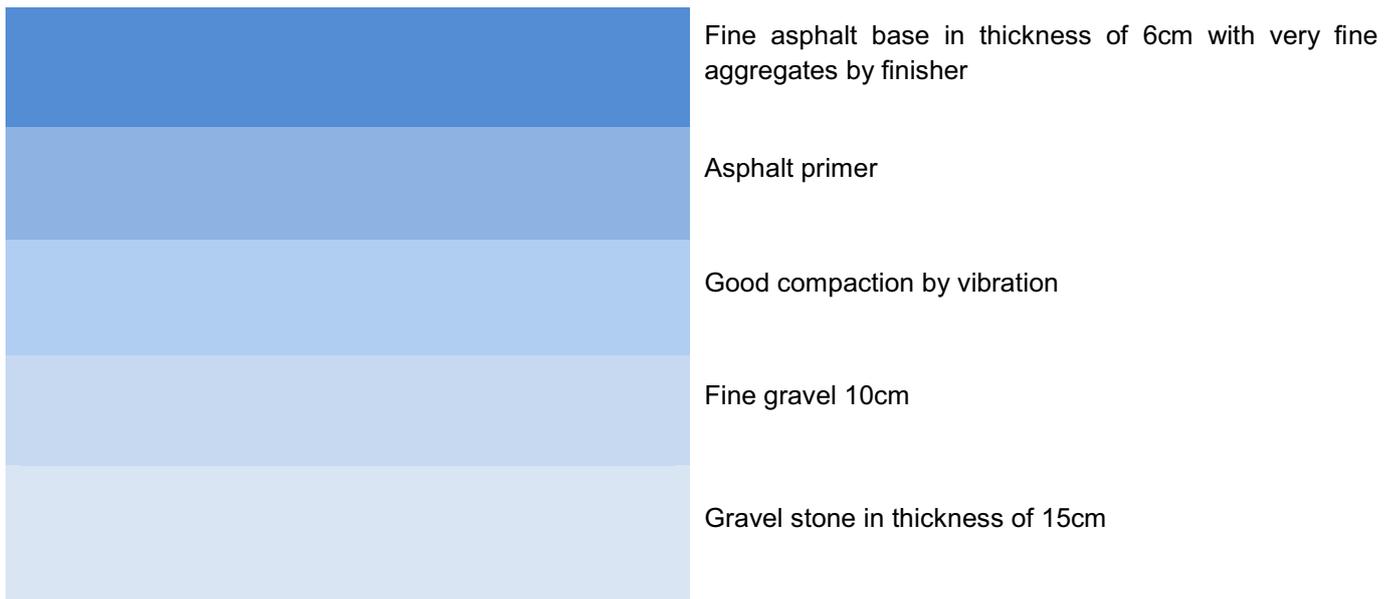


B. CONCRETE SURFACES

Concrete surface must be power-trowelled without cracks and must be smooth with a slope of 0.7-1% and humidity under 4% in 10cm depth of concrete.

Concrete must also be **dry at least for 40 days** and then the application takes place if there is no rising humidity for the sub-floor. Before the application takes place, there must be proper grinding of the surface by a grinding machine to open the pores accordingly and also a measurement by special instrument to measure humidity on the surface and in 10cm under the surface.

Generally concrete is a risky sub-floor and there may be problems with rising humidity, especially in areas where the sea level is really high and when the sea is close or in areas near greenery.

Always make expansion joints in large areas of concrete, in order to avoid uncontrollable cracks and failures. Joints should be every 25 square meters creating a grid of 5x5 meters or close to that.

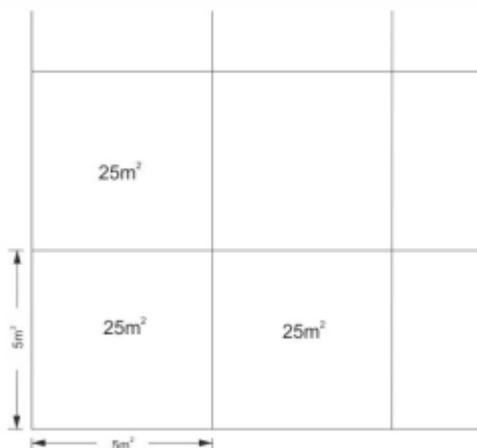

<u>SUBSTRATE REQUIREMENTS</u>	Concrete quality	at least C20/25
	Age:	at least 40 days
	Moisture content:	below 4%

Tools:



AIRLESS SPRAYER



BRUSH



PAVING MACHINE



FLAT TROWEL



STRAIGHTEDGE



CYLINDER



SANDING MACHINE



SQUEEGEE



SHORT HAIRD MOHAIR ROLLER

Colors: Following colorchart.



The colors may vary slightly from the original due to digital representation.



The colors may vary slightly from the original due to digital representation.

PU PRIMER 870

TRANSPARENT, ONE COMPONENT, POLYURETHANE-BASED PRIMER, USED AS AN ADHESIVE COMPONENT BETWEEN SUBFLOOR AND SPORTS SYSTEMS

GENERAL CHARACTERISTICS

POLYURETHANE PRIMER 870 is a clear, polyurethane-based, one-component primer, which is used as an adhesive component between the sub-floor and sport systems.

- Penetrates in depth.
- Ideal for old and new surfaces.

TECHNICAL DATA

Basis:	one-component polyurethane
Appearance:	liquid
Color:	transparent
Viscosity:	50 – 250 mPa s at 25°C
Density:	0.9- 1.0 Kg/Lt
Temperature for the application and drying of the material:	10 – 40°C

PREPARATION-APPLICATION

Applied on dry surfaces without rising humidity issues, free of materials that might prevent bonding e.g. dust, loose particles, grease etc (in case of asphalt or concrete).

The success in the application depends on the right preparation of the underlay and use of the material.

- **Good, dry** cleaning of the surface from dust and residues.
- Priming of the surface with **PU PRIMER 870** applied by airless sprayer equipment or brush, roller. The base layer (wet-pour mixture of SBR and PU BINDER 1118) should be constructed while **PU PRIMER 870** is still a bit sticky. Curing takes place at ambient temperature by evaporation of the solvent and reaction with atmospheric moisture. High temperatures and moisture will shorten the cure time. **PU PRIMER 870** is applied in two or more layers as a thin film, and on the final layer, wet-pour mixture of SBR and PU BINDER 1118 can be applied on sticky surface.
- The temperature should not fall below 10° C during curing.
- Opened drums should be used up quickly.
- The layer (wet-pour mixture of SBR and PU BINDER 1118) should be constructed while the final layer of **PU PRIMER 870** is still sticky.
- **NOTE: Rain will cause the primer to lose its function! If the primer was affected by rain, the base layer should not be constructed! Instead, the sub floor has to dry and the primer application has to be repeated.**

CONSUMPTION

200-300 gr/m² depending on the type and the absorbency of the underlay.

APPLICATION TOOLS

Brush and airless sprayer. Tools should be cleaned with a PU solvent immediately after use.

PACKAGING

Drums / Barrels.

STORAGE

One year in unopened containers in cool and dry places, out of sunlight, with minimum temperature 5°C and maximum temperature 30°C.

REMARKS

- Working time of **POLYURETHANE PRIMER 870** decreases when ambient temperature rises.
 - Prolonged storage of partially used containers containing **POLYURETHANE PRIMER 870** must be avoided as contact with atmospheric moisture will result in skinning and clouding of the product.
-

CAUTION

The application must take place in well-aired places using protective gloves. Skin or eye contact must be avoided, otherwise wash carefully with soap and water.

For more information consult the safety data sheet.

The information given here is true, represents our best knowledge and is based not only on laboratory work, but also on field experience. However, because of numerous factors affecting results we offer this information without any guarantee and no patent liability is assumed. For additional information or questions, contact the technical department of KDF LTD.

PU BINDER 1118

POLYURETHANE BINDER

GENERAL CHARACTERISTICS

100% solids, aromatic, polyisocyanate-prepolymer, moisture-curing binder based on diphenylmethane diisocyanate. It is MDI based and solvent free and has low viscosity. It exhibits excellent adhesion to all rubber granules and gives a strong performance both in terms of tensile strength and durability.

It is mixed with **RECYCLED RUBBER 858** or **EPDM granules** for the creation of the elastic safety flooring **SAFEPOL MULTICOLOR** or other flexible rubber floorings, ideal for playgrounds, athletic tracks, schools etc. Combines and bonds RIM components, polyurethane granules and sponge particles. Also it can be used as lining for insulation and for pasting.

TECHNICAL DATA

Density of mixture (25°C)	app. 1.08 – 1.18 Kg/Lt
Viscosity (25°C)	4.000 - 8.000 mPa.s
Pot-life (25°C)	30-75 min.
Application temperature	Min 10°C
Curing (25°C and %60 relative humidity)	After 24 hours it cures.

PREPARATION-APPLICATION

Applied on dry surfaces without rising humidity issues, free of materials that might prevent bonding e.g. dust, loose particles, grease etc (in case of asphalt or concrete). The success in the application depends on the right preparation of the underlay and use of the material.

Good, dry cleaning of the surface from dust and residues using vacuum cleaner and squeegees.

Can be used for kids playground, running tracks, sports grounds, walkways and offices.

Moulded in production: Rubber granules and binder are thoroughly mixed, taken into moulds, and then pressure is applied. 160 bar pressure, mold temperature of 130 degree gives reasonable results in 12 - 15 minutes. In molding applications, binder content should not fall below 5%.

On-site applications: **Applied on dry surfaces, free of materials that might prevent bonding e.g. dust, loose particles etc (in case of asphalt or concrete).** The success in the application depends on the right preparation of the underlay and use of the material.

- **Good, dry** cleaning of the surface from dust and residues.
- Priming of the surface with the special **POLYURETHANE PRIMER 870** in two layers.
- Good mixing of the **PU BINDER 1118** and the **RECYCLED RUBBER 858**. Mixing should be performed using a low revolution mixer (300-600 rpm) for 1-2 min. Stirring of the mixture should be performed thoroughly near the sides and bottom of the container in order to achieve homogeneity.
- Following, the mixture is poured on the surface and spread on the desired thickness using paving machine or by hand, if the applicator is experienced, with rake for spreading, (wooden) straightedge for initial smoothing, flat metal trowel for final smoothing and compacting, cylinder weighing 8-15kg for final compacting-(cylinder should be cleaned repeatedly with diesel to remove stuck granules from its surface).
- The application procedure for **SAFEPOL MULTICOLOR (PU BINDER 1118 and EPDM 856 mixture)** on top of asphalt or waterproof concrete directly is the same as for

SAFEPOL MIXTURE (the mixture of **PU BINDER 1118** and **RECYCLED RUBBER 858**).

RATIO MIXTURE

- 16% **PU BINDER 1118** and 84% **RECYCLED RUBBER 858**, for sports flooring.
 - 14% **PU BINDER 1118** and 86% **RECYCLED RUBBER 858**, for playground flooring.
 - 17% **PU BINDER 1118** and 83% **EPDM 856**.
-

PACKAGING

220kg in barrels.

STORAGE

12 months in unopened containers in cool and dry places, out of sunlight, with minimum temperature 5°C and maximum temperature 30°C.

REMARKS

- Concrete humidity should not be above 4%, ambient humidity should be at least 40% and most 80%. To begin the application, must wait for the appropriate humidity.
 - Working time of **PU BINDER 1118** decreases when ambient temperature rises.
 - Prolonged storage of partially used containers containing **PU BINDER 1118** must be avoided as contact with atmospheric moisture will result in skinning and clouding of the product.
-

CAUTION

The application must take place in well-aired places using protective gloves. Skin or eye contact must be avoided, otherwise wash carefully with soap and water.

For more information consult the material safety data sheet.

The information given here is true, represents our best knowledge and is based not only on laboratory work, but also on field experience. However, because of numerous factors affecting results we offer this information without any guarantee and no patent liability is assumed. For additional information or questions, contact the technical department of KDF LTD.

SBR RUBBER GRANULES 858

GENERAL CHARACTERISTICS

It can be used in sports facilities as infill in synthetic grass with the parallel use of round sand and also as one of the components in case of cast applied wet-pour systems for playground floorings or as shock-pad for sport subfloors in athletic tracks and sports fields.

Rubber granule is derived from car and truck tires. During processing, the tires are mechanically granulated, removing all metal and synthetic fibers, as well as any other foreign part contained in there with specially designed sieves, so as to produce a 99.99% clear rubber with high quality.

PROPERTIES

- 100% recyclable
- Long life
- Resistance to adverse weather conditions
- High shock absorbency and vibration damping
- High abrasion resistance

PREPARATION-APPLICATION

In sports facilities and playgrounds to ensure flexibility of surface and vibration absorption.

TECHNICAL CHARACTERISTICS

Granulometry 1-3mm

DENSITY:	0.48kg/cm ³
SPECIFIC GRAVITY	1.20+/- .05 (Water = 1.0)
HARDNESS	60
HUMIDITY(%)	<0.65
ELASTICITY	100% - No change
RESISTANCE	113N/cm - Excellent

PACKAGING

Packaging is available in big-bags -1 ton in following sizes:

Grain size	0,5-1,5 mm
Grain size	0,5-2,5 mm
Grain size	0.5-4.0 mm
Grain size	2-8 mm
Grain size	8-20 mm
Grain size	80-50 mm
Grain size	80-120 mm

ELASTOTURF 851S - SMOOTH

SPECIAL, ELASTIC, SMOOTH COATING FOR INTERNAL SPORT COURTS

GENERAL CHARACTERISTICS

ELASTOTURF 851S is acrylic-based, elastic, smooth colored coating for internal sport courts.

Is combined with prefabricated shock- pad roll in thickness of 4mm to 14 mm or a wet-pour mixture of **SBR granunles** (0.5 – 2.0 mm granulometry) **plus PU BINDER** in order to seal the pores and plasticize the floor.

- Ideal for multipurpose courts, basketball, volleyball, handball, football and tennis internal courts. Suitable for sports centers, schools, fitness centers, hallways.
- Applied easily, having low cost.
- Provides a safe, high quality game.

TECHNICAL DATA

Basis:	one-component acrylic resin
Appearance:	viscous liquid
Colors:	available in 24 colors form KDF colorchart
Temperature for the application and drying of the material:	10 – 40 °C
Viscosity:	22.000 – 32.000 mPa s at 25°C
Density	1.70 – 1.80 Kg/Lt
Walkability:	after 24 hours at 25°C
Total Hardening:	5 days at 25°C

PREPARATION-APPLICATION

Applied only on dry surfaces, without rising humidity issues and free of materials that might prevent bonding e.g. dust, loose particles, grease etc. The success in the application depends on the right preparation of the underlay and use of the material.

- **Good, dry** cleaning of the surface from dust and residues with vacuum cleaner and squeegees.
- Application of the material (in three or more layers) on prefabricated shock-absorbent rolls in thickness of 4mm to 14mm or on wet-pour made from the mixture of **RECYCLED RUBBER 858 (0.5 -2.0 mm granulometry)** and **PU BINDER 1118** (in three or more layers), for sealing the pores of the underlay and plasticize the surface.
- Depending on the ambient temperature, **ELASTOTURF 851S** is diluted with 2-3% water, prior to application, in order to achieve better fluidity. The next layer is applied after the previous starts to dry.
- Before the application of the second layer and after the application of the final layer (before applying **TOP COAT POLYSPORT 952**), always use a sanding machine.
- The next day, depending on the ambient temperature follows the application of **TOP COAT POLYSPORT 952** in 2 crossing layers by a short-haired mohair roller or even better by airless sprayer.

CONSUMPTION

- 2.2 – 2.5 kg/m² (three layers on shock-pad)
 - 3.5 – 3.8 kg/m² (three layers on wet-pour shock-pad)
-

APPLICATION TOOLS

Squeegee. Tools should be cleaned with **WATER** immediately after use.

PACKAGING

Supplied in barrels of 200 Kg.

STORAGE

12 months in unopened containers in dry places with minimum temperature 5°C and high temperature 30°C (avoid sunlight).

REMARKS

- During temperatures over 38 C, ideal time for the application of **ELASTOTURF 851S** is between 22:00-9:00 a.m. and the minimum bearing temperature during application and drying should be 10 C.
 - The freshly coated surface should be protected from high temperatures and frost for at least the first 24 hours.
 - In case it gets damaged, it is simply repaired and recoated on the spot.
-

CAUTION

The application must take place in well-aired places using protective gloves. Skin or eye contact must be avoided, otherwise wash carefully with soap and water.

For more information consult the safety data sheet.

The information given here is true, represents our best knowledge and is based not only on laboratory work, but also on field experience. However, because of numerous factors affecting results we offer this information without any guarantee and no patent liability is assumed. For additional information or questions, contact the technical department of KDF LTD.

POLYSPORT 952-SEMIMAT

POLYURETHANE-BASED, TWO-COMPONENT, SEMIMAT, FINISH ALIPHATIC COATING

GENERAL CHARACTERISTICS

POLYSPORT 952-SEMIMAT is a polyurethane, two-component, solvent-based, semi-mat, finish aliphatic coating for indoor sports surfaces.

- It is applied on polyurethane, self-leveling coating **POLYSPORT PU 951** as a final, sealing layer of a multilayer polyurethane floor especially designed for sport halls such as tennis, basketball, handball, volleyball and multipurpose halls.
- Applies easily with short-haired mohair roller and airless sprayer.
- Provides a surface with anti-slip properties.

TECHNICAL DATA

Basis:	two-component polyurethane paint
Appearance:	liquid
Colors:	KDF colorchart
Viscosity(25 ⁰ C):	1000-3500 mPas
Density(25 ⁰ C):	1.38-1.48 kg/lt
Mixing proportion (A:B):	85:15 by weight
Temperature for the application and drying of the material:	15 – 40°C

PREPARATION-APPLICATION

Applied on dry surfaces without rising humidity issues, free of materials that might prevent bonding e.g. dust, loose particles, grease etc (in case of asphalt or concrete). The success in the application depends on the right preparation of the underlay and use of the material.

- **Good, dry** cleaning of the surface from dust and residues using vacuum cleaner and squeegees.
- Caution must be taken so that temperature of the support surface as well as ambient air remains above 15°C during application and curing of the materials while relative humidity does not exceed 75%.
- Application of prefabricated sub-floor **ISOPOL 854** using **PU FLEX 140** or wet-pour rubber cushion mix of SBR rubber and **PU BINDER 1118**.
- Sealing of surface porosity of **ISOPOL 854** or the wet-pour rubber cushion mix of SBR rubber and **PU BINDER 1118** using elastic pore sealer **POLYSPORT STUCCO 950** and application of self-leveling coating **POLYSPORT PU 951**.
- The next day, depending on the ambient temperature follows the application of **POLYSPORT 952-SEMIMAT** in two crossed layers. The second layer is applied after the first layer has dried (within 24h). Components A & B (hardener) packed into separate containers in fixed weight proportions are mixed together using a low revolution mixer (300-600 rpm) for 1-2 min. Stirring of the mixture should be performed thoroughly near the sides and bottom of the container in order to achieve uniform dispersion of the hardener.
- The application is done by airless sprayer or short-haired mohair roller in 2 crossing layers.

CONSUMPTION

App.200-250 gr/m², for two layers.

APPLICATION TOOLS

Short-haired mohair paint roller or airless sprayer. Tools should be cleaned with **PU SOLVENT** immediately after use.

PACKAGING

Supplied in set of 20 Kg (two drums).

STORAGE

12 months in unopened containers in dry places with minimum temperature 5°C and maximum temperature 30°C (avoid sunlight).

REMARKS

- In case the layer of PU top coat is applied after more than 24 hours of the application of the last layer of PU pore filler then the whole surface must be sanded by a special sanding machine. After that the PU top coat can be applied.
 - In case the second layer of PU top coat is applied after more than 24 hours of the application of the first one then the whole surface must be sanded by a special sanding machine. After that the second layer can be applied.
 - Working time of **POLYSPORT 952-SEMIMAT** decreases when ambient temperature rises.
 - Prolonged storage of partially used containers containing **POLYSPORT 952-SEMIMAT** must be avoided as contact with atmospheric moisture will result in skinning and clouding of the product.
 - All surfaces should be thoroughly cleaned from dust and residues prior each application.
 - After hardening **POLYSPORT 952-SEMIMAT** is completely safe for health.
-

CAUTION

The application must take place in well-aired places using protective gloves. Skin or eye contact must be avoided, otherwise wash carefully with soap and water.

For more information consult the safety data sheet.

The information given here is true, represents our best knowledge and is based not only on laboratory work, but also on field experience. However, because of numerous factors affecting results we offer this information without any guarantee and no patent liability is assumed. For additional information or questions, contact the technical department of KDF LTD.

CLEANING AND MAINTENANCE MANUAL FOR :

-INDOOR SYSTEMS

Introduction

Indoor sports surfaces are made of extremely durable polymers, designed to withstand intense use. However for the best maintenance of the rubber and sport surface a regular check (once in 6 months) is required and maintenance of the surface is necessary to preserve the suitability of the surface.

The installer's guarantee will usually be conditional on the recommended maintenance requirements being carried out with due diligence.

Maintenance

Maintenance procedures are necessary to preserve the lifetime of the surface and to ensure that:

- The Surface is kept clean.
- The Surface is safe for intense diverse use and all types of users.
- The facility looks attractive.

These objectives are achieved by:

- Sweeping/scraping/removing debris and foreign matter from the surface.
- Regularly washing the surface to remove contaminants such as any kind of food, small stones, drinks or any other particle that can create scratches or damage.

Maintenance Equipment

Meticulous (mechanical) cleaning, occasional washing and dirt/foreign matter removing are the basic maintenance measures, apart from making sure that no damage occurs due to unforeseen reasons.

A mechanical vacuum cleaner is ideal for removing foreign matter and dirt. Restricted areas may have to be cleaned by hand.

The equipment should be well maintained and carefully operated to avoid contamination of, or physical damage to, the surface. Spillage of fuel or lubricating oil will damage the surface.

The pressure loading on the surface as well as the friction and shearing loads have to be kept to a minimum to prevent damage to the surface. Large pneumatic tires and soft brushes along with careful operating of the machinery, is recommended to avoid any damage on the surface.

Note that no aggressive chemical cleaning agents (chlorine or acid-based) should be used; normal neutral market detergents are adequate.

Prevention of damages

To ensure maintaining the surfaces to a high standard, restrictions should be imposed on the use of the surface.

- No chemicals, oils, fuel or solvents or many kind of drink and food should be allowed on the surface.
- No fireworks or cigarettes or high heels or inadequate shoes should be allowed on the synthetic surface .

Damages and renovation

The lifetime of an indoor sports surface depends on its quality, usage and level of maintenance. In general a normal indoor sports surface used intensively will last 8 to 10 years(depending on the system) before renovation is required. Renovation should be carried out periodically to prevent the total damage of the surface, which would necessitate complete renewal.

Renovation must be carried out by professional and skilled contractors with thorough knowledge of this type of work

There are different procedures for the renovation of a surface:

- Complete renewal by replacing the worn-out surface with a new sports flooring system.
- Re-topping or sealing with adequate polyurethane or acrylic materials. In general, one could refresh the indoor sports floor by applying couple of additional layers of PU top coat after 10-12 years.
- Partial re-topping in particular worn-out areas.

Information contained in this document is of general nature and is given in good faith. As the state of the surface and the use and application of the various cleaning products, is out of our control, our advice for individual cases, verbal, written or based on tests, does not exempt the applicator from the testing the suitability of the cleaning products and their applications.

The above maintenance guide refers to the below KDF systems:

-SYSTEM POLYFLEX PU-IN

-SYSTEM POLYFLEX PU-IN WET-POUR

-SYSTEM POLYFLEX AEL-IN

-SYSTEM POLYFLEX AEL-IN WET-POUR

CERTIFICATES OF KDF Ltd



ISO KDF Ltd



POLTRACK SPRAYCOAT



POLTRACK SANDWICH



POLYFLEX AEL-EX



FLEXFLOOR-EX



SPORTFLOOR-EX



SPORTFLOOR-EX FAST




POLTRACK EQUINE



BADMINTON POLYFLEX PU

CERTIFICATES OF KDF Ltd

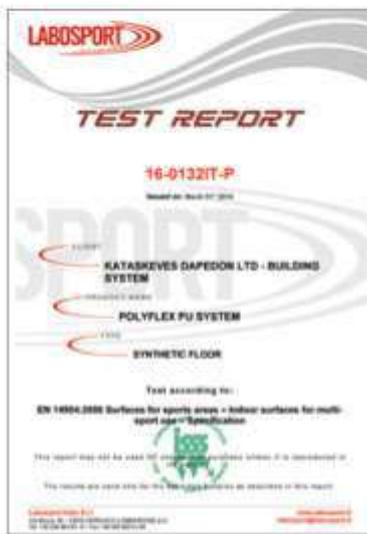

POLYFLEX PU



SPORTGROUND-EX



POLTRACK JOGGING TRACK



FIBA POLYFLEX PU



SAFEPOL



SAFEPOL



EPDM 856



SAFEPOL SANDPROOF



SAFEPOL SANDPROOF

CERTIFICATES OF KDF Ltd



PLAYPREM



POLTRACK FULL-PU



PU GRASS 149



PAH TEST REPORT
PU BINDER 1118



PAH TEST REPORT
PU BINDER 1125 AL



PAH TEST REPORT
EPDM 856



PAH TEST REPORT
PU BINDER plus EPDM 856