


JOGGING TRACKS

POLTRACK JOGGING TRACK SHOCKPAD-EPDM SYSTEM - 18mm

Elastic, seamless, flexible colored flooring, ideal for jogging track in thickness of 18mm.


It consists of a shock-pad base of 2 layers, first layer is a base layer of prefabricated, shock-pad roll in thickness of 10mm and second layer a base of flexible, colored epdm granules(0.5-1.5mm) in thickness of 6mm. Then follows a PU flexible pore filler coating, **POLYSPORT STUCCO 1050**, in 2 layers and a sealing PU, UV-resistant aliphatic top layer, **POLYSPORT 1052**, in two crossing layers.

Applied only on dry asphalt and waterproof concrete surfaces (over 30 days old from date of placement) without rising humidity issues and free of materials that might prevent bonding e.g. dust, loose particles, grease etc. The success in the application depends on the right preparation of the underlay and use of the material.

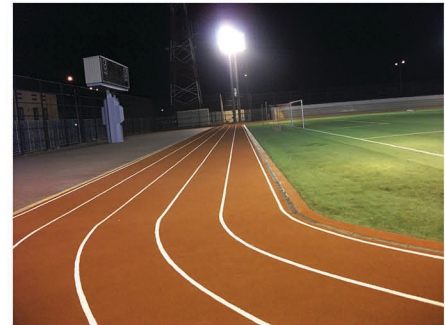

Steps:

1. **PU FLEX - Special, polyurethane adhesive.**
Used for the application of **ISOPOL 854** shock-pads or other prefabricated shock-absorbent rolls made from recycled rubber or EPDM.
2. **ISOPOL 854 - Shock-pad in rolls.**
Elastic, prefabricated shock-pad made of recycled rubber providing shock-absorbency, in thickness of 10mm. Used as cushion substrate before the application of polyurethane or acrylic systems.
3. **Mixture of PU BINDER 1118 and EPDM**
(in granulometry of 0.5-1.5mm) is applied in 6mm by paving machine.
4. **POLYSPORT 1052 - UV-resistant, polyurethane, aliphatic, two-component top coating for outdoor sports floorings.**
Applied in two crossing layers, by airless spray or rollers.

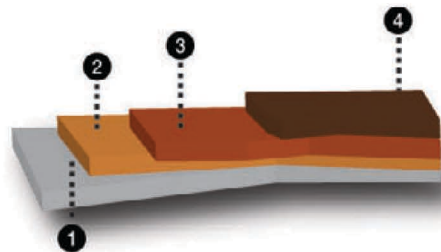

Description	Consumption
PU FLEX - Special, polyurethane adhesive.	0.7-0.8kg/m ²
BASE LAYER 10mm	
ISOPOL 854 - Shock-pad in rolls.	
TOP LAYER 6mm	
PU BINDER 1118 - Polyurethane binder.	1.2kg/m ²
EPDM in granulometry of 0.5-1.5mm.	6.0kg/m ²
SEALING LAYER 1.5mm in 2 layers	
POLYSPORT STUCCO 1050 - PU pore filler	1.3-1.5kg/m ²
TOP COATING 0.5mm in 2 layers	
POLYSPORT 1052 - UV-resistant, polyurethane, aliphatic, two-component top coating for outdoor sports floorings.	0.25kg/m ²