

JOGGING TRACKS

POLTRACK JOGGING TRACK SHOCKPAD ISOPOL - 12mm

Elastic, seamless, flexible colored flooring, ideal for jogging track in thickness of 12mm.

It consists of a prefabricated shock-pad roll in thickness of 10mm and of a sealing PU, UV-resistant aliphatic top layer, **POLYSPORT 1052**, in two crossing layers.


Applied only on dry asphalt and waterproof concrete surfaces (over 30 days old from date of placement) without rising humidity issues and free of materials that might prevent bonding e.g. dust, loose particles, grease etc.

The success in the application depends on the right preparation of the underlay and use of the material.



Steps:

- 1. PU FLEX 140 - Special, polyurethane adhesive.**
Used for the application of **ISOPOL 854** shock-pads or other prefabricated shock-absorbent rolls made from recycled rubber or EPDM.
- 2. ISOPOL 854 - Shock-pad in rolls.**
Elastic, prefabricated shock-pad made of recycled rubber providing shock-absorbency, in thickness of 10mm. Used as cushion substrate before the application of polyurethane or acrylic systems.
- 3. POLYSPORT STUCCO 1050 - PU pore filler.**
Applied by metal trowel.
- 4. POLYSPORT 1052 - UV-resistant, polyurethane, aliphatic, two-component top coating for outdoor sports floorings.**
Applied in two crossing layers, by airless spray or rollers.

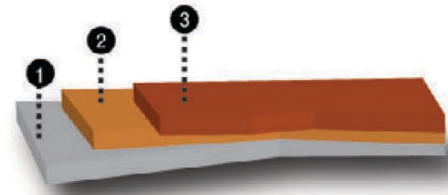

Description	Consumption
PU FLEX 140 - Special, polyurethane adhesive.	0.7-0.8kg/m ²
ISOPOL 854 - Shock-pad in rolls.	
POLYSPORT STUCCO 1050 - PU pore filler.	0.8kg/m ²
POLYSPORT 1052 - UV-resistant, polyurethane, aliphatic, two-component top coating for outdoor sports floorings.	0.25kg/m ²