

JOGGING TRACKS

POLTRACK JOGGING TRACK - SBR

Elastic, seamless, flexible colored flooring, ideal for jogging tracks.

It consists of a shock-pad base of **RECYCLED RUBBER 858** (granulometry 0.5-2mm) with **PU BINDER 1118**. Then follows a PU flexible pore filler coating **POLYSPORT STUCCO 1050** in 2 layers and a sealing PU, UV-resistant aliphatic top layer, **POLYSPORT 1052**, in two crossing layers.

The success in the application depends on the right preparation of the underlay and use of the material.



Steps:

1. PU PRIMER 870 - Polyurethane primer.

Applied by airless sprayer or brush.


2. Mixture of PU BINDER 1118 and RECYCLED RUBBER 858 (in granulometry of 0.5-2mm) applied by paving machine.

3. POLYSPORT STUCCO 1050 - Polyurethane, elastic, two-component pore filler.

Used for sealing porous prefabricated subfloor of sports floorings such as **ISOPOL 854** or wet-pour cushion shock-pads. Applied by flat trowel.

4. POLYSPORT 1052 - UV-resistant, polyurethane, two-component, top coating for outdoor sports floorings.

Applied, in two crossing layers by airless sprayer or a short haired mohair roller.

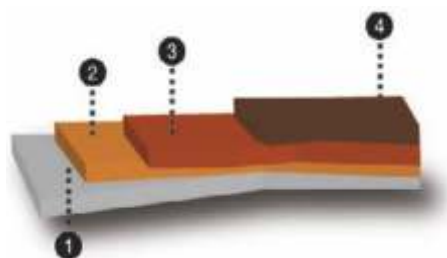

Description	Consumption
PU PRIMER 870 - Polyurethane primer.	0.2kg/m ² for 2 layers
BASE LAYER	
PU BINDER 1118 - Polyurethane binder.	1.6kg/m ² for 16mm mixture
RECYCLED RUBBER 858 in granulometry of 2-5mm or 3-5mm.	10.4kg/m ² for 16mm mixture
SEALING LAYER	
POLYSPORT STUCCO 1050 - Polyurethane, elastic, two-component pore filler.	1.5kg/m ² for 2 layers
TOP COATING	
POLYSPORT 1052 - UV-resistant, polyurethane, two-component, top coating for outdoor sports floorings.	0.25kg/m ² for 2 layers