

RUNNING TRACKS

POLTRACK FULL-PU


Synthetic outdoor system for running tracks in stadiums.

It is applied on fine asphalt or smooth, waterproof concrete, without rising humidity issues. After laying a PU primer for adhesion, follows the application of the first layer (base layer) which consists of laying the specially modified, FULL-PU colored polyurethane material **POLAPLAST P28** and broadcasting **RECYCLED RUBBER 858** 1-4mm on top (fresh-on-fresh), then a second layer comprising again the specially modified, FULL-PU colored polyurethane material **POLAPLAST P28** laid on the surface and **RECYCLED RUBBER 858** 1-4mm broadcast on top (fresh-on-fresh) and the third layer (surface layer) is the specially modified, full-PU colored polyurethane material **POLAPLAST P28** laid on the surface and **EPDM** granules 1-3mm broadcast on top to finish it off (fresh-on-fresh).



Steps:

1. **POLAPLAST P10 - Polyurethane primer.**
2. **Mixture of POLAPLAST P28, specially modified, colored full-PU material plus SBR granules.**
3. **Mixture of POLAPLAST P28, specially modified, colored full-PU material plus SBR granules.**
4. **Mixture of POLAPLAST P28, specially modified, colored full-PU material plus EPDM granules.**

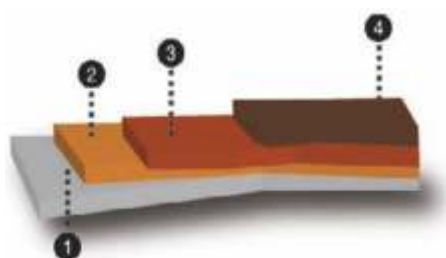

Description	Consumption
POLAPLAST P10 - Polyurethane primer.	0.2kg/m ²
BASE LAYER	
POLAPLAST P28 - Specially, modified, colored polyurethane full-PU material.	3kg/m ²
RECYCLED RUBBER 858 in granulometry of 1-4mm.	2.65kg/m ²
SECOND LAYER	
POLAPLAST P28 - Specially, modified, colored polyurethane full-PU material.	2.8kg/m ²
RECYCLED RUBBER 858 in granulometry of 1-4mm.	2.1kg/m ²
SURFACE LAYER	
POLAPLAST P28 - Specially modified, colored polyurethane full-PU surface layer.	2.75kg/m ²
EPDM 856 in granulometry of 1-3mm.	3.6kg/m ²