

JOGGING TRACKS

POLTRACK JOGGING TRACK - SHOCK-PAD - ISOPOL

Elastic, seamless, flexible colored flooring, ideal for jogging tracks.

It consists of a prefabricated shock-pad roll, a PU flexible pore filler coating, **POLYSPORT STUCCO 1050**, and of a sealing PU, UV-resistant aliphatic top layer, **POLYSPORT 1052**, in two crossing layers.

The success in the application depends on the right preparation of the underlay and use of the material.



Steps:

1. **PU FLEX - Special, polyurethane adhesive.**

Used for the application of **ISOPOL 854** shock-pads or other prefabricated shock-absorbent rolls made from recycled rubber or EPDM. Applied by V-notch trowel.

2. **ISOPOL 854 - Shock-pad in rolls.**


Elastic, prefabricated shock-pad made of recycled rubber providing shock-absorbency. Used as cushion substrate before the application of polyurethane or acrylic systems.

3. **POLYSPORT STUCCO 1050 - Polyurethane, elastic, two-component pore filler.**

Used for sealing porous prefabricated subfloor of sports floorings such as **ISOPOL 854** or wet-pour cushion shock-pads. Applied by flat trowel.

4. **POLYSPORT 1052 - UV-resistant, polyurethane, aliphatic, two-component top coating for outdoor sports floorings.**

Applied, in two crossing layers by airless sprayer or a short haired mohair roller.

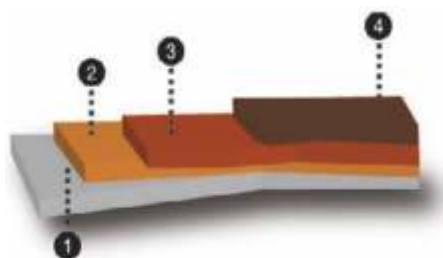

Description

PU FLEX 140 - Special, polyurethane adhesive.

Consumption

1kg/m²
for 1 layer

BASE LAYER

ISOPOL 854 - Shock-pads in rolls.

SEALING LAYER

POLYSPORT STUCCO 1050 - Polyurethane, elastic, two-component pore filler.

0.8kg/m²
for 2 layers

TOP COATING

POLYSPORT 1052 - UV-resistant, polyurethane, two-component, top coating for outdoor sports floorings.

0.25kg/m²
for 2 layers