

JOGGING TRACKS

POLTRACK JOGGING TRACK


Elastic, seamless, flexible coloured flooring, ideal for jogging tracks in total thickness of 18mm.

It consists of a shock-pad base of 2 layers. First layer is a mixture of **PU BINDER 1118** and **RECYCLED RUBBER 858-SBR** granules and the second layer is a flexible, colored mixture of **PU BINDER 1118** and **EPDM** granules. Follows the PU self-leveling coating, **POLYSPORT PU 1051** with **EPDM DUST** as a sealing layer and finally the PU, UV-resistant aliphatic top coating, **POLYSPORT 1052**, in two crossing layers.

Certified system by LABOSPORT Institute.

Steps:

- 1. PU PRIMER 870 - Polyurethane primer.**
Applied by airless sprayer or brush.
- 2. Mixture of PU BINDER 1118 and RECYCLED RUBBER 858** (in granulometry of 2-5mm or 3-5mm) applied by paving machine.
- 3. Mixture of PU BINDER 1118 and EPDM 856** (in granulometry of 0.5-1.5mm) applied by paving machine.
- 4. Mixture of POLYSPORT PU 1051 and EPDM dust** as a sealing layer for filling the porous of the prefabricated subfloor of sports flooring such as **ISOPOL 854** or wet-pour cushion shock-pads. Applied by flat trowel.
- 5. POLYSPORT 1052 - UV-resistant, polyurethane, two-component, top coating for outdoor sports flooring.**
Applied, in two crossing layers by airless sprayer or a short haired mohair roller.

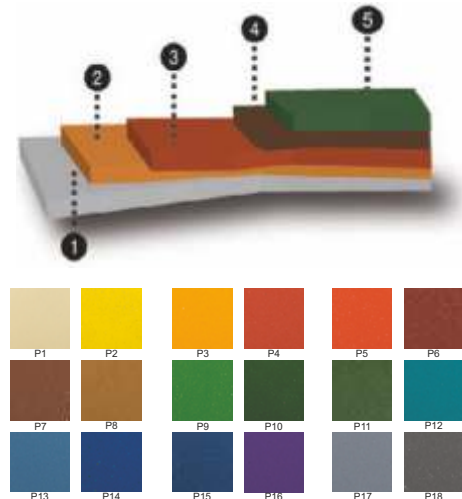

Description	Consumption
PU PRIMER 870 - Polyurethane primer.	0.2kg/m ² for 2 layers
BASE LAYER	
PU BINDER 1118 - Polyurethane binder.	1.2kg/m ² for 12mm mixture
RECYCLED RUBBER 858 in granulometry of 2-5mm or 3-5mm.	7.2kg/m ² for 12mm mixture
TOP LAYER	
PU BINDER 1118 - Polyurethane binder.	1kg/m ² for 5mm mixture
EPDM 856 in granulometry of 0.5-1.5mm.	5kg/m ² for 5mm mixture
SEALING LAYER	
POLYSPORT PU 1051 - Polyurethane, self-leveling, two-component coat for outdoor sports surfaces.	1.3kg/m ²
EPDM DUST.	0.2kg/m ²
TOP COATING	
POLYSPORT 1052 - UV-resistant, polyurethane, two-component, top coating for outdoor sports flooring.	0.3kg/m ² for 2 layers