

RAPIDFOAM PAD 868

PREFABRICATED SHOCK-PAD FOR PLAYGROUND FLOORING

GENERAL CHARACTERISTICS

RAPIDFOAM PAD 868 is the prefabricated cushion sub-base of the playground flooring **QUICKLAWN PLAYGROUND SYSTEMS** of **SAFEPOL** and **SANDPROOF**, in pad lawn and in different thickness with a final PU, smooth, non-porous finish or even **EPDM** or **TPV** finish. It's saves a lot of time during the application and minimizes the duration of the project time keeping also the project clean.

RAPIDFOAM's PAD 868 sealed surface transforms totally the meaning of playground flooring worldwide. It provides an excellent critical fall height results with long term performance and resistance. **RAPIDFOAM PAD 868** can be installed in combination with different surface's finishes as EPDM granules or EPDM granules plus polyurethane sealed system or European SBR granules plus polyurethane sealed system in 15mm.

Offers:

- **Uniform** critical fall height over the surface.
- Stable critical fall height **at high level** on long term bases.
- **Good dimensional stability.**
- **Extremely easy and fast to install.**

TECHNICAL DATA

HIC according to EN 1177
Critical fall height@ HIC = 1000 (in m)


Thickness	20mm	30mm	40mm	50mm	60mm	80mm
Critical Fall Height	0.6	1.0	1.2	1.7	2.1	2.7

KDF - Kataskeves Dapedon LTD
e : exports@kdf.gr w : www.kdf.gr

Showroom Office
1 Papanikolaou Ave, Pefka
57010, Thessaloniki, Greece
t / f : 0030 2310 829598

Accounting Office
19 Mitropoleos Str
54624, Thessaloniki, Greece



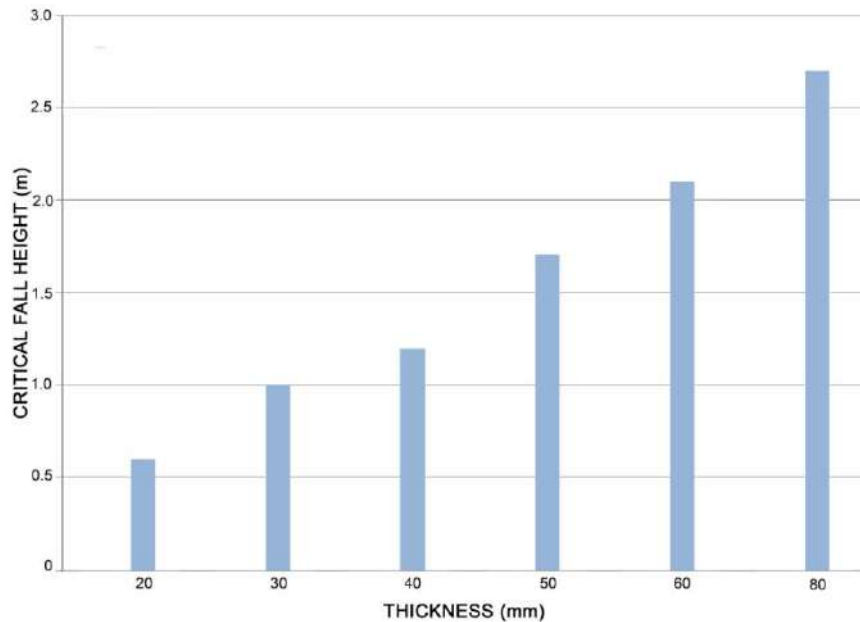

PREPARATION- APPLICATION

The sub-surface on which the material will be installed must be completely dry and clear of all foreign matter and free of dust, dirt, oil or any kind of spills.

- **PLAYGROUND FLOORING with KDF RAPIDFOAM PAD 868 AS SEALED, NON-POROUS SURFACES**

Combination of the prefabricated cushion sub-base **KDF RAPIDFOAM PAD 868** with a mixture of **SBR** or **EPDM** or **TPV granules** with PU Binder in thickness of 15mm and then a special PU pore sealer and PU, UV-resistance top coating.

- **PLAYGROUND FLOORING with KDF RAPIDFOAM PAD 868 AS OPEN-POROUS SYSTEM**

Combination of the prefabricated cushion sub-base **KDF RAPIDFOAM PAD 868** with a mixture of **EPDM granules** with PU Binder, on top, in thickness of 15mm.

The information given here is true, represents our best knowledge and is based not only on laboratory work, but also on field experience. However, because of numerous factors affecting results we offer this information without any guarantee and no patent liability is assumed. For additional information or questions, contact the technical department of KDF LTD.

KDF - Kataskeves Dapedon LTD
e : exports@kdf.gr w : www.kdf.gr

Showroom Office
1 Papanikolaou Ave, Pefka
57010, Thessaloniki, Greece
t / f : 0030 2310 829598

Accounting Office
19 Mitropoleos Str
54624, Thessaloniki, Greece



KDF

Sports Flooring Systems & Building Materials

50 YEARS OF EXPERIENCE

CONSUMPTION

200-300 gr/m² depending on the type and the absorbency of the underlay.

APPLICATION TOOLS

Brush and airless sprayer. Tools should be cleaned with a PU solvent immediately after use.

PACKAGING

Drums / Barrels.

STORAGE

One year in unopened containers in cool and dry places, out of sunlight, with minimum temperature 5°C and maximum temperature 30°C.

REMARKS

- Working time of **POLYURETHANE PRIMER 870** decreases when ambient temperature rises.
- Prolonged storage of partially used containers containing **POLYURETHANE PRIMER 870** must be avoided as contact with atmospheric moisture will result in skinning and clouding of the product.

CAUTION

The application must take place in well-aired places using protective gloves. Skin or eye contact must be avoided, otherwise wash carefully with soap and water.

For more information consult the safety data sheet.

The information given here is true, represents our best knowledge and is based not only on laboratory work, but also on field experience. However, because of numerous factors affecting results we offer this information without any guarantee and no patent liability is assumed. For additional information or questions, contact the technical department of KDF LTD.

KDF - Kataskeves Dapedon LTD
e : exports@kdf.gr w : www.kdf.gr

Showroom Office
1 Papanikolaou Ave, Pefka
57010, Thessaloniki, Greece
t / f : 0030 2310 829598

Accounting Office
19 Mitropoleos Str
54624, Thessaloniki, Greece



PU BINDER 1178

SPECIAL POLYURETHANE BINDER

GENERAL CHARACTERISTICS

100% solids, aromatic polyisocyanate-prepolymer moisture-curing binder based on diphenylmethane diisocyanate. It is MDI based and solvent free. It exhibits excellent adhesion to all rubber granules and gives a strong performance both in terms of tensile strength and durability.

It is mixed with **RECYCLED RUBBER 858, SBR granules**, for the creation of the innovative, elastic, safety playground flooring **SAFEPOL SANDPROOF SYSTEM** or other flexible rubber floorings, ideal for playgrounds, schools etc.

PU BINDER 1178 cured with the air humidity, has low viscosity and is solvent free. **PU BINDER 1178** combines and bonds SBR or EPDM rubber granules, RIM components, polyurethane granules and sponge particles. Also it can be used as lining for insulation and for pasting.

TECHNICAL DATA

Density (25°C)	1,09±0.1 gr/cm ³
Viscosity (25°C)	8000±mPas
Color	Clear, pale yellow

SUBSTRATE REQUIREMENTS

Concrete quality:	at least C20/25
Age:	at least 30 days
Moisture content:	below 4%

PREPARATION-APPLICATION

On-site applications: Applied on dry surfaces, free of materials that might prevent bonding e.g. dust, loose particles etc (in case of asphalt or concrete). The success in the application depends on the right preparation of the underlay and use of the material.

- **Good, dry** cleaning of the surface from dust and residues.
- Priming of the surface with the special **POLYURETHANE PRIMER 870** in two layers. Consumption: 250-400 gr/m², depending on the absorption of the underlay. It is recommended that the second layer should be applied in sections each time, right before the application of **PU BINDER 1178** and **SBR granules** in order to ensure proper adhesion.
- Good mixing of the **PU BINDER 1178** and the **RECYCLED RUBBER 858 in granulometry of 2-4mm or 2-5mm**. Mixing should be performed using a low revolution mixer (300-600 rpm) for 1-2 min. Stirring of the mixture should be performed thoroughly near the sides and bottom

of the container in order to achieve homogeneity.

- Following, the mixture is poured on the surface and spread on the desired thickness using paving machine or it can be done manually if the applicator is experienced, with rake for spreading, (wooden) straightedge for initial smoothing, flat metal trowel for final smoothing and compacting, cylinder weighing 8-15kg for final compacting-(cylinder should be cleaned repeatedly with diesel to remove stuck granules from its surface). Consumption: 7kg/m²/cm.
- Good mixing of the **PU BINDER 1178** and the **RECYCLED RUBBER 858 in granulometry of 0.5-2mm**. Mixing should be performed using a low revolution mixer (300-600 rpm) for 1-2 min. Stirring of the mixture should be performed thoroughly near the sides and bottom of the container in order to achieve homogeneity.
- Following, the mixture is poured on the surface and spread on the desired thickness using paving machine or it can be done manually if the applicator is experienced, with rake for spreading, (wooden) straightedge for initial smoothing, flat metal trowel for final smoothing and compacting, cylinder weighing 8-15kg for final compacting-(cylinder should be cleaned repeatedly with diesel to remove stuck granules from its surface). Consumption: 7,2kg/m²/cm.
- Follows the application of **KDF-PU 1055** a special waterproof and sandproof, polyurethane pore filler.
- And finally a top coat is applied, **KDF-PU 1056**, polyurethane, modified, UV-resistant, aliphatic, elastic, glossy, two-component top coating.

PACKAGING

220kg in barrels.

STORAGE

One year in unopened containers in dry places with minimum temperature 5°C and maximum temperature 30°C, protected from moisture and heat.

REMARKS

The floor must be smooth, dry and clean. Must be removed from oil, dirt, rust and burr. Do not add any foreign material. Concrete humidity should not be above 4%, ambient humidity should be at least 40% and most 80%. To begin the application, must wait for the appropriate humidity

Working time of **PU BINDER 1178** decreases when ambient temperature rises.

Prolonged storage of partially used containers containing **PU BINDER 1178** must be avoided as contact with atmospheric moisture will result in skinning and clouding of the product.

CAUTION

The application must take place in well-aired places using protective gloves. Skin or eye contact must be avoided, otherwise wash carefully with soap and water.

For more information consult the material safety data sheet.

The information given here is true, represents our best knowledge and is based not only on laboratory work, but also on field experience. However, because of numerous factors affecting results we offer this information without any guarantee and no patent liability is assumed. For additional information or questions, contact the technical department of KDF LTD.

KDF - Kataskeves Dapedon LTD
e : exports@kdf.gr w : www.kdf.gr



Showroom Office
1 Papanikolaou Ave, Pefka
57010, Thessaloniki, Greece
t / f : 0030 2310 829598
Accounting Office
19 Mitropoleos Str
54624, Thessaloniki, Greece

EPDM 856

RUBBER GRANULES

GENERAL CHARACTERISTICS

Type of material: Rubber EPDM

Grain size: 0.8-2.5mm,1.0-3mm,1.0-4mm or others

PERFORMANCE OF SAMPLE 25%

Test item	Performance
Tensile strength (Mpa)	>4.3
Elongation at break (%)	>735
Hardness (shore A)	60-65
Specific gravity (kg/cm ³)	1.45 ± 0.05

PREPARATION-APPLICATION

EPDM 856 granules are basically used for wet pour colored playground floorings (granulometry 1-3mm), for flexible multipurpose outdoor courts in 10-20 mm, SYSTEM COLORFLEX, and in applications of running track system such as POLTRACK SANDWICH SYSTEM (granulometry 1-3mm) and POLTRACK SPRAYCOAT SYSTEM (granulometry 0.5-1.5 mm).

Can be used also as infill of artificial synthetic turf or in the production of epdm rubber tiles or even loose lay and around swimming pools as a flexible flooring.

REMARKS

- It is highly suggested (especially in hot climates like in Middle East countries) the usage of the UV-resistance top coat **POLYSPORT XP 1069**, which gives a strong UV protection and doesn't allow the change of color to occur. **POLYSPORT XP 1069** is produced in all EPDM colour range and needs to be applied with 0,4 kg/m² in two crossing layers by airless sprayer or rollers.
- In case that there is no usage of UV-resistance polyurethane aliphatic coating strong shades like blue, rose, orange, grey etc will alter.

KDF

Sports Flooring Systems & Building Materials
50 YEARS OF EXPERIENCE

- All technical data are correct to the best of our knowledge and are intended to help our customers.
 - They do not constitute a guarantee of qualities and provide on bases for legal liability.
 - We advise our customers to choose the PU-binder according to the type and color of the EPDM rubber granules.
-

The information given here is true, represents our best knowledge and is based not only on laboratory work, but also on field experience. However, because of numerous factors affecting results we offer this information without any guarantee and no patent liability is assumed. For additional information or questions, contact the technical department of KDF LTD.

KDF - Kataskeves Dapedon LTD
e : exports@kdf.gr w : www.kdf.gr

Showroom Office
1 Papanikolaou Ave, Pefka
57010, Thessaloniki, Greece
t / f : 0030 2310 829598

Accounting Office
19 Mitropoleos Str
54624, Thessaloniki, Greece



PACKAGING

Barrels 280kg

STORAGE

One year in unopened containers in cool and dry places, out of sunlight, with minimum temperature 5°C and maximum temperature 30°C.

REMARKS

Substrate must be dry, clean, and free from dust, grease and oil. Application must be done between 10°C - 40°C.

KDF-PU 1055 PORE FILLER has to be thoroughly sanded before the application of the top aliphatic coat **KDF-PU 1056 TOP COATING** in order to provide a smooth clean surface for the aliphatic top coat that will follow right after the sanding process is completed.

By no means **KDF-PU 1055 PORE FILLER** should be applied in thickness. The material is a pore filler and not a levelling material, and so it should be applied as pore filler (thin dragged layer over the substrate). In case it is applied in some areas in thickness, those areas should be well ground with sanding machine before subsequent layers in order to avoid cracking of the material due to oversized thickness.

Attention should be given also to possible trapped humidity in the pore filler, which could lead to cracks in the material or bubbles of the material.

Moreover, it is important that the mixing ratio between PU BINDER to SBR or EPDM rubber in the underlying cushion mixtures is kept as stable as possible in order to obtain similar flexibility of the cushion throughout the surface. Otherwise, areas with different flexibilities might occur. Same can happen if the mixing is not properly done in the paving machine or in the barrels/drums to secure uniformity throughout.

CAUTION

Harmful if swallowed. Seek immediately medical attention. Rubber gloves and safety glasses with side guards should be worn.

For more information consult the material safety data sheet.

The information given here is true, represents our best knowledge and is based not only on laboratory work, but also on field experience. However, because of numerous factors affecting results we offer this information without any guarantee and no patent liability is assumed. For additional information or questions, contact the technical department of KDF LTD.

REMARKS

- Working time of **KDF-PU 1056 TOP COATING** decreases when ambient temperature rises.
- Prolonged storage of partially used containers containing **KDF-PU 1056 TOP COATING** must be avoided as contact with atmospheric moisture will result in skinning and clouding of the product.
- After hardening **KDF-PU 1056 TOP COATING** is completely safe for health.
- The three layers of **KDF-PU 1056 TOP COATING** will have to be applied strictly within 24 hours of one another (European conditions) **or within 3-6 hours (GCC high-temperature conditions)** in order to cover the surface swiftly and protect it from unwanted weather or other adverse conditions (sand dust, accumulated dirt or foreign matter etc.). In case the 24-hour limit (Europe) or the 3-6-hour limit (GCC) is surpassed or weather or other adverse conditions interfere between layers at any time, the surface might need sanding again to restore smoothness and cleanliness before applying subsequent layers of the aliphatic top coat.

CAUTION

The application must take place in well-aired places using protective gloves. Skin or eye contact must be avoided, otherwise wash carefully with soap and water.

For more information consult the material safety data sheet.

The information given here is true, represents our best knowledge and is based not only on laboratory work, but also on field experience. However, because of numerous factors affecting results we offer this information without any guarantee and no patent liability is assumed. For additional information or questions, contact the technical department of KDF LTD.