




CERTIFIED EXPERTISE - IN MORE THAN 80 COUNTRIES
OVER 50 INTERNATIONAL CERTIFICATES

SPORTS FLOORING

KDF
Sports Flooring Systems & Building Materials
50 YEARS OF EXPERIENCE



PROJECTS

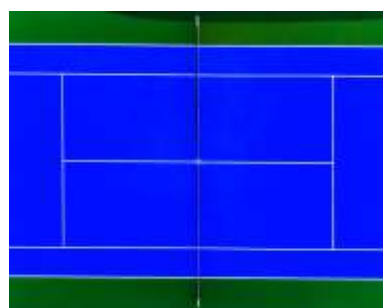

PROJECTS





BRAZIL
Running Track



CHINA
Outdoor Sports Flooring



U.A.E
Bicycle track Track



K.S.A
Jogging Track

CONTENTS

01. Company profile
02. Recommended sub-floor for Rubber & Liquid Sports Flooring
03. Sustainability that performs

OUTDOOR SPORTS FLOORING

04. Sportfloor-Ex Fast system
05. Sportfloor-Ex system
06. Flexfloor-Ex in 3.5mm system
07. Flexfloor-Ex in 6mm system
08. Sportique-Ex system
09. Wet-pour Polyflex Ael-Ex system
10. Polyflex Ael-Ex system
11. Wet-pour Polyflex PU-Ex system
12. Polyflex PU-Ex system
13. Colorflex system

CYCLING TRACKS

14. Sportground-Ex system
15. Decoquartz system

RUNNING TRACKS

16. Poltrack Spraycoat system
17. Poltrack Sealed Spraycoat system
18. Poltrack Sandwich system
19. Poltrack Roll-Sandwich system
20. Poltrack Full-PU system
21. Poltrack Full-PU EPDM system
22. Poltrack Spraycoat Acrylic system

JOGGING TRACKS

23. Poltrack Jogging Track system
24. Poltrack PU Jogging Track system

INDOOR SPORTS FLOORING

25. Polyflex PU-In system
26. Wet-pour Polyflex PU-In system
27. Polyflex Ael-In system
28. Wet-pour Polyflex Ael-In system

PLAYGROUND FLOORING

29. Safepol Multicolor system
30. Safepol Multicolor with TPV granules system
31. Safepol SBR Colourant system



CHILE

Indoor Sports Flooring

UAE

Splash park Flooring

SPAIN

Playground Flooring

ITALY

Outdoor Sports Flooring

32. Safepol Sandproof system

33. Quicklawn Safepol system

SPLASH PARKS

34. Aquasoft-Ex system

35. Aquasoft-Ex Wet-Pour system

SPECIALIZED FLOORING SYSTEMS

36. Polysafe Wall system

37. Ballistix Floor system

38. KDF Natura Floor system

POOL PAINTS AND DECORATIVE COATINGS

39. Decopool Floor system

40. Decopool PU 1807

RENOVATION SYSTEMS

41. Sportfloor-Ex Fix system

42. Polyflex-PU Refresh system

PROTECTIVE TOP COATINGS

43. Polysport 1052 - Polysport PR 1065 - Polysport XP 1069

REPAIRING MATERIALS FOR SPORTS SURFACES

44. Crackfix 500 - Floorfix 600

SHOCK-ABSORBENT SUBFLOOR

45. Isopol 854 - Isopol SBR-EPDM 855 - Isopol EPDM 856

EQUINE FLOORING

46. Poltrack Equine System

ARTIFICIAL GRASS

47. For Football fields

48. For Football fields - For Tennis/Padel courts

49. For Decorative-Leisure areas

POLYURETHANE GLUES AND TAPES

50. Polyurethane glues for grass, prefabricated rolls, safety tiles, linoleum, carpet

51. Polyurethane glues for universal use, parquet - Seaming Tapes

CERTIFICATES

INDICATIVE REFERENCE LIST OF PROJECTS

INTRODUCTION

KDF LTD (www.kdf.gr) is one of the most dynamic and export-oriented Greek companies (currently active in more than 80 countries in six continents), based in Greece (EU) with production facilities and warehouses for acrylic and polyurethane materials and EPDM granules.

We are experts in sports, industrial and decorative flooring products and systems, with huge experience in Europe (Spain, France, Austria, Portugal, Croatia, Malta, Ukraine, etc.), Africa (Egypt, Tunisia, Algeria, Morocco, Libya), Asia (China, Thailand, Malaysia, Singapore, Vietnam), Middle East (U.A.E, K.S.A, Oman, Qatar, Bahrain, Kuwait), India and Pakistan as well. Our presence is active in Latin America too with projects in Colombia, Peru, Chile, and Brazil and also in Mexico.

Our export horizon is expanding rapidly and our goal is to stand out as a model of flexibility and competitiveness. **KDF** being one of the pioneer companies in the sector of sports flooring systems and building materials and giving particular attention to providing a fully upgraded range of products and services, provides certified systems by I.T.F, WORLD ATHLETICS, EU norms, L.N.E, LABOSPORT, ISASPORT, to name but a few.

KDF goes far beyond trade, providing consultancy in marketing and also technical support all the way, from the costing till the finalization of the project. Operating under the requirements of ISO 9001/2015 for production, trade and also application, we make sure our products are first applied successfully at site by our own people before we launch them abroad.

Therefore, our systems have all stood the real life test in different climates, from North Europe till Middle East and Latin America, and this is one of our main assets, enabling us to provide full and vertical technical support from specifying to final application plus supervision when required or even full application and costing.

We invite you to discover a world of sports flooring expertise and solutions.



RECOMMENDED SUBFLOOR FOR RUBBER AND LIQUID SPORTS FLOORING

Asphalt is the safest subfloor for sports flooring and must be always preferred than concrete surfaces.

A. Asphalt Substrate

The asphalt must have a slope of 0.7-1% and must dry for at least 30 days so that all solvents from the asphalt can evaporate.

The asphalt sub-floor should be applied on well compacted 150mm road base sub-floor and asphalt should be laid in one layer (and not 2) in 6 to 8cm with fine and coarse aggregates (up to 15mm granulometry) like the kind of asphalt used in road construction.

So, new road-grade asphalt will have to be laid (minimum 60mm) in one layer containing coarse aggregates and then mature for 30 days at least, before any application takes place on top of the asphalt to avoid bubbles on the final layer of the sport or rubber flooring.

B. Concrete Surface

Concrete surface must be power-trowelled without cracks and must be smooth with a slope of 0.7-1% and humidity under 4% in 10cm depth of concrete.

Concrete must also be dry at least for 40 days and then the application takes place if there is no rising humidity of the sub-floor. Before the application takes place, there must be **proper grinding** of the surface by a grinding machine to open the pores accordingly and also a **measurement by special instrument to measure humidity on the surface and in 10cm under the surface.**

Generally concrete is a risky sub-floor and there may be problems with rising humidity, especially in areas where the sea level is really high and when the sea is close or in areas near greenery.

Always create expansion joints in large areas of concrete, in order to avoid uncontrollable cracks and failures. Joints should be every 25 square meters creating a grid of 5x5 meters or close to that.



Sustainability that performs.

Sustainability is at the core of our production philosophy. Our sports flooring systems are made from biobased materials with up to **98% USDA-certified** content, ensuring minimal environmental impact without compromising performance. We use **PAH-free**, heavy metal-free formulations and fully comply with **EU REACH** (Phthalates Entry 51 & 52). Our environmental commitment is further supported by certifications such as **ISO 14001:2015**, **ISO 50001:2018**, **ISO 16000**, **EN 71-3**, **ECOLABEL**, **GREENGUARD**, and **DIN 18035**, reflecting rigorous standards for sustainability, safety, and indoor air quality.



OUTDOOR SPORTS FLOORING

SPORTFLOOR-EX FAST

Outdoor resilient acrylic sports flooring system ideal for tennis, basketball, volleyball, handball, football courts, as well as any other outdoor sports court.

Combination of wet-pour acrylic coatings in total average thickness of 1.2mm.

Classified system by the International Tennis Federation (I.T.F) - Class 5.

Steps:

1. RITIVEX R LIQUID 1102 - Acrylic primer.



Used as primer of acrylic coatings, such as **ELASTOSPORT 853**, **ELASTOTURF 851** and **CORRIDOL 864**. Applied by airless sprayer or brush.

2. ELASTOSPORT 853-COLORED - Acrylic, colored, one component, smoothing and repairing wet-pour resurfacer for sports flooring systems.

Consists of acrylic resins, quartz sand and special improver. It is applied by squeegee on smooth, compact road-grade asphalt, seals the porosity of the asphalt and in parallel smooths out the surface. Highly resistant to adverse weather conditions (snow, frost, heat waves etc.) after drying.

3. ELASTOTURF TOP - Acrylic, special top coating for sports flooring systems.

One component, acrylic resin with easy application, which provides a safe and high quality game. Applied by squeegee and short-haired mohair roller.

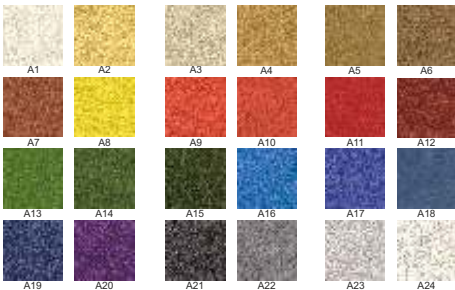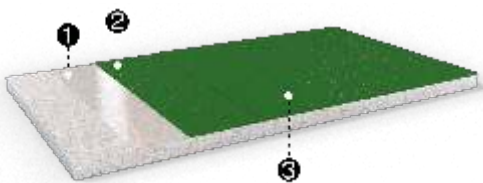

Description	Consumption
RITIVEX R LIQUID 1102 - Acrylic primer.	0.2-0.3kg/m ² for 1 layer
ELASTOSPORT 853 COLORED - Acrylic, colored, one component, smoothing and repairing wet-pour resurfacer for sports flooring systems.	2kg/m ² for 2 layers
ELASTOTURF TOP - Acrylic, special top coating for sports flooring systems.	0.3-0.35kg/m ² for 1 layer

OUTDOOR SPORTS FLOORING

SPORTFLOOR-EX HARD COURT

Outdoor resilient, acrylic medium-hard sports flooring system ideal for tennis, basketball, volleyball, handball, football courts, as well as any other outdoor sports court.

Combination of wet-pour acrylic coatings in total average thickness of 2.2mm.

Classified system by the International Tennis Federation (I.T.F) - Class 4.



Steps:

1. RITIVEX R LIQUID 1102 - Acrylic primer.



Used as primer of acrylic coatings, such as **ELASTOSPORT 853**, **ELASTOTURF 851** and **CORRIDOL 864**. Applied by airless sprayer or brush.

2. ELASTOSPORT 853 - Acrylic, one component, smoothing and repairing wet-pour resurfacer for sports flooring systems.

Consists of acrylic resins, quartz sand and special improver. It is applied by squeegee on smooth compact asphalt to seal the porosity and smooth out the surface before the application of **ELASTOTURF 851**. Highly resistant to adverse weather conditions(snow, frost, heat waves etc.) after drying.

3. ELASTOTURF 851 - Acrylic, elastic, slip-resistant, coating for sports flooring systems.

Consists of acrylic resins, quartz sand and special improver. It is combined with **ELASTOSPORT 853** as substrate to create multi-purpose sports flooring systems. Highly resistant to adverse weather conditions(snow, frost, heat waves etc.) after drying. Applied by squeegee.

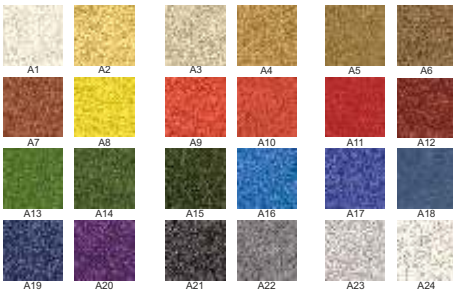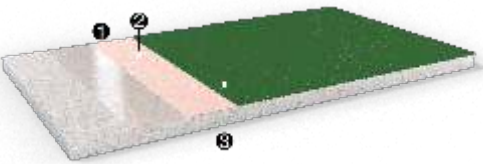

Description	Consumption
RITIVEX R LIQUID 1102 - Acrylic primer.	0.2-0.3kg/m ² for 1 layer
ELASTOSPORT 853 - Acrylic, one component, smoothing and repairing wet-pour resurfacer for sports flooring systems.	2kg/m ² for 2 layers
ELASTOTURF 851 - Acrylic, elastic, slip-resistant, coating for sports flooring systems.	1.5kg/m ² for 3 layers

OUTDOOR SPORTS FLOORING

FLEXFLOOR-EX in 3.5mm

Outdoor, cushion, flexible, acrylic sports flooring system ideal for tennis, basketball, volleyball, handball and football courts, as well as any other outdoor sports court.

Combination of wet-pour acrylic coatings in total average thickness of 3.5mm.

Classified system by the International Tennis Federation (I.T.F) - Class 3.

Steps:

1. RITIVEX R LIQUID 1102 - Acrylic primer.

Used as primer of acrylic coatings, such as **ELASTOSPORT 853**, **ELASTOTURF 851** and **CORRIDOL 864**. Applied by airless sprayer or brush.

2. ELASTOSPORT 853 - Acrylic, one component, smoothing and repairing wet-pour resurfacer for sports flooring systems.



Consists of acrylic resins, quartz sand and special improver. It is applied by squeegee on dry compact asphalt to seal the porosity and smooth out the surface before the application of **SUPER ELASTOCOAT 842**. Highly resistant to adverse weather conditions (snow, frost, heat waves etc.) after drying.

3. SUPER ELASTOCOAT COARSE 842 - Highly flexible, pasty, wet-pour cushion rubber flooring for sports flooring systems.

Consists of recycled rubber, acrylic resins and special improver, with SBR granules in granulometry of 0.5-1.0mm. Applied by squeegee in 2 crossing layers on dry compact smooth asphalt or waterproof concrete substrates or on **ELASTOSPORT 853**.

4. SUPER ELASTOCOAT FINE 842 - Highly flexible, pasty, wet-pour cushion rubber flooring for sports flooring systems.

Consists of recycled rubber, acrylic resins and special improver, with SBR powder in granulometry of 0.2-0.5mm. Applied by squeegee in 2 crossing layers, on dry compact smooth asphalt or waterproof concrete substrates or on **ELASTOSPORT 853**.

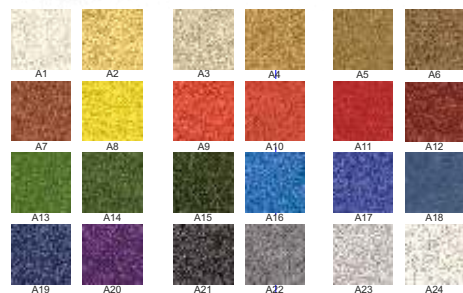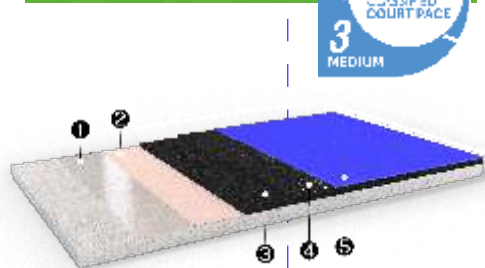

5. ELASTOTURF 851 - Acrylic, elastic, slip-resistant, coating for sports flooring systems.

Consists of acrylic resins, quartz sand and special improver. Highly resistant to adverse weather conditions (snow, frost, heat waves etc.) after drying. Applied by squeegee.

Description	Consumption
RITIVEX R LIQUID 1102 - Acrylic primer.	0.2-0.3kg/m ² for 1 layer
ELASTOSPORT 853 - Acrylic, one component, smoothing and repairing wet-pour resurfacer for sports flooring systems.	1.3kg/m ² for 1 layer
SUPER ELASTOCOAT COARSE 842 - Highly flexible, pasty, wet-pour cushion sub-layer for sports flooring systems.	1.2kg/m ² for 2 layers
SUPER ELASTOCOAT FINE 842 - Highly flexible, pasty, wet-pour cushion sub-layer for sports flooring systems.	0.8kg/m ² for 2 layers
ELASTOTURF 851 - Acrylic, elastic, slip-resistant, coating for sports floor systems.	1.8kg/m ² for 3 layers

OUTDOOR SPORTS FLOORING

FLEXFLOOR-EX in 6mm

Outdoor flexible, acrylic sports flooring system ideal for tennis, basketball, volleyball, handball and football courts, as well as any other outdoor sports court.

Combination of wet-pour acrylic coatings in total average thickness of 6mm.

Steps:

1. RITIVEX R LIQUID 1102 - Acrylic primer.

Used as primer of acrylic coatings, such as **ELASTOSPORT 853**, **ELASTOTURF 851** and **CORRIDOL 864**. Applied by airless sprayer or brush.

2. ELASTOSPORT 853 - Acrylic, one component, smoothing and repairing wet-pour resurfacer for sports flooring systems.



Consists of acrylic resins, quartz sand and special improver. It is applied by squeegee on dry compact asphalt to seal the porosity and smooth out the surface before the application of **SUPER ELASTOCOAT 842**. Highly resistant to adverse weather conditions (snow, frost, heat waves etc.) after drying.

3. SUPER ELASTOCOAT COARSE 842 - Highly flexible, pasty, wet-pour cushion rubber flooring for sports flooring systems.

Consists of recycled rubber, acrylic resins and special improver, with SBR granules in granulometry of 0.5-1mm. Applied by squeegee in 5 crossing layers on dry compact smooth asphalt or waterproof concrete substrates or on **ELASTOSPORT 853**.

4. SUPER ELASTOCOAT FINE 842 - Highly flexible, pasty, wet-pour cushion rubber flooring for sports flooring systems.

Consists of recycled rubber, acrylic resins and special improver, with SBR powder in granulometry of 0.2-0.5mm. Applied by squeegee in 2 crossing layers on dry compact smooth asphalt or waterproof concrete substrates or on **ELASTOSPORT 853**.

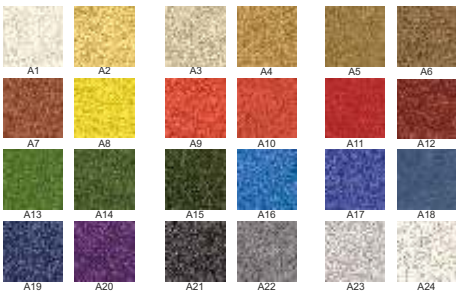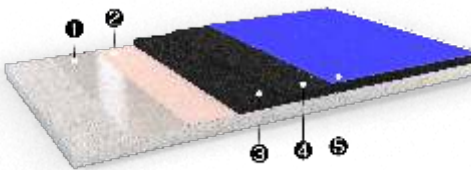

5. ELASTOTURF 851 - Acrylic, elastic, slip-resistant, coating for sports flooring systems.

Consists of acrylic resins, quartz sand and special improver. Highly resistant to adverse weather conditions (snow, frost, heat waves etc.) after drying. Applied by squeegee.

Description	Consumption
RITIVEX R LIQUID 1102 - Acrylic primer.	0.2-0.3kg/m ² for 1 layer
ELASTOSPORT 853 - Acrylic, one component, smoothing and repairing wet-pour resurfacer for sports flooring systems.	1.3kg/m ² for 1 layer
SUPER ELASTOCOAT COARSE 842 - Highly flexible, pasty, wet-pour cushion sub-layer for sports flooring systems.	3.4kg/m ² for 5 layers
SUPER ELASTOCOAT FINE 842 - Highly flexible, pasty, wet-pour cushion sub-layer for sports flooring systems.	0.8kg/m ² for 2 layers
ELASTOTURF 851 - Acrylic, elastic, slip-resistant, coating for sports floor systems.	1.8kg/m ² for 3 layers

OUTDOOR SPORTS FLOORING

SPORTIQUE-EX

Outdoor cushion, flexible acrylic sports flooring system, featuring a uniform colour from the first to the final layer, ensuring consistent appearance and performance throughout its full thickness.

Ideal for tennis, basketball, volleyball, handball, and football courts, as well as any other outdoor sports facility.

It consists of a combination of wet-pour, same-colour acrylic coatings applied in multiple layers.

Classified system by the International Tennis Federation (I.T.F)

Steps:

1. RITIVEX R LIQUID 1102 - Acrylic primer.

Used as primer of acrylic coatings, such as **ELASTOSPORT 853**, **ELASTOTURF 851** or **ELASTOMARK 818**. Applied by roller, squeegee, airless sprayer or brush.

2. ELASTOSPORT 853-COLORED - Acrylic, colored, one component, smoothing and repairing wet-pour resurfacer for sports flooring systems.


Consists of acrylic resins, quartz sand and special improver. It is applied by squeegee on smooth, compact road-grade asphalt, seals the porosity of the asphalt and in parallel smooths out the surface. Highly resistant to adverse weather conditions (snow, frost, heat waves etc.) after drying.

3. SUPER ELASTOCOAT EPDM COARSE 842 - Highly flexible, pasty, wet-pour cushion rubber flooring for sports flooring systems.

Consists of EPDM granules in granulometry of 0.5-1.0mm, acrylic resins and special improver. Applied by squeegee in 2 crossing layers on dry compact smooth asphalt or waterproof concrete substrates or on **ELASTOSPORT 853-COLORED**.

4. SUPER ELASTOCOAT EPDM FINE 842 - Highly flexible, pasty, wet-pour cushion rubber flooring for sports flooring systems.

Consists of EPDM granules in granulometry of 0.2-0.5mm, acrylic resins and special improver. Applied by squeegee in 2 crossing layers on dry compact smooth asphalt or waterproof concrete substrates or on **ELASTOSPORT 853-COLORED**.

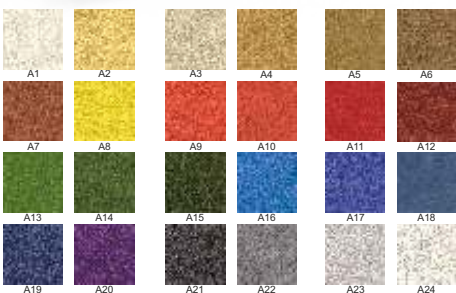

5. ELASTOTURF 851 - Acrylic, elastic, slip-resistant, coating for sports flooring systems.

Consists of acrylic resins, quartz sand and special improver. Highly resistant to adverse weather conditions (snow, frost, heat waves etc.) after drying. Applied by squeegee.

Description	Consumption
RITIVEX R LIQUID 1102 - Acrylic primer.	0.2-0.3kg/m ² for 1 layer
ELASTOSPORT 853 COLORED - Acrylic, colored one component, smoothing and repairing wet-pour resurfacer for sports flooring systems.	1.3kg/m ² for 1 layer
SUPER ELASTOCOAT FX COARSE 842 - Highly flexible, pasty, wet-pour cushion sub-layer for sports flooring systems.	1.35kg/m ² for 2 layers
SUPER ELASTOCOAT FX FINE 842 - Highly flexible, pasty, wet-pour cushion sub-layer for sports flooring systems.	0.9kg/m ² for 2 layers
ELASTOTURF 851 - Acrylic, elastic, slip-resistant, coating for sports floor systems.	1.8kg/m ² for 3 layers

OUTDOOR SPORTS FLOORING

WET-POUR POLYFLEX AEL-EX

Outdoor highly flexible, acrylic system, ideal for tennis, basketball, volleyball, handball, football, multipurpose courts, as well as any other outdoor sports court.

Combination of a mixture of **PU BINDER 1118** plus **RECYCLED RUBBER 858**, in granulometry of 0.5-2mm, and acrylic coatings in total thickness of 8mm up to 14mm.



Steps:

1. PU PRIMER 870 - Special, polyurethane primer.


Applied by airless sprayer or brush on asphalt surfaces or on waterproof concrete surfaces, without rising humidity issues.

2. Mixture of PU BINDER 1118 and RECYCLED RUBBER 858 (minimum 6mm) - Elastic, shock-absorbent, wet-pour system.

The **RECYCLED RUBBER 858** is in granulometry of 0.5-2mm. The mixture is applied by paving machine in thickness of 6mm to 12mm or more.

3. ELASTOTURF 851 - Acrylic, elastic, slip-resistant coating for sports flooring systems.

Consists of acrylic resins, quartz sand and special improver. Creates multi-purpose sports flooring systems. Highly resistant to adverse weather conditions (snow, frost, heat waves etc.) after drying. Applied by squeegee in 2 layers at least.

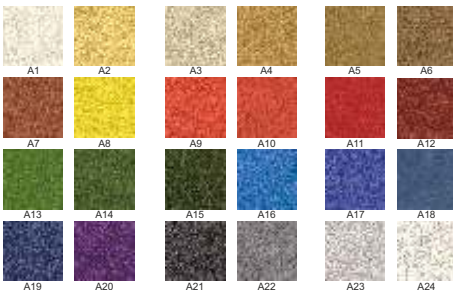

Description	Consumption
PU PRIMER 870 - Special, polyurethane, prime.	0.2-0.3kg/m ² for 2 layers
PU BINDER 1118 - Polyurethane binder.	1.32kg/m ² for 10mm mixture
RECYCLED RUBBER 858 - SBR granules in granulometry of 0.5-2mm.	6kg/m ² for 10mm mixture
ELASTOTURF 851 - Acrylic, elastic, slip-resistant, coating for sports flooring systems.	3.5-3.8kg/m ² for 3 layers

OUTDOOR SPORTS FLOORING

POLYFLEX AEL-EX

Outdoor highly flexible, acrylic system, ideal for tennis, basketball, volleyball, handball, football, multipurpose courts, as well as any other outdoor sports court.

Combination of prefabricated shock-pads and acrylic coatings in average total thickness of 6mm up to 14mm.

Classified system by the International Tennis Federation (I.T.F) - Class 2.



Steps:

1. PU FLEX 140 - Special, polyurethane, two-component adhesive.


It is applied with a V-notch trowel, on dry waterproof surfaces of concrete, without rising humidity issues, or smooth, asphalt surfaces. Used for the application of **ISOPOL 854** shock-pad in rolls or other prefabricated shock-absorbent rolls made from recycled rubber or EPDM granules.

2. ISOPOL 854 - Shock-pad in rolls.

Elastic, prefabricated shock-pad made of recycled rubber granules providing shock-absorbency, in thickness of 4mm up to 12mm. Used as cushion substrate before the application of polyurethane or acrylic systems.

3. ELASTOTURF 851 - Acrylic, elastic, slip-resistant, coating for sports flooring systems.

Consists of acrylic resins, quartz sand and special improver. It is combined with **ISOPOL 854** as substrate to create multipurpose sports flooring systems. Highly resistant to adverse weather conditions (snow, frost, heat waves etc.) after drying. Applied by squeegee in 2 layers at least.

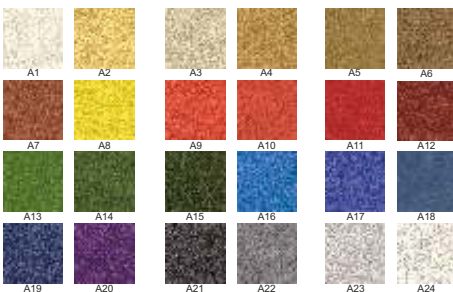

Description	Consumption
PU FLEX 140 - Special, polyurethane, two-component adhesive.	1kg/m ² for 1 layer
ISOPOL 854 - Shock-pad in rolls.	
ELASTOTURF 851 - Acrylic, elastic, slip-resistant, coating for sports flooring systems.	2.2-2.5kg/m ² for 3 layers

OUTDOOR SPORTS FLOORING

WET-POUR POLYFLEX PU-EX

Outdoor highly resilient sports flooring system ideal for multipurpose areas, tennis, basketball, volleyball, handball, football courts, as well as any other outdoor sports court.

Combination of a mixture of **PU BINDER 1118** plus **RECYCLED RUBBER 858** in granulometry of 0.5-2mm, in thickness of 8mm up to 14mm and polyurethane elastic top coating system in 2mm thickness.

Steps:

1. PU PRIMER 870 - Special, polyurethane primer.

Applied by airless sprayer or brush on asphalt surfaces or on waterproof concrete surfaces, without rising humidity issues.

2. Mixture of PU BINDER 1118 and RECYCLED RUBBER 858 - Elastic, shock-absorbent, wet-pour system.



The **RECYCLED RUBBER 858** is in granulometry of 0.5-2mm. The mixture is applied by paving machine in thickness from 6mm to 12mm or more.

3. POLYSPORT STUCCO 1050 - Polyurethane, elastic, two-component pore filler.

Used for sealing porous of wet-pour or prefabricated shock-absorbent sub-floor of sports flooring systems. Applied by flat trowel.

4. POLYSPORT PU 1051 - Polyurethane, self-leveling, two-component coat for outdoor sports surfaces.

It is combined with wet-pour or prefabricated, shock-absorbent, resilient rubber cushion as substrate to create multipurpose sports flooring systems. Pore filling with **POLYSPORT STUCCO 1050** precedes its application. Applied by V-notch trowel and the parallel use of spiked roller.

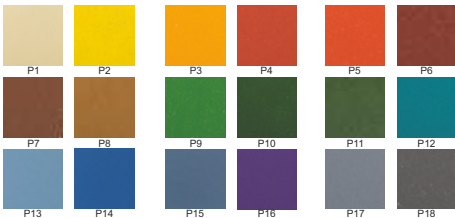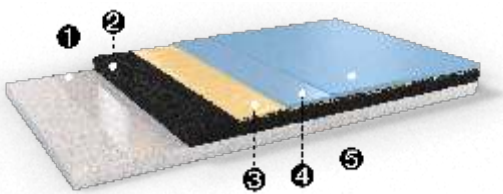

5. POLYSPORT 1052 - UV-resistant, polyurethane, aliphatic, two-component top coating for outdoor sports flooring.

Applied in two crossing layers by airless sprayer or short haired mohair roller.

Description	Consumption
PU PRIMER 870 - Special, polyurethane primer.	0.2-0.3kg/m ² for 2 layers
PU BINDER 1118 - Polyurethane binder.	1.2kg/m ² for 10mm mixture
RECYCLED RUBBER 858 - SBR granules in granulometry of 0.5-2mm.	6kg/m ² for 10mm mixture
POLYSPORT STUCCO 1050 - Polyurethane, elastic, two-component pore filler.	1.3-2.5kg/m ² for 2 layers depending on the SBR granulometry
POLYSPORT PU 1051 - Polyurethane, self-leveling, two-component coat for outdoor sports surfaces.	2-2.2kg/m ² for 1 layer
POLYSPORT 1052 - UV-resistant, polyurethane, two-component, top coating for outdoor sports flooring.	0.25kg/m ² for 2 layers

OUTDOOR SPORTS FLOORING

POLYFLEX PU-EX

Outdoor highly resilient sports flooring system ideal for multipurpose areas, tennis, basketball, volleyball, handball, football courts, as well as any other outdoor sports court. Combination of prefabricated shock-pad and polyurethane coatings in 6mm up to 16mm average total thickness.

Certified system by LABOSPORT Institute and KIWA Institute.

Steps:

1. PU FLEX 140 - Special, polyurethane, two component adhesive.

It is applied with a V-notch trowel, on dry waterproof, smooth, power-troweled surfaces of concrete, without rising humidity issues, or asphalt. Used for the application of **ISOPOL 854** shock-pads or other prefabricated shock-absorbent rolls made from recycled rubber or **EPDM** granules.

2. ISOPOL 854 - Shock-pad in rolls.



Elastic, prefabricated shock-pad made of recycled rubber granules providing shock-absorbency, in thickness of 4mm up to 14mm. Used as cushion substrate before the application of polyurethane or acrylic systems.

3. POLYSPORT STUCCO 1050 - Polyurethane, elastic, two-component pore filler.

Used for sealing porous of wet-pour or prefabricated shock-absorbent sub-floor of sports flooring systems. Applied by flat trowel.

4. POLYSPORT PU 1051 - Polyurethane, self-leveling, two-component coat for outdoor sports surfaces.

It is combined with **ISOPOL 854** as substrate to create multi-purpose shock-absorbent resilient sports flooring systems. Pore filling with **POLYSPORT STUCCO 1050** precedes its application. Applied by a V-notch trowel and the parallel use of spiked roller.

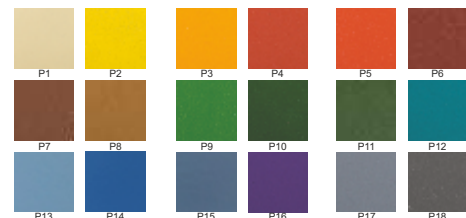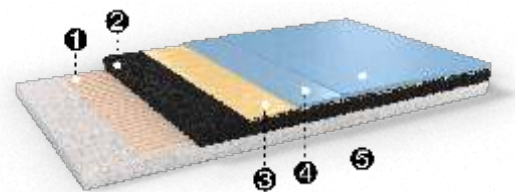

5. POLYSPORT 1052 - UV-resistant, polyurethane, aliphatic, two-component top coating for outdoor sports flooring.

Applied, in two crossing layers by airless sprayer or short haired mohair roller.

Description

Consumption

PU FLEX 140 - Special, polyurethane, two-component adhesive.

1kg/m²
for 1 layer

ISOPOL 854 - Shock-pad in rolls.

POLYSPORT STUCCO 1050 - Polyurethane, elastic, two-component pore filler.

0.7-0.8kg/m²
for 2 layers on rolls

POLYSPORT PU 1051 - Polyurethane, self-leveling, two-component coat for outdoor sports surfaces.

2-2.2kg/m²
for 1 layer

POLYSPORT 1052 - UV-resistant, polyurethane, two-component, top coating for outdoor sports flooring.


0.25kg/m²
for 2 layers

OUTDOOR SPORTS FLOORING

COLORFLEX

Elastic, wet-pour, polyurethane, safety flooring ideal for schoolyards, playground flooring and also for volleyball, handball, basketball, football courts and multipurpose courts. Consists of 2 layers, the first of which is a mixture of **PU BINDER 1118** and **RECYCLED RUBBER 858**(1-3mm) (shock-pad layer), which can be applied in thickness from 6mm to 20mm. The second layer is a mixture of **PU BINDER 1118** with **EPDM 856** (1-3mm) applied by paving machine or by trowel with the parallel use of a cylinder (10kg) in thickness from 6 mm up to 15mm.

It can create many designs and patterns by the use of different colors of **EPDM 856**. It is applied in total thickness from 12 mm up to 35mm, only over cured asphalt surfaces and waterproofed power-troweled smooth concrete surfaces without rising humidity issues.

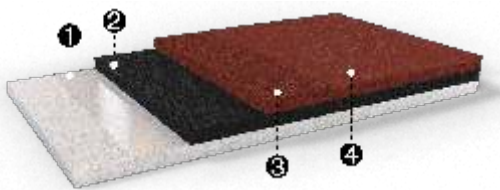

Steps:

1. PU PRIMER 870 - Special, polyurethane primer.

Applied by airless sprayer or brush on asphalt surfaces or on waterproof concrete surfaces without rising humidity issues.

2. Mixture of PU BINDER 1118 and RECYCLED RUBBER 858 - Elastic, shock-absorbent, wet-pour system.

Applied by paving machine. Alternatively, it can be applied by flat metal trowel after spreading and leveling with rake and straightedge. Rolling with cylinder follows for compacting. Thickness from 6mm up to 20mm.

3. Mixture of PU BINDER 1118 and EPDM 856.

Applied by paving machine. Alternatively, it can be applied by flat metal trowel after spreading and leveling with rake and straightedge. Rolling with cylinder follows for compacting. Thickness from 6mm up to 15mm.

4. POLYSPORT XP 1069 - UV-resistant, two-component, universal, mat top coating for the protection of EPDM granules.

Applied in two crossing layers by airless sprayer or short haired mohair roller in the desired color. It serves as dual protection from UV sunlight and color fading while giving the possibility to create different designs and patterns.

Description	Consumption
PU PRIMER 870 - Special, polyurethane primer.	0.2-0.3kg/m ² for 2 layers
PU BINDER 1118 - Polyurethane binder.	1kg/m ² for 10mm mixture
RECYCLED RUBBER 858 - SBR granules in granulometry of 1-3mm.	6kg/m ² for 10mm mixture
PU BINDER 1118 - Polyurethane binder.	2kg/m ² for 10mm mixture
EPDM 856 - EPDM granules in granulometry of 1-3mm.	10kg/m ² for 10mm mixture
POLYSPORT XP 1069 - UV-resistant, two-component, universal, mat top coating for the protection of EPDM granules against UV radiation.	0.4kg/m ² for 2 layers

CYCLING TRACKS

SPORTGROUND-EX

Outdoor resilient medium-hard acrylic flooring system ideal for cycling tracks, surrounding areas in sports grounds, parks, pathways etc.

Combination of wet-pour acrylic coatings in total average thickness of 2.2mm.

Certified system by LABOSPORT Institute.

Steps:

1. RITIVEX R LIQUID 1102 - Acrylic primer.



Used as primer of acrylic coatings, such as **ELASTOSPORT 853**, **ELASTOTURF 851**, **SUPER ELASTOCOAT 842**, **ELASTOMARK 818** or **SMARTCOAT 880**. Applied by airless sprayer or brush.

2. ELASTOSPORT 853 - Acrylic, one component, smoothing and repairing wet-pour resurfacer for sports flooring systems.

Consists of acrylic resins, quartz sand and specials improver. It is applied by squeegee on dry compact asphalt to seal the porosity and smooth out the surface before the application of **CORRIDOL 864**. Highly resistant to adverse weather conditions (snow, frost, heat waves etc.) after drying.

3. CORRIDOL 864 - Acrylic, slip-resistant coating for outdoor surfaces.

It is applied by squeegee on waterproof, smooth, concrete surfaces, without rising humidity issues, or asphalt surfaces. Prior application of **ELASTOSPORT 853** is recommended to fill in and smooth out the underlying substrate. Highly resistant to adverse weather conditions (snow, frost, heat waves etc.) after drying.

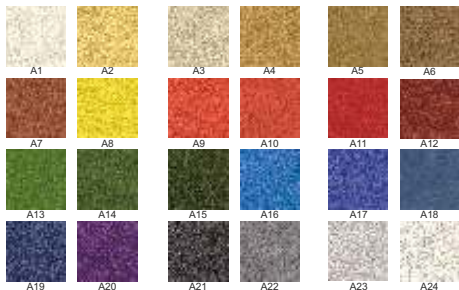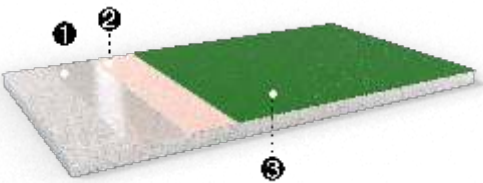

Description	Consumption
RITIVEX R LIQUID 1102 - Acrylic primer.	0.2-0.3kg/m ² for 1 layer
ELASTOSPORT 853 - Acrylic, one component, smoothing and repairing wet-pour resurfacer for sports flooring systems.	2kg/m ² for 2 layers depending on the porosity of the asphalt substrate
CORRIDOL 864 - Acrylic, slip-resistant coating for outdoor surfaces.	1.5kg/m ² for 3 layers

CYCLING TRACKS

DECOQUARTZ



Consists of colored quartz aggregates broadcasting, in granulometry of 0.7-1.2mm, and two-component polyurethane resins for outdoor applications.

Recommended for cycling tracks, for anti-slip outdoor flooring, ramps, stairs, for surrounding areas of swimming pools, in city squares etc.



Steps:

- 1. PU PRIMER 870 - Polyurethane primer.**
Applied by airless sprayer or brush.
- 2. COLOR QUARTZ AGGREGATES - In granulometry of 0.7-1.2mm.**
Broadcasted.
- 3. PU COATING - Polyurethane, UV-resistant, two-component coating.**
Applied by airless sprayer.
- 4. COLOR QUARTZ AGGREGATES - In granulometry of 0.7-1.2mm.**
Broadcasted.
- 5. POLFLOOR PU 807 - Polyurethane, two-component UV-resistant sealing coat.**
Highly resistant to adverse weather conditions (snow, frost, heat waves, etc.). Applied by airless sprayer.

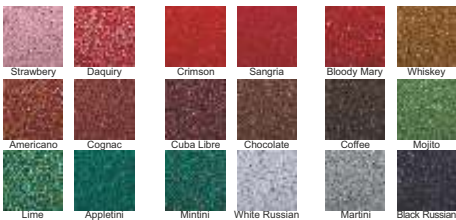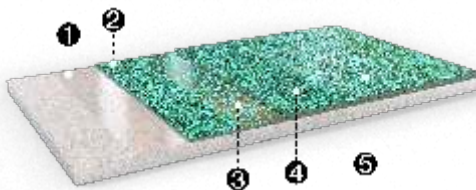

Description	Consumption
PU PRIMER 870 - Polyurethane primer.	0.35kg/m ² for 2 layers
COLOR QUARTZ AGGREGATES (in granulometry of 0.7-1.2mm).	2.5kg/m ²
PU COATING - Polyurethane, UV-resistant, two-component coating.	0.2kg/m ² for 1 layer
COLOR QUARTZ AGGREGATES (in granulometry of 0.7-1.2mm).	2.5kg/m ²
POLFLOOR PU 807 - Polyurethane, two-component, UV-resistant sealing coat.	0.45kg/m ² for 2 layers

RUNNING TRACKS

POLTRACK SPRAYCOAT

Synthetic outdoor system for running tracks in total thickness of 13.5mm.

It is applied on fine asphalt or smooth, waterproof concrete, without rising humidity issues, in two basic layers. The first, base layer, is mixed at site, and consists of the polyurethane binder **POLAPLAST P13** and **RECYCLED RUBBER 858**, SBR granules. The second layer, spray layer, is applied at site and consists of the colored polyurethane spray coating **POLAPLAST P12** and **EPDM 856**.

Certified system by WORLD ATHLETICS and according to EN 14877.



Steps:

- 1. POLAPLAST P10 - Polyurethane primer.**
Applied by airless sprayer or brush.
- 2. Mixture of POLAPLAST P13 and RECYCLED RUBBER 858 in granulometry of 1-4mm.**
Applied by paving machine.
- 3. Mixture of POLAPLAST P12 and EPDM 856 in granulometry of 0.5-1.5mm.**
Applied by spraying machine in two crossing layers.



Description	Consumption
POLAPLAST P10 - Polyurethane primer.	0.2kg/m ²
BASE LAYER	
POLAPLAST P13 - One-component, polyurethane binder.	1.32kg/m ² for 11mm mixture
RECYCLED RUBBER 858 in granulometry of 1-4mm.	6.6kg/m ² for 11mm mixture
SPRAY LAYER	
POLAPLAST P12 - Colored, two-component polyurethane spray coating.	1.35kg/m ² for 2.5mm mixture
EPDM 856 in granulometry of 0.5-1.5mm.	0.9kg/m ² for 2.5mm mixture

RUNNING TRACKS

POLTRACK SEALED SPRAYCOAT


Synthetic outdoor system for running tracks in total thickness of 13.5mm.

It is applied on fine asphalt or smooth, waterproof concrete, without rising humidity issues. Consists of: a first, base layer mixed at site, a mixture of the polyurethane binder **POLAPLAST P13** and **RECYCLED RUBBER 858**, SBR granules, a second layer (sealing layer), the polyurethane pore filler **POLYSPORT STUCCO 1050** and then a third layer, a spray coat, applied at site, which consists of the spraycoat, colored polyurethane binder **POLAPLAST P12** and **EPDM 856**.



Steps:

- 1. POLAPLAST P10 - Polyurethane primer.**
Applied by airless sprayer or brush.
- 2. Mixture of POLAPLAST P13 and RECYCLED RUBBER 858 in granulometry of 1-4mm.**
Applied by paving machine.
- 3. POLYSPORT STUCCO 1050 - Polyurethane, elastic, two-component pore filler.**
Used for sealing porous prefabricated subfloor of sports flooring such as **ISOPOL 854** or wet-pour cushion shock-absorbent mixtures. Applied by flat trowel.
- 4. Mixture of POLAPLAST P12 and EPDM 856 in granulometry of 0.5-1.5mm.**
Applied by spraying machine in two crossing layers.

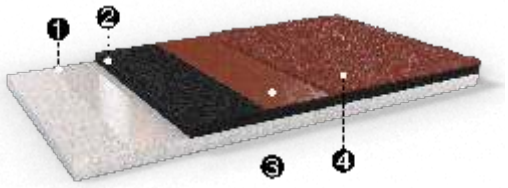

Description	Consumption
POLAPLAST P10 - Polyurethane primer.	0.2kg/m ²
BASE LAYER	
POLAPLAST P13 - One-component, polyurethane binder.	1.32kg/m ² for 11mm mixture
RECYCLED RUBBER 858 in granulometry of 1-4mm.	6.6kg/m ² for 11mm mixture
SEALING LAYER	
POLYSPORT STUCCO 1050 - Polyurethane, elastic, two-component pore filler.	2kg/m ² for 2 layers
SPRAY LAYER	
POLAPLAST P12 - Colored, two-component polyurethane spray coating.	1.35kg/m ² for 2.5mm mixture
EPDM 856 in granulometry of 0.5-1.5mm.	0.9kg/m ² for 2.5mm mixture

RUNNING TRACKS

POLTRACK SANDWICH

Synthetic outdoor system for running tracks in total thickness of 13.4mm.


It is applied on fine asphalt or smooth, waterproof concrete, without rising humidity issues. Consists of: a first, base layer, mixed at site, a mixture of the polyurethane binder **POLAPLAST P13** and **RECYCLED RUBBER 858**, SBR granules, a second layer (sealing layer) the colored, polyurethane sealing coating **POLAPLAST P22** on top of the cushion mixture, and a third layer (surface layer) the full-PU colored polyurethane coating **POLAPLAST P20**, before broadcasting **EPDM** granules on top to finish it off.

Certified system by WORLD ATHLETICS and according to EN 14877.



Steps:

- 1. POLAPLAST P10 - Polyurethane primer.**
Applied by airless sprayer or brush.
- 2. Mixture of POLAPLAST P13 and RECYCLED RUBBER 858 in granulometry of 1-4mm.**
Applied by paving machine.
- 3. POLAPLAST P22 - Colored polyurethane sealing layer.**
Applied by flat trowel.
- 4. POLAPLAST P20 - Colored, polyurethane full-PU, self-leveling surface layer.**
Applied by V-notch trowel and the parallel use of spiked roller.
- 5. Broadcasting EPDM granules in granulometry 1-3mm.**

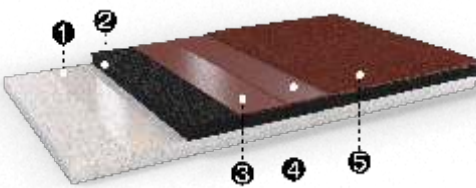

Description	Consumption
POLAPLAST P10 - Polyurethane primer.	0.2kg/m ²
BASE LAYER	
POLAPLAST P13 - One-component, polyurethane binder.	1.2kg/m ² for 10mm mixture
RECYCLED RUBBER 858 in granulometry of 1-4mm.	6kg/m ² for 10mm mixture
SEALING LAYER	
POLAPLAST P22 - Colored, polyurethane sealing layer.	2kg/m ² for 2 layers
SURFACE LAYER	
POLAPLAST P20 - Colored, polyurethane full-PU surface layer.	2.5kg/m ² for 3.4mm mixture
EPDM 856 in granulometry of 1-3mm.	3.6kg/m ² for 3.4mm mixture

RUNNING TRACKS

POLTRACK ROLL-SANDWICH

Synthetic outdoor system for running tracks in total thickness of 14.5mm.

It is applied on fine asphalt or smooth, waterproof concrete, without rising humidity issues. Consists of: a first, base layer, the prefabricated shock-pad **ISOPOL 854**, a second layer (sealing layer) the colored, polyurethane, sealing coating **POLAPLAST P22** on top of the rolls, and a third layer (surface layer) the full-PU colored polyurethane coating **POLAPLAST P20**, before broadcasting **EPDM** granules on top to finish it off.

Certified system by WORLD ATHLETICS.

Steps:

1. PU FLEX 140 - Special, polyurethane adhesive.

Used for the application of **ISOPOL 854** shock-pads or other prefabricated shock-absorbent rolls made from recycled rubber or EPDM granules. Applied by V-notch trowel.

2. ISOPOL 854 - Shock-pad in rolls.

Elastic, prefabricated shock-pad made of recycled rubber providing shock-absorbency. Used as cushion substrate before the application of polyurethane or acrylic systems.


3. POLAPLAST P22 - Colored polyurethane sealing layer.

Applied by flat trowel.

4. POLAPLAST P20 - Colored, polyurethane full-PU, self-leveling surface layer.

Applied by V-notch trowel and the parallel use of spiked roller.

5. Broadcasting EPDM granules in granulometry 1-3mm.

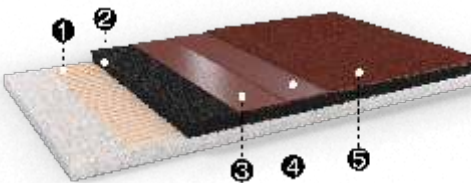

Description	Consumption
PU FLEX 140 - Special, polyurethane adhesive.	1kg/m ²
BASE LAYER	
ISOPOL 854 - Shock-pad in rolls.	
SEALING LAYER	
POLAPLAST P22 - Colored polyurethane sealing layer.	0.8kg/m ² for 2 layers
SURFACE LAYER	
POLAPLAST P20 - Colored polyurethane full-PU surface layer.	2.5kg/m ²
EPDM 856 in granulometry of 1-3mm.	3.6kg/m ²

RUNNING TRACKS

POLTRACK FULL-PU

Synthetic outdoor system for running tracks in stadiums in total thickness of 15mm.

It is applied on fine asphalt or smooth, waterproof concrete, without rising humidity issues. After laying a PU primer for adhesion, follows the first layer (base layer), which consists of the FULL-PU colored polyurethane coating **POLAPLAST P28** and **RECYCLED RUBBER 858** broadcasted on top (fresh-on-fresh), a second layer comprising again the FULL-PU colored polyurethane coating **POLAPLAST P28** laid on the surface and **RECYCLED RUBBER 858** broadcasted on top (fresh-on-fresh) and the third layer (surface layer) is the full-PU colored polyurethane coating **POLAPLAST P28** laid on the surface and **EPDM** granules broadcasted on top to finish it off (fresh-on-fresh).

Certified system by WORLD ATHLETICS.

Steps:

1. POLAPLAST P10 - Polyurethane primer.


Applied by airless sprayer or brush.

2. POLAPLAST P28, specially modified, colored full-PU coating, applied by V-notch trowel.

3. RECYCLED RUBBER 858, SBR granules, broadcasted on the surface.

4. POLAPLAST P28, specially modified, colored full-PU coating, applied by V-notch trowel.

5. RECYCLED RUBBER 858, SBR granules, broadcasted on the surface.

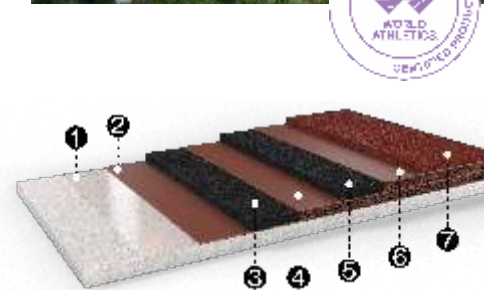

6. POLAPLAST P28, specially modified, full-PU coating, applied by V-notch trowel.

7. EPDM 856, EPDM granules, broadcasted on the surface.

Description	Consumption
POLAPLAST P10 - Polyurethane primer.	0.2kg/m ²
BASE LAYER	
POLAPLAST P28 - Specially modified, colored polyurethane full-PU coating.	2.7kg/m ² for 5mm mixture
RECYCLED RUBBER 858 in granulometry of 1-4mm.	3kg/m ² for 5mm mixture
SECOND LAYER	
POLAPLAST P28 - Specially modified, colored polyurethane full-PU coating.	2.8kg/m ² for 5mm mixture
RECYCLED RUBBER 858 in granulometry of 1-4mm.	2.6kg/m ² for 5mm mixture
SURFACE LAYER	
POLAPLAST P28 - Specially modified, colored polyurethane full-PU coating.	2.8kg/m ² for 5mm mixture
EPDM 856 in granulometry of 1-3mm.	4.2kg/m ² for 5mm mixture


RUNNING TRACKS

POLTRACK FULL-PU EPDM

Synthetic outdoor system for running tracks in stadiums in total thickness of 15mm.

It is applied on fine asphalt or smooth, waterproof concrete, without rising humidity issues. After laying a PU primer for adhesion, follows the first layer (base layer), which consists of the FULL-PU colored polyurethane coating **POLAPLAST P28** and **EPDM 856** broadcasted on top (fresh-on-fresh), a second layer comprising again the FULL-PU colored polyurethane coating **POLAPLAST P28** laid on the surface and **EPDM 856** broadcasted on top (fresh-on-fresh) and the third layer (surface layer) is again the full-PU colored polyurethane coating **POLAPLAST P28** laid on the surface and **EPDM 856** granules broadcasted on top to finish it off (fresh-on-fresh).

Certified system by WORLD ATHLETICS.

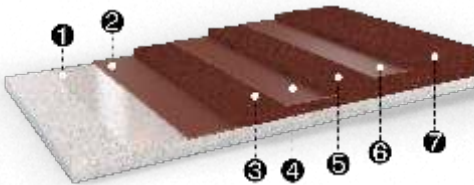

Steps:

- 1. POLAPLAST P10 - Polyurethane primer.**
Applied by airless sprayer.
- 2. POLAPLAST P28 - Specially modified, colored, full-PU, coating.** Applied by V-notch trowel.
- 3. EPDM 856 - EPDM granules,** broadcasted on the surface.
- 4. POLAPLAST P28 - Specially modified, colored, full-PU, coating.** Applied by V-notch trowel.
- 5. EPDM 856 - EPDM granules,** broadcasted on the surface.
- 6. POLAPLAST P28 - Specially modified, colored, full-PU, coating.** Applied by V-notch trowel.
- 7. EPDM 856 - EPDM granules,** broadcasted on the surface.

Description	Consumption
POLAPLAST P10 - Polyurethane primer.	0.2kg/m ²
BASE LAYER	
POLAPLAST P28 - Specially modified, colored polyurethane full-PU coating.	2.7kg/m ² for 5mm mixture
EPDM 856 in granulometry of 1-3mm.	4kg/m ² for 5mm mixture
SECOND LAYER	
POLAPLAST P28 - Specially modified, colored polyurethane full-PU coating.	2.8kg/m ² for 5mm mixture
EPDM 856 in granulometry of 1-3mm.	3.5kg/m ² for 5mm mixture
SURFACE LAYER	
POLAPLAST P28 - Specially modified, colored polyurethane full-PU coating.	2.8kg/m ² for 5mm mixture
EPDM 856 in granulometry of 1-3mm.	4.2kg/m ² for 5mm mixture

RUNNING TRACKS

POLTRACK SPRAYCOAT ACRYLIC


Innovative, new, synthetic outdoor economical system with a shock-pad for running tracks, in thickness of 13mm, or as outdoor system for refreshing old courts. It is applied on fine asphalt or smooth, or waterproof concrete without rising humidity issues. Consists of: a first, base layer mixture, mixed at site, of the polyurethane binder **POLAPLAST P13** and **RECYCLED RUBBER 858**, a second layer (sealing layer) the acrylic pore filler **ELASTOTURF NEUTRO** on top of the cushion mixture or even directly on old, clean acrylic surfaces. The final layer (surface layer) is the mixture of highly pigmented 100% acrylic **ELASTOTURF TRACK** with colored **EPDM** granules in fine granulometry.

It is designed for use on new asphalt or over existing colored surfaces. Ideal solution for making old track surfaces look good as new or make a new track altogether.



Steps:

- 1. POLAPLAST P10 - Polyurethane primer.**
Applied by airless sprayer or brush.
- 2. Mixture of POLAPLAST P13, RECYCLED RUBBER 858.**
Applied by paving machine.
- 3. ELASTOTURF NEUTRO- Acrylic pore filler.**
Applied by squeegee.
- 4. Mixture of ELASTOTURF TRACK and EPDM granules.**
It is applied by paving machine or squeegee in two or three layers.

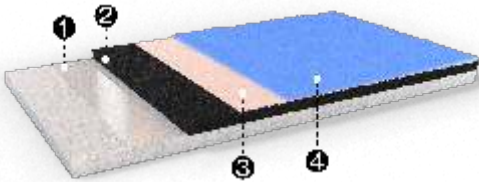

Description	Consumption
POLAPLAST P10 - Polyurethane primer.	0.2kg/m ²
BASE LAYER	
POLAPLAST P13 - One-component, polyurethane binder.	1.2kg/m ² for 10mm mixture
RECYCLED RUBBER 858 in granulometry of 1-4mm.	6kg/m ² for 10mm mixture
SEALING LAYER	
ELASTOTURF NEUTRO - Acrylic pore filler.	1.3-2.5kg/m ²
TOP LAYER	
ELASTOTURF TRACK - 100% modified acrylic.	1kg/m ² in 2 layers for 2mm 1.5kg/m ² in 3 layers for 3mm
EPDM 856 in granulometry of 0.5-1.5mm.	0.9kg/m ²

JOGGING TRACKS

POLTRACK JOGGING TRACK

Elastic, seamless, flexible coloured flooring, ideal for jogging tracks in total thickness of 18mm.

It consists of a shock-pad base of 2 layers. First layer is a mixture of **PU BINDER 1118** and **RECYCLED RUBBER 858- SBR** granules and the second layer is a flexible, colored mixture of **PU BINDER 1118** and **EPDM** granules. Follows the PU self-leveling coating, **POLYSPORT PU 1051** with **EPDM DUST** as a sealing layer and finally the PU, UV-resistant aliphatic top coating, **POLYSPORT 1052**, in two crossing layers.

Certified system by LABOSPORT Institute.

Steps:

1. PU PRIMER 870 - Polyurethane primer.

Applied by airless sprayer or brush.


2. Mixture of PU BINDER 1118 and RECYCLED RUBBER 858 (in granulometry of 2-5mm or 3-5mm) applied by paving machine.

3. Mixture of PU BINDER 1118 and EPDM 856 (in granulometry of 0.5-1.5mm) applied by paving machine.

4. Mixture of POLYSPORT PU 1051 and EPDM dust as a sealing layer for filling the porous of the prefabricated subfloor of sports flooring such as **ISOPOL 854** or wet-pour cushion shock-pads. Applied by flat trowel.

5. POLYSPORT PU 1051 - Polyurethane, self-leveling, two-component coat for outdoor sports surfaces.

It is combined with wet-pour, shock-absorbent, resilient rubber cushion as substrate to create multipurpose sports flooring systems. Applied by V-notch trowel and the parallel use of spiked roller.

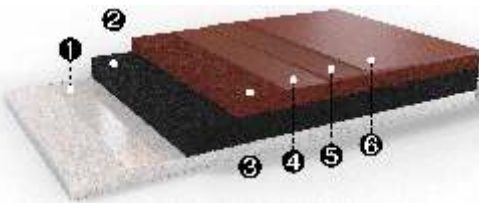

6. POLYSPORT 1052 - UV-resistant, polyurethane, two-component, top coating for outdoor sports flooring.

Applied, in two crossing layers by airless sprayer or a short haired mohair roller.

Description	Consumption
PU PRIMER 870 - Polyurethane primer.	0.2kg/m ² for 2 layers
BASE LAYER	
PU BINDER 1118 - Polyurethane binder.	1.2kg/m ² for 12mm mixture
RECYCLED RUBBER 858 in granulometry of 2-5mm or 3-5mm.	7.2kg/m ² for 12mm mixture
TOP LAYER	
PU BINDER 1118 - Polyurethane binder.	1kg/m ² for 5mm mixture
EPDM 856 in granulometry of 0.5-1.5mm.	5kg/m ² for 5mm mixture
SEALING LAYER	
POLYSPORT PU 1051 - Polyurethane, self-leveling, two-component coat for outdoor sports surfaces.	1.3kg/m ²
EPDM DUST.	0.2kg/m ²
SELF-LEVELING LAYER	
POLYSPORT PU 1051 - Polyurethane, self-leveling, two-component coat for outdoor sports surfaces	2.2kg/m ²
TOP COATING	
POLYSPORT 1052 - UV-resistant, polyurethane, two-component, top coating for outdoor sports flooring.	0.3kg/m ² for 2 layers

JOGGING TRACKS

POLTRACK PU JOGGING TRACK

Elastic, seamless, flexible colored flooring, ideal for jogging tracks in total thickness of 18mm.

It consists of a shock-pad base of **PU BINDER 1118** with **RECYCLED RUBBER 858**. Follows the PU, flexible pore filler coating **POLYSPORT STUCCO 1050**, and then the PU self-leveling coating, **POLYSPORT PU 1051**. Finally a sealing PU, UV-resistant aliphatic top layer, **POLYSPORT 1056**, is applied in two crossing layers.

The success in the application depends on the right preparation of the underlay and use of the material.

Steps:

1. PU PRIMER 870 - Special, polyurethane primer.

Applied by airless sprayer or brush on asphalt surfaces or on waterproof concrete surfaces without rising humidity issues.

2. Mixture of PU BINDER 1118 and RECYCLED RUBBER 858 - Elastic, shock-absorbent, wet-pour system.

The **RECYCLED RUBBER 858** is in granulometry of 0.5-2mm. The mixture is applied by paving machine in thickness of 16mm.

3. POLYSPORT STUCCO 1050 - Polyurethane, elastic, two-component pore filler.



Used for sealing porous wet-pour shock-pad sub-floors of sports floorings systems. Applied by flat trowel.

4. POLYSPORT PU 1051 - Polyurethane, self-leveling, two-component coat for outdoor sports surfaces.

It is combined with wet-pour, shock-absorbent, resilient rubber cushion as substrate to create multipurpose sports flooring systems. Pore filling with **POLYSPORT STUCCO 1050** precedes its application. Applied by V-notch trowel and the parallel use of spiked roller.

5. POLYSPORT 1056 - UV-resistant, polyurethane, aliphatic, two-component top coating for outdoor sports floorings.

Applied, in two crossing layers by airless sprayer or short haired mohair roller.

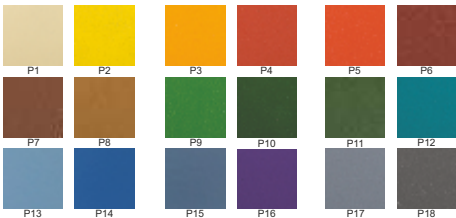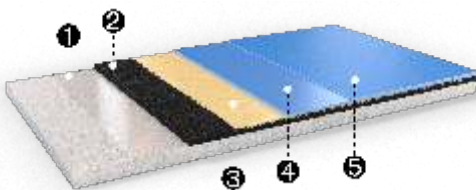

Description	Consumption
PU PRIMER 870 - Special, polyurethane primer.	0.2-0.3kg/m ² for 2 layers
PU BINDER 1118 - Polyurethane binder.	1.92kg/m ² for 16mm mixture
RECYCLED RUBBER 858 - SBR granules in granulometry of 0.5-2mm.	9.6kg/m ² for 16mm mixture
POLYSPORT STUCCO 1050 - Polyurethane, elastic, two-component pore filler.	1.3-1.5kg/m ² for 2 layers
POLYSPORT PU 1051 - Polyurethane, self-leveling, two-component coat for outdoor sports surfaces.	2-2.2kg/m ² for 1 layer
POLYSPORT 1056 - UV-resistant, polyurethane, two-component, top coating for outdoor sports flooring.	0.3kg/m ² for 2 layers

INDOOR SPORTS FLOORING

POLYFLEX PU-IN

Indoor highly resilient sports flooring system ideal for multipurpose halls, gym floors, tennis, basketball, volleyball, handball, futsal courts, as well as any other indoor sports court.

Combination of prefabricated shock-pads and polyurethane coatings in 6mm up to 16mm average total thickness.

Certified system by LABOSPORT Institute and according to EN 14904.

Steps:

1. PU FLEX 140 - Special, polyurethane, two-component adhesive.

It is applied, with a V-notch trowel, on dry waterproof surfaces of concrete, without rising humidity issues or asphalt. Used for the application of **ISOPOL 854** shock-pads or other prefabricated shock-absorbent rolls made from recycled rubber or EPDM.

2. ISOPOL 854 - Shock-pad in rolls.



Elastic, prefabricated shock-pad made of recycled rubber providing shock-absorbency, in thickness of 4mm up to 12mm. Used as cushion substrate before the application of polyurethane or acrylic systems.

3. POLYSPORT STUCCO 950 - Polyurethane, elastic, two-component pore filler.

Used for sealing porous prefabricated subfloor of sports floorings such as **ISOPOL 854** or wet-pour cushion shock-pads. Applied by flat trowel.

4. POLYSPORT PU 951 - Polyurethane, self-leveling, two-component coat for indoor sports surfaces.

It is combined with **ISOPOL 854** as substrate to create multi-purpose shock-absorbent resilient sports flooring systems. Pore filling with **POLYSPORT STUCCO 950** precedes its application. Applied by V-notch trowel and the parallel use of spiked roller.

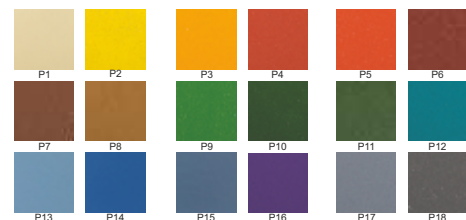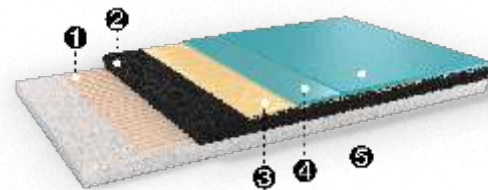

5. POLYSPORT 952 - Polyurethane, aliphatic, two-component top coating for indoor sport floorings.

Applied, in two crossing layers by airless sprayer or short haired mohair roller.

Description	Consumption
PU FLEX 140 - Special, polyurethane, two-component adhesive.	1kg/m ² for 1 layer
ISOPOL 854 - Shock-pad in rolls.	
POLYSPORT STUCCO 950 - Polyurethane, elastic, two-component pore filler.	0.8kg/m ² for 2 layers on rolls
POLYSPORT PU 951 - Polyurethane, self-leveling, two-component coat for indoor sports surfaces.	2-2.2kg/m ² for 1 layer
POLYSPORT 952 - Polyurethane, aliphatic, two-component top coating for indoor sports flooring.	0.25kg/m ² for 2 layers

INDOOR SPORTS FLOORING

WET-POUR POLYFLEX PU-IN

Indoor highly resilient sports flooring system ideal for multipurpose halls, tennis, basketball, volleyball, handball, futsal courts, as well as any other indoor sports court.

Combination of a mixture of **PU BINDER 1118** plus **RECYCLED RUBBER 858-SBR granules** in granulometry of 0.5-2mm, applied by paver machine in thickness of 6mm up to 14mm and polyurethane elastic top coating system in 2mm thickness.

Steps:

1. PU PRIMER 870 - Special, polyurethane primer.

Applied by airless sprayer or brush on asphalt surfaces or on waterproof concrete surfaces without rising humidity issues.

2. Mixture of PU BINDER 1118 plus RECYCLED RUBBER 858 - Elastic, shock-absorbent, wet-pour mixture.



The **RECYCLED RUBBER 858** is in granulometry of 0.5-2mm. The mixture is applied by paving machine in thickness from 6mm up to 12mm or more.

3. POLYSPORT STUCCO 950 - Polyurethane, elastic, two-component pore filler.

Used for sealing porous prefabricated subfloor of sports floorings such as **ISOPOL 854** or wet-pour cushion shock-pads. Applied by flat trowel.

4. POLYSPORT PU 951 - Polyurethane, self-leveling, two-component coat for indoor sports surfaces.

It is combined with wet-pour, shock-absorbent, resilient rubber cushion as substrate to create multipurpose sports flooring systems. Pore filling with **POLYSPORT STUCCO 950** precedes its application. Applied by V-notch trowel and the parallel use of spiked roller.

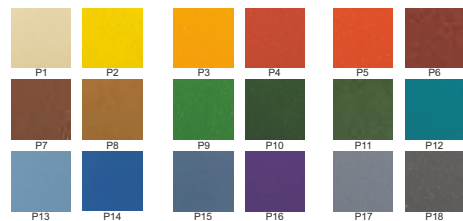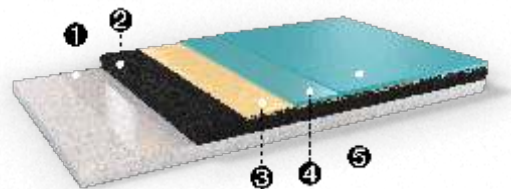

5. POLYSPORT 952 - Polyurethane, aliphatic, two-component top coating for indoor sport flooring.

Applied, in two crossing layers by airless sprayer or short haired mohair roller.

Description	Consumption
PU PRIMER 870 - Special, polyurethane, primer.	0.2-0.3kg/m ² for 2 layers
PU BINDER 1118 - Polyurethane binder.	1.2kg/m ² for 10mm mixture
RECYCLED RUBBER 858 - SBR granules in granulometry of 0.5-2mm.	6kg/m ² for 10mm mixture
POLYSPORT STUCCO 950 - Polyurethane, elastic, two-component pore filler.	1.5kg/m ² for 2 layers depending on the SBR granulometry
POLYSPORT PU 951 - Polyurethane, self-leveling, two-component coat for indoor sports surfaces.	2-2.2kg/m ² for 1 layer
POLYSPORT 952 - Polyurethane, aliphatic, two-component top coating for indoor sport flooring.	0.25kg/m ² for 2 layers

INDOOR SPORTS FLOORING

POLYFLEX AEL-IN

Indoor highly flexible shock-absorbent, acrylic sports flooring system, ideal for multipurpose halls, gym floors, tennis, basketball, volleyball, handball, futsal courts, as well as any other indoor sports court.

Combination of prefabricated shock-pads in rolls with acrylic-based and polyurethane based coatings in average total thickness of 8 up to 14mm.



Steps:

1. PU FLEX 140 - Special, polyurethane, two component, adhesive.

It is applied, with V-notch trowel, on dry waterproof surfaces of concrete without rising humidity issues or asphalt. Used for the application of **ISOPOL 854** shock-pads or other prefabricated shock-absorbent rolls made from recycled rubber or EPDM.

2. ISOPOL 854 - Shock-pad in rolls.



Elastic, prefabricated shock-pad made of recycled rubber providing shock-absorbency, in thickness of 4mm up to 12mm. Used as cushion substrate before the application of polyurethane or acrylic systems.

3. ELASTOTURF 851S - Acrylic, elastic, smooth, coating for sports flooring systems.

Consists of acrylic resins, powder quartz sand and special improver. It is combined with **ISOPOL 854** as substrate to create multi-purpose sports flooring systems. Applied by squeegee.

4. POLYSPORT 952 - Polyurethane, aliphatic, two-component top coating for indoor sports flooring.

Applied, in two crossing layers by airless sprayer or short haired mohair roller.

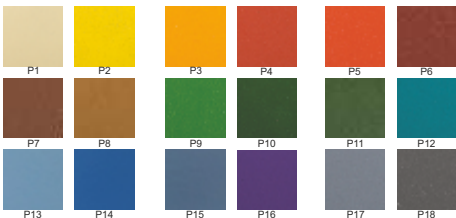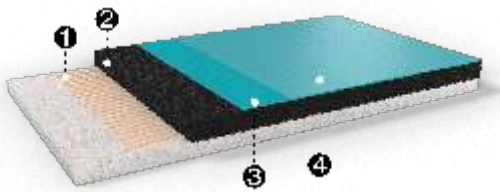

Description	Consumption
PU FLEX 140 - Special, polyurethane, two-component adhesive.	1kg/m ² for 1 layer
ISOPOL 854 - Shock-pad in rolls.	
ELASTOTURF 851S - Acrylic, elastic, smooth coating for sports floors systems.	2.2-2.5kg/m ² for 3 layers
POLYSPORT 952 - Polyurethane, aliphatic, two-component top coating for indoor sports flooring.	0.35kg/m ² for 2 layers

INDOOR SPORTS FLOORING

WET-POUR POLYFLEX AEL-IN

Indoor highly flexible shock-absorbent, acrylic sports flooring system, ideal for multipurpose halls, gym floors, tennis, basketball, volleyball, handball, futsal courts, as well as any other indoor sports court.

Combination of a mixture of **PU BINDER 1118** and **RECYCLED RUBBER 858 - SBR granules** in granulometry of 0.5-2mm, applied by paver machine in thickness of 6mm up to 14mm, with acrylic-based and polyurethane-based coatings.



Steps:

1. PU PRIMER 870 - Special, polyurethane primer.

Applied by airless sprayer or brush on asphalt surfaces or on waterproof concrete surfaces without rising humidity issues.

2. Mixture of PU BINDER 1118 and RECYCLED RUBBER 858(minimum 6mm) - Elastic, shock-absorbent, wet-pour mixture.



The **RECYCLED RUBBER 858** is in granulometry of 0.5-2mm. Applied by paver machine in thickness from 6mm up to 14mm or more.

3. ELASTOTURF 851S - Acrylic, elastic, smooth, coating for sports flooring systems.

Consists of acrylic resins, powder quartz sand and special improver. Applied by squeegee in three layers at least.

4. POLYSPORT 952 - Polyurethane, aliphatic, two-component top coating for indoor sports flooring.

Applied, in two crossing layers by airless sprayer or short haired mohair roller.

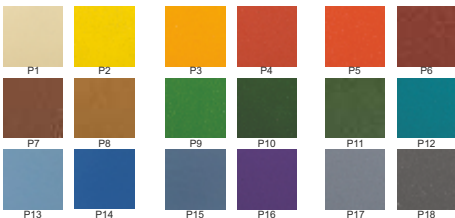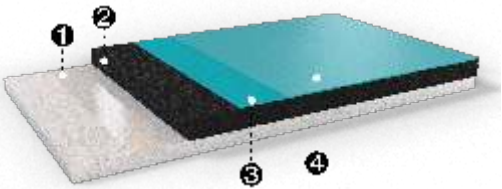

Description	Consumption
PU PRIMER 870 - Special, polyurethane, primer.	0.2-0.3kg/m ² for 2 layers
PU BINDER 1118 - Polyurethane binder.	1.32kg/m ² for 10mm mixture
RECYCLED RUBBER 858 - SBR granules in granulometry of 0.5-2mm.	6kg/m ² for 10mm mixture
ELASTOTURF 851S - Acrylic, elastic, smooth coating for sports floors systems.	3.5-3.8kg/m ² for 3 layers
POLYSPORT 952 - Polyurethane, aliphatic, two-component top coating for indoor sports flooring.	0.35kg/m ² for 2 layers

PLAYGROUND FLOORING

SAFEPOL MULTICOLOR

Elastic, safety wet-pour flooring ideal for children playground flooring, applied at site in various thickness from 4cm up to 20cm, even on compacted, clean, dry gravel and on cement or asphalt surfaces.

Consists of a mixture of **PU BINDER 1118** and **RECYCLED RUBBER 858** in granulometry of 1-3mm for the first layer (**SAFEPOL**) and of a mixture of **PU BINDER 1118** and **EPDM 856** in granulometry of 1-3mm or 1-4mm for the upper layer (**SAFEPOL MULTICOLOR**).

It can create many designs and patterns in a variety of **EPDM** colors. The final top coating over the epdm surface is the UV-resistant, mat, top coating **POLYSPORT XP 1069** in two crossing layers.

Certified according to EN 1177.

Steps:

1. PU PRIMER 870 - Special, polyurethane primer.

Applied by airless sprayer or brush.

2. Mixture of PU BINDER 1118 and RECYCLED RUBBER 858 in granulometry of 1-3mm.

Applied by flat metal trowel after spreading and leveling with rake and straightedge. Rolling with cylinder follows for compacting.

3. Mixture of PU BINDER 1118 and EPDM 856 in granulometry of 1-3mm or 1-4mm.

Applied by flat metal trowel after spreading and leveling with rake and straightedge. Rolling with cylinder follows for compacting.

4. POLYSPORT XP 1069 - UV-resistant, two-component, universal, mat, top coating for the protection of EPDM granules against UV radiation.

Applied in two crossing layers by airless sprayer or short haired mohair roller on the surface in the desired color, as dual protection from UV sunlight and color fading while giving the possibility to crate different designs and patterns. Necessary protection for all EPDM colors except basic colors of KDF's colorchart, E3 & E10.



Description	Consumption
PU PRIMER 870 - Special, polyurethane, primer.	0.2-0.3kg/m ² for 2 layers
PU BINDER 1118 - Polyurethane binder.	1kg/m ² for 10mm mixture
RECYCLED RUBBER 858 - SBR granules in granulometry of 1-3mm.	6kg/m ² for 10mm mixture
PU BINDER 1118 - Polyurethane binder.	2kg/m ² for 10mm mixture
EPDM 856 in granulometry of 1-3mm or 1-4mm.	10kg/m ² for 10mm mixture
POLYSPORT XP 1069 - UV-resistant, two-component, universal, mat, top coating for the protection of EPDM granules against UV radiation.	0.4kg/m ² for 2 layers

PLAYGROUND FLOORING

SAFEPOL MULTICOLOR WITH TPV GRANULES

Elastic, safety wet-pour flooring ideal for children playground flooring, applied at site in various thickness from 4cm up to 20cm, even on compacted, clean, dry gravel and on cement or asphalt surfaces.

Consists of a mixture of **PU BINDER 1118** and **RECYCLED RUBBER 858** in granulometry of 1-3mm for the first layer (**SAFEPOL**) and of a mixture of **PU BINDER 1118** and **KDF TPV** granules in granulometry of 1-3mm or 2-4mm for the upper layer (**SAFEPOL TPV MULTICOLOR**). The final top coating over the TPV surface is the UV-resistant, mat, top coating **POLYSPORT XP 1069** in two crossing layers.

It can create many designs and patterns in a variety of **KDF TPV** colors.



Steps:

1. PU PRIMER 870 - Special, polyurethane primer.

Applied by airless sprayer or brush.

2. Mixture of PU BINDER 1118 and RECYCLED RUBBER 858 in granulometry of 1-3mm.



Applied by flat metal trowel after spreading and leveling with rake and straightedge. Rolling with cylinder follows for compacting.

3. Mixture of PU BINDER 1118 and KDF TPV granules in granulometry of 1-3mm or 2-4mm.

Applied by flat metal trowel after spreading and leveling with rake and straightedge. Rolling with cylinder follows for compacting.

4. POLYSPORT XP 1069 - UV-resistant, two-component, universal, mat, top coating for the protection of EPDM and TPV granules against UV radiation.

Applied in two crossing layers by airless sprayer or short haired mohair roller on the surface in the desired color, as dual protection from UV sunlight and color fading while giving the possibility to create different designs and patterns. Necessary protection for all EPDM/TPV colors except basic colors of KDF's colorchart, E3 & E10 and TPV 6 & TPV 9.

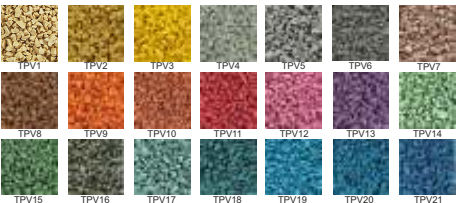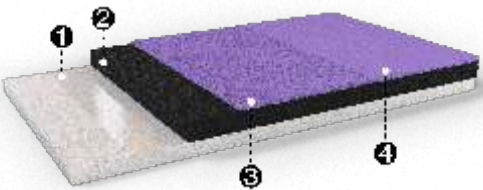

Description	Consumption
PU PRIMER 870 - Special, polyurethane, primer.	0.2-0.3kg/m ² for 2 layers
PU BINDER 1118 - Polyurethane binder.	1kg/m ² for 10mm mixture
RECYCLED RUBBER 858 - SBR granules in granulometry of 1-3mm.	6kg/m ² for 10mm mixture
PU BINDER 1118 - Polyurethane binder.	2kg/m ² for 10mm mixture
KDF TPV granules in granulometry of 1-3mm or 2-4mm.	10kg/m ² for 10mm mixture
POLYSPORT XP 1069 - UV-resistant, two-component, universal, mat, top coating for the protection of EPDM/TPV granules against UV radiation.	0.4kg/m ² for 2 layers

PLAYGROUND FLOORING

SAFEPOL SBR COLOURANT

Elastic, safety wet-pour flooring ideal for children playground flooring, applied at site in various thickness from 15 mm up to 150 mm or more, even and compacted, clean, dry gravel surfaces and on cement or asphalt surfaces.

Consists of a mixture of **PU BINDER 1118** and **RECYCLED RUBBER 858**, in granulometry of 1-3mm or 2-4mm for the first layer (**SAFEPOL**) and of a mixture of **KDF special pigments**, in 11 different shades, **PU BINDER 1118** and **RECYCLED RUBBER 858**, in granulometry of 1-3mm or 2-4 mm, for the second layer (**SAFEPOL COLOURANT**).

It can create many designs and patterns in a variety of colors. The final top coating over the SBR surface is the UV-resistant, two-component, universal, mat, top coating **POLYSPORT XP 1069**, for the protection of the SBR coloured granules in two crossed spray layers.

Steps:

1. PU PRIMER 870 - Special, polyurethane primer.

Applied by airless sprayer or brush.

2. Mixture of PU BINDER 1118 and RECYCLED RUBBER 858 in granulometry of 1–3mm or 2-4mm.


Applied by flat metal trowel after spreading and leveling with rake and straightedge.

3. Mixture of KDF special pigments, PU BINDER 1118 and RECYCLED RUBBER 858 in granulometry of 1–3mm or 2-4mm.

Applied by flat metal trowel after spreading and leveling with rake and straightedge. Rolling with cylinder follows for compacting.

4. POLYSPORT XP 1069 - UV-resistant, two-component, universal, mat, top coating for the protection of the colored SBR granules against UV radiation.

Applied in two crossing layers by airless sprayer better or short haired mohair roller on the surface in the desired color, as dual protection from UV sunlight and color fading while giving the possibility to create different designs and patterns.

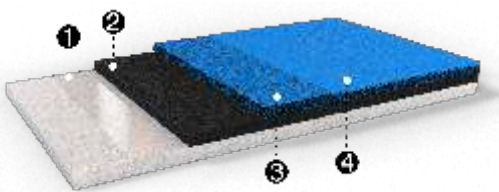

Description	Consumption
PU PRIMER 870 - Special, polyurethane, primer.	0.2-0.3kg/m ² for 2 layers
PU BINDER 1118 - Polyurethane binder.	1kg/m ² for 10mm mixture
RECYCLED RUBBER 858 - SBR granules in granulometry of 1-3mm or 2-4mm.	6kg/m ² for 10mm mixture
KDF PIGMENT	0.15-0.60kg depending on the colourant quantity (2%, 4%, 6% or
PU BINDER 1118 - Polyurethane binder.	1.45kg/m ² for 10mm mixture
RECYCLED RUBBER 858 - SBR granules in granulometry of 1-3mm or 2-4mm.	6kg/m ² for 10mm mixture
POLYSPORT XP 1069 - UV-resistant, two-component, universal, mat, top coating for the protection of the colored SBR granules against UV radiation.	0.4kg/m ² for 2 layers

PLAYGROUND FLOORING

SAFEPOL SANDPROOF

Innovative, elastic, seamless, flexible colored flooring **with sandproof properties**, ideal for school courtyards and playground flooring.

It consists of a cushion base of 2 layers. First layer is a mixture of **PU BINDER 1178** and **RECYCLED RUBBER 858** (granulometry 2-4mm or 2-5mm), in thickness of 30-110mm. Second layer is a mixture of **PU BINDER 1178** and **RECYCLED RUBBER 858** (granulometry 0,5-2mm) in thickness of 10mm. Then follows the **modified sealing, sandproof and waterproof KDF-PU 1055** pore filler with high elasticity in 2 crossing layers followed by the polyurethane self-leveling **POLYSPORT PU 1051** and then the **modified, KDF-PU 1056, sealing, UV-resistant, aliphatic, elastic, glossy top layer** in 3 crossing layers.

Certified system by TUV and LABOSPORT Institute.

Steps:

1. PU PRIMER 870 - Special, polyurethane primer.



Applied by brush or airless sprayer on asphalt surfaces or on waterproof concrete surfaces without rising humidity issues.

2. Mixture of PU BINDER 1178 and RECYCLED RUBBER 858 in granulometry of 2-4mm or 2-5mm. Application with paving machine, in thickness of 30-110mm.

3. Mixture of PU BINDER 1178 and RECYCLED RUBBER 858 in granulometry of 0.5-2mm. Application with paving machine, in thickness of 10mm.

4. KDF-PU 1055 - Polyurethane, modified, sandproof and waterproof, elastic pore filler. Applied by metal trowel to create a completely non porous surface.

5. POLYSPORT PU 1051 - Polyurethane, self-leveling, two-component coat for outdoor surfaces. Applied by V-notch trowel and the parallel use of spiked roller.

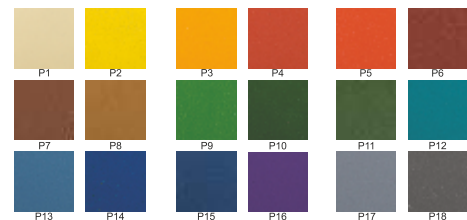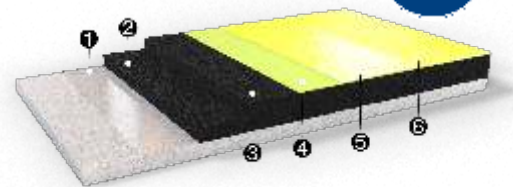

6. KDF-PU 1056 - Polyurethane, modified, UV-resistant, aliphatic, elastic, glossy, two-component top coating. Applied, in two crossing layers by airless sprayer or short haired mohair roller.

Description	Consumption
PU PRIMER 870 - Special, polyurethane primer.	0.2-0.3kg/m ² for 2 layers
PU BINDER 1178 - Special, polyurethane binder.	1kg/m ² for 10mm mixture
RECYCLED RUBBER 858 - SBR granules in granulometry of 2-4mm or 2-5mm.	6kg/m ² for 10mm mixture
PU BINDER 1178 - Special, polyurethane binder.	1.2kg/m ² for 10mm mixture
RECYCLED RUBBER 858 - SBR granules in granulometry of 0.5-2mm.	6kg/m ² for 10mm mixture
KDF-PU 1055 - Polyurethane, modified, sandproof and waterproof, elastic pore filler.	1.5kg/m ² for 2 layers
POLYSPORT PU 1051 - Polyurethane, self-leveling, two-component coat for indoor sports surfaces.	2.2kg/m ² for 1 layer
KDF-PU 1056 - Polyurethane, modified, UV-resistant, aliphatic, elastic, glossy, two-component top coating, protection against UV radiation.	0.3kg/m ² for 2 layers

PLAYGROUND FLOORING

QUICKLAWN SAFEPOL

Elastic, safety flooring ideal for children playground flooring, applied at site in various thickness from 30mm up to 120mm even on compacted, clean, dry gravel and on cement or asphalt surfaces.

Consists of a prefabricated special safety pad for playground flooring, **RAPIDFOAM 868**, followed by a layer of **PU PRIMER 870** with a polyester net and on top a mixture, in 15mm thickness, of **PU BINDER 1118** with **EPDM 856** (in granulometry of 1-3mm or 1-4mm) (upper layer). The final coating over the epdm surface is the UV-resistant, mat, top coating **POLYSPORT XP 1069** in two crossing layers.

It can create many designs and patterns in a variety of **EPDM** colors.



Steps:

1. **RAPIDFOAM 868** - Prefabricated special safety pad for playground flooring.

2. **PU PRIMER 870** - Special, polyurethane primer with the parallel use of a polyester net.


Applied by airless sprayer or brush.

3. **Mixture of PU BINDER 1118 and EPDM 856 in granulometry of 1-3mm or 1-4mm in 15mm thickness.**

Applied by flat metal trowel after spreading and leveling with rake and straightedge. Rolling with cylinder follows for compacting.

4. **POLYSPORT XP 1069** - UV-resistant, two-component, universal, mat, top coating for the protection of EPDM granules against UV radiation.

Applied in two crossing layers by airless sprayer or short haired mohair roller on the surface in the desired color, as dual protection from UV sunlight and color fading while giving the possibility to create different designs and patterns. Necessary protection for all EPDM colors except basic colors of KDF's colorchart, E3 & E10.

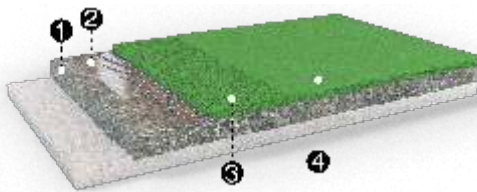

Description

Consumption

RAPIDFOAM 868 - Prefabricated special safety pad for playground flooring.

PU PRIMER 870 - Special, polyurethane primer.

0.2-0.3kg/m²
for 2 layers

POLYESTER NET

PU BINDER 1118 - Polyurethane binder.

3kg/m²
for 15mm mixture

EPDM 856 - EPDM granules in granulometry of 1-3mm or 1-4mm.

15kg/m²
for 15mm mixture

POLYSPORT XP 1069 - UV-resistant, two-component, universal, mat, top coating for the protection of EPDM granules against UV radiation.

0.4kg/m²
for 2 layers

SPLASH PARKS

AQUASOFT-EX

Innovative, seamless, elastic colorful, anti-slip, long lasting polymer flooring for water parks and splash park areas providing excellent safety and convenience for children and users in thickness of 4mm.



Our water park, splash park flooring is the unique polymeric system for wet areas in constant contact in water or near water continuously.

Consist of special polymeric resins and elastic elements.

Certified according to EN 14877, ASTM F925-13, ISO 22196:2011, EN 12616, EN 20105, EN 14836 .

Steps:

- 1. POLYSPORT DAMP PROOF BARRIER - Special, polyurethane primer.** Used as water barrier on damp concrete substrates and as an adhesive component between concrete surfaces and sports coatings. Application with roller, brush or squeegee.
- 2. QUARTZ SAND – In granulometry of 0.2-0.4mm.** Broadcasted on the last layer of **POLYSPORT DAMP PROOF BARRIER** while is still wet.
- 3. DECOPOOL PU PRIMER 1870 - Special, polyurethane, two component primer.**
Applied by brush or airless sprayer on asphalt surfaces or on waterproof concrete surfaces without rising humidity issues.
- 4. AQUASOFT 8055 - Specially, modified, two component, polymeric self-leveling coating.** It's solvent free and easy to apply, it shows a good curing behavior even at low or high temperature. Applied with V-notched trowel and a spiked roller.
- 5. ELASTIC ELEMENTS - Rubber granules.** Granulometry of 0.5mm. Broadcasted on the wet fresh self-leveling surface.
- 6. AQUASOFT 8055 - Specially, modified, two component, polymeric self-leveling coating.** It's solvent free and easy to apply, it shows a good curing behavior even at low or high temperature. Applied with V-notched trowel and a spiked roller.
- 7. ELASTIC ELEMENTS - Rubber granules.** Granulometry of 0.5mm. Broadcasted on the wet fresh self-leveling surface.

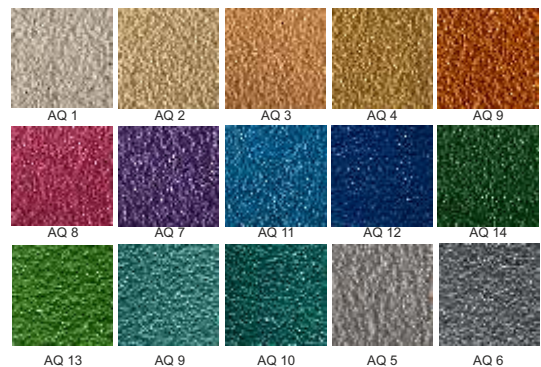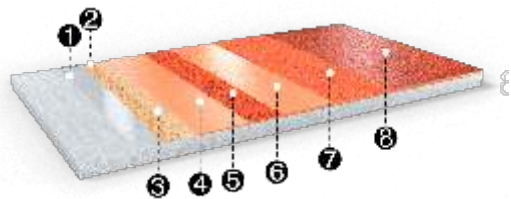

8. AQUASOFT 8052 - UV-resistant, polymer-based, two-component coating, colored or clear.

It is applied as a final, sealing layer on top of splash park flooring with an airless sprayer or a roller.

Description	Consumption
POLYSPORT DAMP PROOF BARRIER - Special, polyurethane primer.	0.4kg/m ² for 2 layers
QUARTZ SAND – In granulometry of 0.2-0.4mm.	1-1.5kg/m ²
DECOPOOL PU PRIMER 1870 - Special, polyurethane, two component primer.	0.2-0.3kg/m ²
AQUASOFT 8055 - Specially, modified, two component, polymeric self-leveling coating.	2.15kg/m ²
ELASTIC ELEMENTS - Rubber granules.	1.6-1.8kg/m ²
AQUASOFT 8055 - Specially, modified, two component, polymeric self-leveling coating.	2.15kg/m ²
ELASTIC ELEMENTS - Rubber granules.	1.6-1.8kg/m ²
AQUASOFT 8052 - UV-resistant, polymer-based, two-component coating.	0.6kg/m ² for 2 layers

SPLASH PARKS

AQUASOFT-EX WET-POUR

Innovative, seamless, wet-pour, elastic colorful, anti-slip, long lasting polymer flooring for water parks and splash park areas providing excellent safety and convenience for children and users, in thickness from 10mm up to 20mm.

Our water park, splash park flooring is the unique polymeric system for wet areas in constant contact in water or near water continuously.

Consist of wet-pour mixture of EPDM, special polymeric resins and elastic elements.

Certified according to EN 1177.

Steps:

1. POLYSPORT DAMP PROOF BARRIER - PU primer.

Used as water barrier on damp concrete substrates and as an adhesive component between concrete surfaces and sports coatings. Application with roller, brush or squeegee.

2. QUARTZ SAND – In granulometry of 0.2-0.4mm. Broadcasted on the last layer of POLYSPORT DAMP PROOF BARRIER while is still wet.

3. DECOPOOL PU PRIMER 1870 - Special, polyurethane, two component primer.

Applied by brush or airless sprayer on asphalt surfaces or on waterproof concrete surfaces without rising humidity issues.

4. Mixture of PU BINDER 1125AL and EPDM 856 in granulometry of 1-3mm.

Applied by flat metal trowel after spreading and leveling with rake and straightedge. Rolling with cylinder follows for compacting.

5. POLYSPORT STUCCO 8050 - Polyurethane, elastic two-component pore filler.


Used for sealing porous of wet-pour or prefabricated shock-absorbent sub-floor of sports flooring. Applied by trowel.

6. AQUASOFT 8055 - Specially, modified, two component, polymeric self-leveling coating.

It's solvent free and easy to apply, it shows a good curing behavior even at low or high temperature. Applied with V-notched trowel and a spiked roller.

7. ELASTIC ELEMENTS - Rubber granules.

Granulometry of 0.5mm. Broadcasted on the wet fresh self-leveling surface.

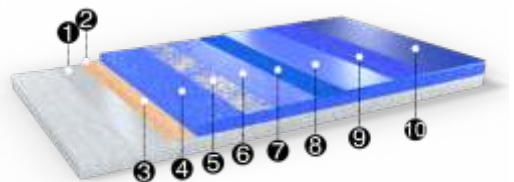

8. AQUASOFT 8055 - Specially, modified, two component, polymeric self-leveling coating.

It's solvent free and easy to apply, it shows a good curing behavior even at low or high temperature. Applied with V-notched trowel and a spiked roller.

9. ELASTIC ELEMENTS - Rubber granules.

Granulometry of 0.5mm. Broadcasted on the wet fresh self-leveling surface.

10. AQUASOFT 8052 - UV-resistant, polymer-based, two-component coating, colored or clear.

It is applied as a final, sealing layer on top of splash park flooring with an airless sprayer or a roller.

Description	Consumption
POLYSPORT DAMP PROOF BARRIER - PU Primer.	0.4kg/m ² for 2 layers
QUARTZ SAND – In granulometry of 0.2-0.4mm.	1-1.5kg/m ²
DECOPOOL PU PRIMER 1870 - Special, polyurethane, two component primer.	0.2kg/m ²
Mixture of PU BINDER 1125AL and EPDM 856 in granulometry of 1-3mm.	12kg/m ²
POLYSPORT STUCCO 8050 - Polyurethane, elastic two-component pore filler.	1.5kg/m ²
AQUASOFT 8055 - Specially, modified, two component, polymeric self-leveling coating.	2.15kg/m ²
ELASTIC ELEMENTS - Rubber granules.	1.6kg/m ²
AQUASOFT 8055 - Specially, modified, two component, polymeric self-leveling coating.	2.15kg/m ²
ELASTIC ELEMENTS - Rubber granules.	1.8kg/m ²
AQUASOFT 8052 - UV-resistant, polymer-based, two-component coating.	0.6kg/m ² for 2 layers

SPECIALIZED SYSTEMS

POLYSAFE WALL/FLOORING

Indoor safety system for walls and floor tailored for jails, focused on anti-self-harm, security, and durability.
Creates a safe, jointless wall or floor surface to protect restrained individuals from self-injury.
Ideal for jails and psychiatric clinics.



Steps:

- POLYSAFE GLUE 1100 – Special polyurethane glue for the SAFEBLOCK PADS.**
Applied by notched trowel.
- SAFEBLOCK - PU foam pads in thickness from 20mm up to 100mm.**
Specially pads for safety systems on walls and floors.
- POLYSAFE PRIMER 1170 - Special, polymer primer used on PU foam pads.**
Applied with airless sprayer or brush.
- POLYSAFE SELF LEVELING 1151 - Special, super flexible polymer, two-components self-leveling.**
Applied with a V-notched trowel, and the parallel use of a spiked roller, in thickness of 5mm or 8mm, while the tiles are still horizontal.
- POLYSAFE PORE FILLER 1150 - Special, elastic filler putty.**
Applied only on the joints, to create a smooth, seamless surface.
- POLYSAFE TOP COATING 1154 - Special, antiscratch, polymer coating.**
Applied in two crossing layers by airless sprayer or roller.



Description	Consumption
POLYSAFE GLUE 1100 – Special polyurethane glue for the SAFEBLOCK PADS.	1kg/m ²
SAFEBLOCK - PU foam pads in thickness from 20mm up to 100mm.	
POLYSAFE PRIMER 1170 - Special, polymer primer used on PU foam pads.	0.2-0.3kg/m ² for 2 layers
POLYSAFE SELF LEVELING 1151 - Special, super flexible polymer, two-components self-leveling.	7.5kg/m ² for 5mm 12kg/m ² for 8mm for 2 layers
POLYSAFE PORE FILLER 1150 - Special, elastic filler putty.	
POLYSAFE TOP COATING 1154 - Special, antiscratch, polymer coating.	0.2-0.3kg/m ² for 2 layers

SPECIALIZED SYSTEMS

BALLISTIX FLOOR

New, innovative, specialized seamless floor for shooting range halls.

Polyurethane flooring consisting of specially made rubber tiles, with thickness from 42mm up to 62mm, in combination with a PU system of 2mm thickness composed by PU pore filler, PU self-leveling and a protective top coat.

The floor is seamless and provides acoustic insulation and superior durability and easy-to-clean of the gun powder.



Steps:

1. POLYSAFE GLUE 1100 – Special polyurethane glue for the BALLISTIC TILES.

Applied by notched trowel.

2. BALLISTIC RUBBER TILES - Specially made rubber tiles for shooting range floors.

3. POLYESTER NET.

4. POLYSAFE PORE FILLER 1150 - Special, elastic filler putty.

Used for sealing porous prefabricated subfloor of sports floorings or wet-pour cushion shock-pads or rubber tiles.


Applied by flat trowel in two layers with the parallel use of a polyester net.

5. POLYSAFE SELF LEVELING 1151 - Special, super flexible polymer, two-components self-leveling.

It is combined with a shock-pad layer as substrate to create multi-purpose shock-absorbent resilient sports flooring systems. Pore filling with POLYSPORT STUCCO 950 precedes its application. Applied by notched trowel and the parallel use of spike roller.

6. POLYSAFE TOP COATING 1154 - Special, antiscratch, polymer coating.

Applied in two crossing layers by airless sprayer or roller.

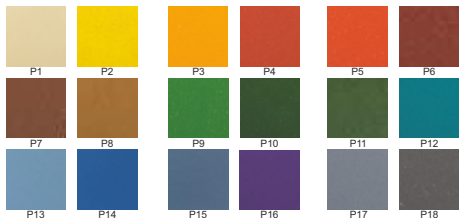

Description	Consumption
POLYSAFE GLUE 1100 – Special polyurethane glue for the BALLISTIC TILES.	1kg/m ²
BALLISTIC RUBBER TILES - Specially made rubber tiles for shooting range floors.	
POLYESTER NET	
POLYSAFE PORE FILLER 1150 - Special, elastic filler putty.	2kg/m ²
POLYSAFE SELF LEVELING 1151 - Special, super flexible polymer, two-components self-leveling.	2.2-2.5kg/m ²
POLYSAFE TOP COATING 1154 - Special, antiscratch, polymer coating.	0.25kg/m ²

SPECIALIZED SYSTEMS

KDF NATURA FLOORING

KDF NATURA FLOORING is composed of sustainable materials such as vegetable oils, cork, wood, and natural color pigments. It is seamless, smooth, and can be customized in color and pattern, with a matte finish.


This system creates a durable, resilient, and natural-looking indoor floor with excellent mechanical and insulation properties.

Multi-certified system.



Steps:

- 1.KDF NATURA PRIMER - Special, modified primer.**
Applied by brush on asphalt surfaces or on waterproof concrete surfaces without rising humidity issues.
- 2.KDF NATURA FLOORING - Revolutionary, linoleum flooring in paste form.**
Applied by notched trowel and rollers in the desired thickness.
- 3.KDF NATURA TOP COAT - Special, modified mat top coat.**
Applied with rollers.

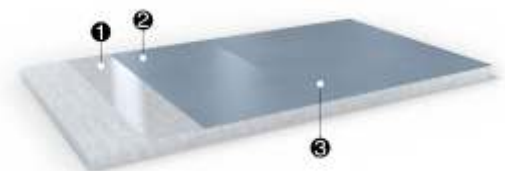

Description	Consumption
KDF NATURA PRIMER - Special, primer.	0.3kg/m ²
KDF NATURA FLOORING - Revolutionary, liquid linoleum flooring.	0.93-1kg/m ² /mm for 2 layers
KDF NATURA TOP COAT - Special, mat top coat.	0.1kg/m ²

POOL PAINTS AND DECORATIVE COATINGS

DECOPOOL FLOOR

High end decorative coating for flooring and wall for swimming pools areas, water parks, splash parks and fun parks and for any outdoor area with light and medium traffic like terraces, hotel surroundings and corridors.

It is a spray system which consists of a polymer two component resin and high aesthetics elements in different colour combinations.

It can be applied in swimming pools as floor and wall coating, as well as a coating over any concrete decking and over waterproof concrete areas with high productivity per day.

It is combined perfectly with **AQUASOFT-EX** system for water park flooring in terms of children's safety.

DECOPOOL offers a unique colourful solution (16 plus combinations) in the preferred design and pattern.



Steps:

1. POLYSPORT DAMP PROOF BARRIER - PU primer.

Used as water barrier on damp concrete substrates and as an adhesive component between concrete surfaces and sports coatings. Application with roller, brush or squeegee.

2. ELASTIC ELEMENTS in granulometry of 0.2-0.5mm.

Application by spray gun for a vertical surface or broadcasted for a horizontal surface.

3. DECOPOOL 1152 - Two component, transparent resin.

Application by airless sprayer.

4. ELASTIC ELEMENTS in granulometry of 0.2-0.5mm.

Application by spray gun for a vertical surface or broadcasted for a horizontal surface..


5. DECOPOOL 1152 - Two component, transparent resin.

Application by airless sprayer in one layer.

6. Sanding of the surface between the first and the last two layers of **DECOPOOL 1152**.

7. DECOPOOL 1152 - Two component, transparent resin.

Application by airless sprayer in three layers.

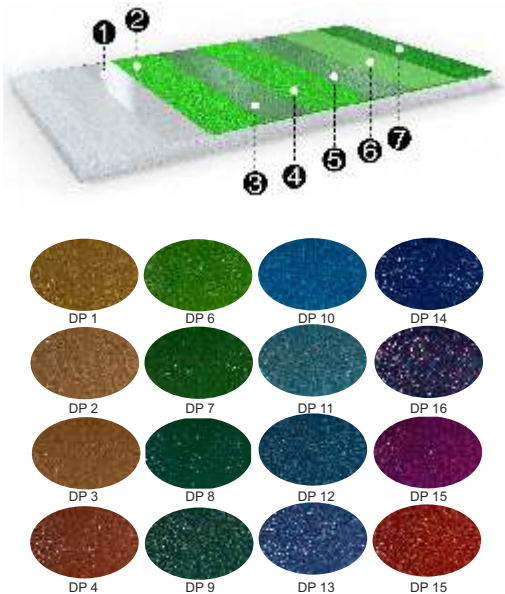

Description	Consumption
POLYSPORT DAMP PROOF BARRIER - PU Primer.	0.5-0.55kg/m ² for 3 layers
ELASTIC ELEMENTS - Rubber granules in granulometry of 0.2-0.5mm.	0.2kg/m ² for 1 layer
DECOPOOL 1152 - Two component, transparent resin.	0.2kg/m ² for 1 layer
ELASTIC ELEMENTS - Rubber granules in granulometry of 0.2-0.5mm.	0.2kg/m ² for 1 layer
DECOPOOL 1152 - Two component, transparent resin.	0.5kg/m ² for 3 layers

POOL PAINTS AND DECORATIVE COATINGS

DECOPOOL PU 1807

Polyurethane-based, two component, swimming pool paint. It provides a shiny surface with permanent protection against UV radiation.

Creates an easy-to-clean surface and eliminates dust and decay from old & new flooring, reinforcing their durability.

It can be easily repaired locally if necessary.


Applied on dry surfaces only.



Steps:

1. DECOPOOL PU 1807 - PU, two component paint.

Applied by roller.

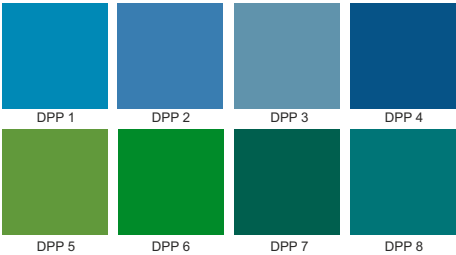

Description	Consumption
DECOPOOL PU 1807 - PU, two component paint.	0.3-0.6kg/m ² for 2 layers

RENOVATION SYSTEMS

SPORTFLOOR-EX FIX

Innovative new flooring system designed to repair and total refresh cracked or aged surface courts.

This advanced technology utilizes a multi-layered approach that not only fills in cracks and gaps but also strengthens the underlying structure, preventing future damage.

SPORTFLOOR-EX FIX system is easy to install, durable, and comes in a variety of finishes to match any decor.

Steps:

1. POLYSPORT DAMP PROOF BARRIER – Water barrier.

With a polyester net and silica sand.

It is used as water barrier on damp concrete substrates and as an adhesive component between concrete surfaces and sport coatings. Applied by short-haired mohair roller, brush, squeegee for smooth industrial surfaces.

2. POLYESTER NET AND QUARTZ AGGREGATES.



Installation of the polyester net following by the broadcasting of silica sand on the still-wet primed surface.

3. ELASTOSPORT 853 - Acrylic, one component, smoothing and repairing wet-pour resurfacer for sports flooring systems.

Consists of acrylic resins, quartz sand and special improver. It is applied by squeegee on smooth compact asphalt to seal the porosity and smooth out the surface before the application of **ELASTOTURF 851**. Highly resistant to adverse weather conditions(snow, frost, heat waves etc.) after drying.

4. ELASTOTURF 851 - Acrylic, elastic, slip-resistant, coating for sports flooring systems.

Consists of acrylic resins, quartz sand and special improver. It is combined with **ELASTOSPORT 853** as substrate to create multi-purpose sports flooring systems. Highly resistant to adverse weather conditions(snow, frost, heat waves etc.) after drying. Applied by squeegee.

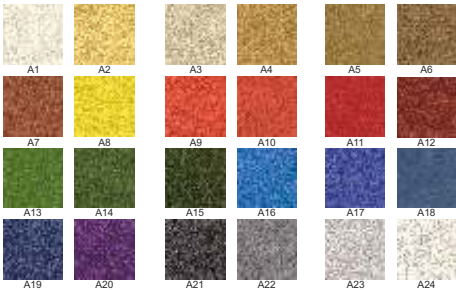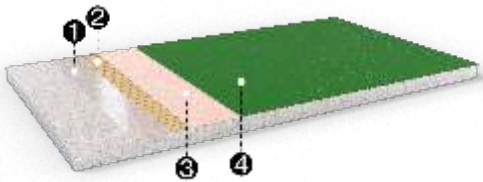

Description	Consumption
POLYSPORT DAMP PROOF BARRIER – Water barrier. + POLYESTER NET + QUARTZ AGGREGATES	0.35-0.4kg/m ² for 2 layers 2-2.5kg/m ²
ELASTOSPORT 853 - Acrylic, one component, smoothing and repairing wet-pour resurfacer for sports flooring systems.	2kg/m ² for 2 layers
ELASTOTURF 851 - Acrylic, elastic, slip-resistant, coating for sports flooring systems.	1.5kg/m ² for 3 layers

RENOVATION SYSTEMS

POLYFLEX PU REFRESH



POLYFLEX PU REFRESH is an innovative resurfacing system, the perfect solution for renewing outdated or old indoor PVC, LINOLEUM or other flooring without the hassle of removal.

With a wide range of colors to choose from, you can customize your floors according to your preferences while enjoying the benefits of easy maintenance and long-lasting durability provided by the top-grade materials and techniques.



Steps:

- 1. POLYSPORT PVC PRIMER – Special primer.**
Used on PVC or linoleum surfaces that acts as an adhesive component.
- 2. POLYSPORT PU 951 - Polyurethane, self-leveling, two-component coating for indoor sports surfaces.**
Applied by V-notch trowel (5-6mm) and the parallel use of spiked roller.
- 3. POLYSPORT 1068W – Water-based, mat or glossy, two-component top coating for sports flooring.**
Applied, in two crossing layers by airless sprayer or short haired mohair roller.

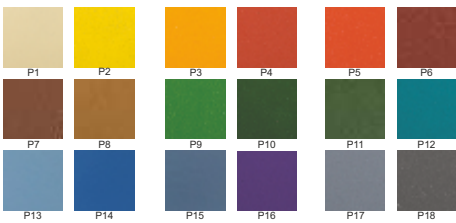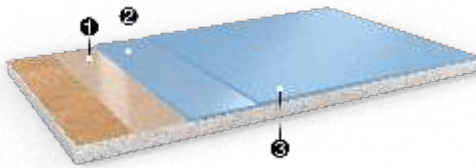

Description	Consumption
POLYSPORT PVC PRIMER – Special primer.	0.2-.03kg/m ² for 2 layers
POLYSPORT PU 951 - Polyurethane, self-leveling, two-component coating for indoor sports surfaces.	2-2.2kg/m ² for 1 layer
POLYSPORT 1068W – Water-based, mat or glossy, two-component top coating for sports flooring.	0.3kg/m ² for 2 layers

PROTECTIVE TOP COATINGS

POLYSPORT 1052

UV-resistant, polyurethane, two component, universal mat coating. Economical covering of outdoor sports flooring. Ideal for tennis, basketball, volleyball, handball, football and multipurpose sports courts.

Applied on prefabricated shock-pads or on wet-pour rubber cushion surfaces (mixture of PU BINDER plus SBR granules).

Also ideal for application on playground surfaces made by colored binder and SBR granules.

Perfect for refreshing old faded EPDM playground flooring and EPDM rubber safety tiles or colored SBR rubber tiles to create a new colored top surface with high UV resistance.

Consumption: 0.25-0.35 kg/m²



POLYSPORT PR 1065

POLYSPORT PR 1065 is a clear, one component, acrylic coating that protects acrylic outdoor sports surfaces and bicycle tracks from dirt and improves the easy cleaning and maintenance of the flooring.

It's applied as final protection layer that gives a glossy finish.

Consumption: 0.2 -0.25 kg/m²



POLYSPORT XP 1069

POLYSPORT XP 1069 is a two-component, mat finish coating with high UV resistance. It is applied as a final, protective layer **on top of playground flooring made from EPDM granules plus PU binder or also on recycled rubber tiles or EPDM tiles to maintain their colour.**

It doesn't change the EPDM structure or alter its appearance if applied properly by airless sprayer or even by simple rollers.

It is UV-resistant and thus absolutely suitable for outdoor playground rubber surfaces.

Ideal for renewing and refreshing old EPDM or rubber surfaces.

Consumption: 0.4 kg/m²



REPAIRING MATERIALS FOR SPORTS SURFACES

CRACKFIX 500

Acrylic mixture ideal for repairing and filling cracks on asphalt or concrete sport surfaces. To be mixed on-site with sand, cement and water.

Mix **CRACKFIX 500** binder with sand, cement and water with ratio of 1 kg **CRACKFIX 500** : 1 kg sand : 0.24-0.30 kg cement : app. 0.1 kg water.

For filling cracks 1kg material, **CRACKFIX 500**, will produce enough mix to fill 40 linear meter with 4mm width and 4mm depth.

FLOORFIX 600

FLOORFIX 600 is a two component, repairing flooring consisting of hard quartz or marble aggregates (grain thickness 1-3mm, 2-4mm and 2-5 mm or bigger) and polyurethane hard resins.

- Creates a high resistant, granule flooring without joints, not requiring maintenance.
- Suitable for exterior and interior usage, ideal as subfloor for sport floorings and running tracks.
- Resistant to mechanical stresses, wearing from friction and chemical effects.
- Applied in thickness from 5 mm till 100 mm.

Consumption: 20kg/per square meter (1.6 kg hard resin and 18.4 kg aggregates) for 10mm.

SHOCK ABSORBENT SUBFLOOR

ISOPOL 854

Elastic, prefabricated roll made of polyurethane polymers and recycled rubber particles for shock-absorbency, in thickness from 4mm up to 12mm.

It has excellent shock absorbent and noise reduction properties plus excellent non slip performance and fire resistance.

It can be used as a flexible sub-floor for indoor and outdoor sports flooring.



ISOPOL SBR-EPDM 855

Elastic, prefabricated roll made of polyurethane polymers and recycled rubber particles with **20% EPDM** rubber granules in thickness from 4mm up to 12mm.

It has excellent shock absorbent properties and offers noise abatement and has also excellent performance in slip resistance and fire behavior.

It is used mainly as a decorative, sport elastic flooring for indoor and outdoor sports courts and for gyms.



ISOPOL EPDM 856

Elastic, prefabricated roll made of polyurethane polymers and **100% EPDM** rubber granules in thickness from 4mm up to 12 mm.

It has excellent shock absorbent properties and offers noise abatement and has also excellent performance in slip resistance and fire behavior.

It is used mainly as a decorative, sport elastic flooring for indoor and outdoor sports courts and for gyms.



EQUINE FLOORING


POLTRACK EQUINE FLOORING

Synthetic, outdoor equine system in total thickness from 15mm up to 30 mm for horse stalls, barns, paddocks etc.

It consists of a first cushion layer (base layer) which is a mixture of the polyurethane binder **POLAPLAST P13** with **RECYCLED RUBBER 858** in various granulometries (2-4mm, 0.8-2.5mm and SBR dust), mixed and applied at site, followed by a second layer (sealing layer) the polyurethane semi-flexible, pore-sealing material **POLAPLAST P24** on top of the cushion mixture. Then follows the surface layer the full-PU colored polyurethane self-leveling, semi-elastic **POLAPLAST P25** and finally the top coating, the UV-resistant polyurethane aliphatic coating **POLYSPORT 1053** in two layers.

For anti-slip surface, after the application of the full-PU colored polyurethane self-leveling material **POLAPLAST P25** follows sanding of any irregularity of the final surface. Then the surface is coated with one layer of UV-resistant polyurethane aliphatic top coating **POLYSPORT 1053** followed by broadcasting of quartz sand 0.1-0.4mm (1,5-2kg/m²). Then the surface is coated with the UV-resistant polyurethane aliphatic top coating **POLYSPORT 1053** in two layers at least.

Certified system by KIWA-ISA Sport Institute.

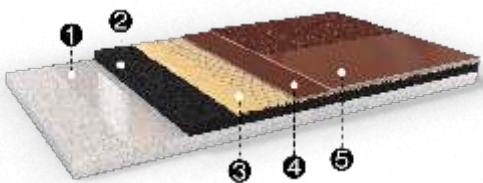

Steps:

1. **POLAPLAST P10** - Special, polyurethane primer. Applied with airless sprayer or brush.
2. **Mixture of POLAPLAST P13 and RECYCLED RUBBER 858** applied with paving machine.
3. **POLAPLAST P24** - Polyurethane sealing layer, with a polyester net. Applied with flat trowel.
4. **POLAPLAST P25** - Full-PU colored polyurethane self-leveling layer. Applied with V-notch trowel.
5. **POLYSPORT 1053** - UV-resistant polyurethane aliphatic top coating. Applied with airless sprayer or short haired mohair roller.

Description	Consumption
POLAPLAST P10 - Special, polyurethane primer.	0.3kg/m ² for 2 layers
BASE LAYER	
POLAPLAST P13 - Polyurethane binder.	3.24kg/m ² for 18mm
RECYCLED RUBBER 858 in granulometry of 2-4mm.	4.3kg/m ² for 18mm
RECYCLED RUBBER 858 in granulometry of 0.8-2.5mm.	3.25kg/m ² for 18mm
RECYCLED RUBBER 858, SBR dust.	3.25kg/m ² for 18mm
SEALING LAYER	
POLAPLAST P24 - Polyurethane sealing layer-pore sealer.	1.3kg/m ² for 2 layers
POLYESTER NET	
SURFACE LAYER	
POLAPLAST P25 - Colored, polyurethane self-leveling.	2.3kg/m ² for 1 layer
TOP COATING	
POLYSPORT 1053 - PU, top protective, aliphatic coating.	0.25kg/m ² for 2 layers

ARTIFICIAL GRASS

FOOTBALL FIELDS

POLITURF ACTION 60120 - FIFA SPECS

Synthetic turf for stadiums and mini football courts.

Yarn type: Polyethylene monofilament, diamond shape

Pile height: 60mm

Dtex: 12000

Gauge: 5/8"

Stitch: 140/m

Density: 8820/m²

Weight: 2885gr/m²



POLITURF EMERALD 60110

Synthetic turf for stadiums and mini football courts.

Yarn type: Polyethylene monofilament, diamond shape

Pile height: 60mm

Dtex: 11000

Gauge: 5/8"

Stitch: 140/m

Density: 8820/m²

Weight: 2577gr/m²



POLITURF TRIUMPH 60100

Synthetic turf for stadiums and mini football courts.

Yarn type: Polyethylene monofilament, triple spine shape

Pile height: 60mm

Dtex: 10000

Gauge: 5/8"

Stitch: 140/m

Density: 8820/m²

Weight: 2515gr/m²



POLITURF LEADER 55140

Synthetic turf for stadiums and mini football courts.

Yarn type: Polyethylene monofilament, diamond shape

Pile height: 55mm

Dtex: 14000

Gauge: 5/8"

Stitch: 140/m

Density: 8820/m²

Weight: 2928gr/m²



ARTIFICIAL GRASS

FOOTBALL FIELDS

POLITURF GRAND 50100

Synthetic turf for stadiums and mini football courts.

Yarn type: Polyethylene monofilament, triple spine shape

Pile height: 50mm

Dtex: 10000

Gauge: 5/8"

Stitch: 140/m

Density: 8820/m²

Weight: 2329gr/m²



POLITURF REGAL 40100

Synthetic turf for stadiums and mini football courts.

Yarn type: Polyethylene monofilament, triple spine shape

Pile height: 40mm

Dtex: 10000

Gauge: 5/8"

Stitch: 140/m

Density: 8820/m²

Weight: 2143gr/m²



TENNIS/PADEL COURTS

POLITURF PRIME 2088

Synthetic turf for tennis courts.

Yarn type: Polyethylene monofilament, fibrillated

Pile height: 20mm

Dtex: 8800

Gauge: 3/8"

Stitch: 200/m

Density: 21000/m²

Weight: 2284gr/m²



POLITURF AMBER 20630

Synthetic turf for tennis courts.

Yarn type: Polyethylene monofilament, fibrillated

Pile height: 20mm

Dtex: 6300

Gauge: 3/8"

Stitch: 200/m

Density: 21000/m²

Weight: 1972gr/m²



ARTIFICIAL GRASS

DECORATIVE - LEISURE AREAS

DECOGRASS SUMMER VIBE 4086

Synthetic turf for landscape projects.

Yarn type: Polyethylene monofilament, C shape
Pile height: 40mm
Dtex: 8600
Gauge: 3/8"
Stitch: 180/m
Density: 18900/m²
Weight: 2519gr/m²



DECOGRASS ELEGANT 35132

Synthetic turf for landscape projects.

Yarn type: Polyethylene monofilament, spine shape
Pile height: 35mm
Dtex: 13200
Gauge: 3/8"
Stitch: 150/m
Density: 15750/m²
Weight: 2968gr/m²



DECOGRASS UNIQUE 3570

Synthetic turf for landscape projects.

Yarn type: Polyethylene monofilament, C shape
Pile height: 35mm
Dtex: 7000
Gauge: 5/16"
Stitch: 110/m
Density: 13860/m²
Weight: 1925gr/m²



DECOGRASS LIBERTY 3055

Synthetic turf for landscape projects.

Yarn type: Polyethylene monofilament + curling
Pile height: 30mm
Dtex: 5500
Gauge: 3/8"
Stitch: 180/m
Density: 18900/m²
Weight: 1906gr/m²



POLYURETHANE GLUES & TAPES

PU GRASS 149 FOR ARTIFICIAL GRASS

Special, polyurethane, two-component adhesive. Used for jointing the rolls of synthetic artificial turfs. It is used in parallel with polyester seaming tapes.

Certified material by ISA SPORT.



Description	Consumption
PU GRASS 149 - Special, polyurethane adhesive for artificial grass.	200-250gr/m ²

PU FLEX 140 FOR PREFABRICATED ROLLS AND SAFETY TILES

Special, polyurethane, two-component adhesive. It is applied on dry, waterproof, smooth concrete surfaces or fine asphalt. Used for the application of **ISOPOL 854** shock-pad or any other prefabricated shock-absorbent roll made of recycled rubber or **EPDM** and also for the application of safety rubber tiles.

Description	Consumption
PU FLEX 140 - Special, polyurethane adhesive for prefabricated rolls and safety rubber tiles.	1kg/m ²

KDF/PF A20 LINOLEUM ADHESIVE

Very low emission dispersion-linoleum adhesive and textile linoleum adhesive for all kind of natural linoleum including sports linoleum.

Description	Consumption
KDF/PF A20 - Linoleum adhesive.	400gr/m ²

KDF/PF A15 CONDUCTIVE CARPET ADHESIVE

Conductive dispersion-based adhesive for floor covering.

Suitable for PVC/Vinyl, linoleum, textile and rubber flooring for hospitals, computer rooms etc. to avoid electrical shocks.

No need to use any conductive primer.

Description	Consumption
KDF/PF A15 - Conductive carpet adhesive.	300gr/m ²

POLYURETHANE GLUES & TAPES

KDF/PF A32 UNIVERSAL ADHESIVE

Universal premium, dispersion-based adhesive for floor coverings for all kind of PVC/Vinyl, linoleum, textile, needle felt punch and rubber flooring (up to 3,5 mm).

Description	Consumption
KDF/PF A32 - Universal adhesive.	300gr/m ²

KDF/PF A065 PARQUET ADHESIVE

Polyurethane, one-component hybrid glue without Isocyanates for multilayer wood flooring and massive planks according to DIN EN 14293.

Can be applied to almost all sublayers without primers.

Description	Consumption
KDF/PF A065 - Parquet adhesive.	1.4 -1.5kg/m ²

SEAMING TAPES

Polyester seaming tapes for jointing the rolls of synthetic turfs with the parallel use of polyurethane glue **PU GRASS 149**.

CERTIFICATES



ISO QUALITY MANAGEMENT ISO ENVIROMENTAL MANAGEMENT POLTRACK SPRAYCOAT



POLTRACK SANDWICH POLTRACK ROLL-SANDWICH POLTRACK FULL-PU



POLTRACK FULL-PU EPDM POLTRACK FULL-PU POLYFLEX AEL-EX

CERTIFICATES



FLEXFLOOR-EX



SPORTFLOOR-EX



SPORTFLOOR-EX FAST



SPORTGROUND-EX



POLTRACK JOGGING TRACK



POLYFLEX PU EX/IN



POLYFLEX PU EX/IN - FIBA



POLYFLEX PU EX/IN-BADMINTON



EPDM 856

CERTIFICATES



SAFEPOL MULTICOLOR



SAFEPOL COLORED



SAFEPOL SANDPROOF




SAFEPOL SANDPROOF



PLAYPREM



POLTRACK EQUINE

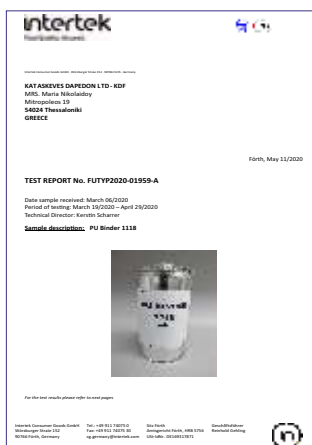

**PAH FREE TEST REPORT
PU BINDER 1118**



**PAH FREE TEST REPORT
PU BINDER 1125AL**



**PAH FREE TEST REPORT
EPDM 856**

CERTIFICATES



PU GRASS 149




**POLTRACK SANDWICH
EN 14877**



**POLTRACK SPRAYCOAT
EN 14877**



COLORFLEX EN 14877

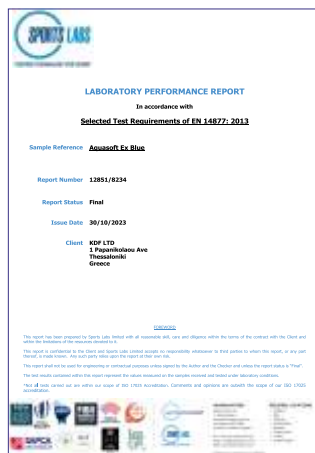

AQUASOFT-EX EN 14877




AQUASOFT-EX ASTM F925-13



**AQUASOFT-EX
ANTIBACTERIAL ACTIVITY**



**AQUASOFT-EX
UVA & WATER PERMEABILITY**

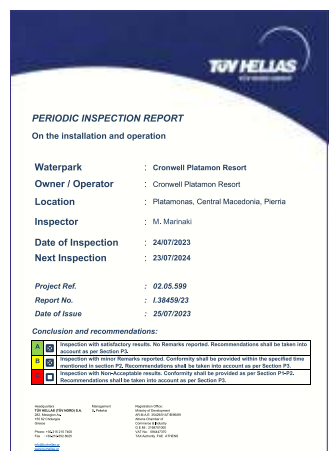

**AQUASOFT-EX
TUV CERTIFICATION**

KDF WORLDWIDE OVER 80 COUNTRIES



ALBANIA
ARGENTINA
ALGERIA
ARMENIA
AUSTRALIA
AUSTRIA
BAHRAIN
BELGIUM
BOSNIA-HERZEGOVINA
BRAZIL
BULGARIA
CAMBODIA
CAMEROON
CANADA
CANARY ISLANDS
CHILE
CHINA
COLOMBIA
COSTA RICA
CROATIA
CUBA
CYPRUS
CZECH REPUBLIC
DOMINICAN REPUBLIC
EGYPT
ESTHONIA
ETHIOPIA

FRANCE
GEORGIA
GREECE
HONG KONG
HUNGARY
INDIA
INDONESIA
IRAN
IRAQ
ISRAEL
ITALY
JORDAN
KAZAKHSTAN
KENYA
KOSOVO
KUWAIT
LATVIA
LEBANON
LIBYA
LITHUANIA
MADAGASCAR
MALAYSIA
MALTA
MEXICO
MONTENEGRO
MOROCCO
NEPAL

NIGERIA
NORTH MACEDONIA
OMAN
PAKISTAN
PERU
PHILIPPINES
PORTUGAL
QATAR
ROMANIA
RUSSIA
SAUDI ARABIA
SERBIA
SINGAPORE
SLOVAKIA
SLOVENIA
SPAIN
SWEDEN
THAILAND
TURKEY
TUNISIA
U.A.E
UKRAINE
URUGUAY
U.S.A
VENEZUELA
VIETNAM
YEMEN

INDICATIVE REFERENCE LIST OF PROJECTS

- OUTDOOR SPORTS FLOORING PROJECT IN MECCA - K.S.A - 60000m², SPORTFLOOR-EX, Acrylic flooring
- RIYADH CITY NORTH PHASE 7A - ABHU DHABI, U.A.E - 80000m², SPORTGROUND-EX, Bicycle track
- RIYADH CITY NORTH PHASE 7B - ABHU DHABI, U.A.E - 60000m², SPORTGROUND-EX, Bicycle track
- CONSTRUCTION OF HARD LANDSCAPING - U.A.E - 60000m², SPORTGROUND-EX, Bicycle track
- RIYADH CITY SOUTH PHASE 1 - ABHU DHABI, U.A.E - 42000m², SPORTGROUND-EX, Bicycle track
- MINISTRY OF EDUCATION, 12 SCHOOLS IN U.A.E (THROUGH VARIOUS CONTRACTORS), 40000m² EPDM Safety flooring
- MULTIPLE RUNNING TRACKS - ALGERIA - 40000 m², POLTRACK SPRAYCOAT, Running track
- AL ESKAN RUNNING TRACK - BURAIDAH, K.S.A - 25000m², POLTRACK SPRAYCOAT, Running track

- NOTHERN CORNICHE WATERFRONT WALKWAY – JAZAN, K.S.A - 22000m², WET-POUR POLYFLEX AEL-EX, Acrylic flooring
- UNIVERSITY OF DAMMAM - KSA - 13000m², FLEXFLOOR-EX, Acrylic flooring
- RUNNING TRACK PROJECT IN IRAQ - 13000 m², POLTRACK SANDWICH, Running track
- KING ABDULLAH BASE AIR DEFENSE - TAIF, KSA - 12600 m², POLTRACK SANDWICH, Running track
- KING FAHD UNIVERSITY OF PETROLEUM AND MINERALS-DHARAN, KSA - 12400m², Rubber outdoor flooring
- "KOSTAS KENTERIS" STADIUM & NATIONAL STADIUM OF MITILINI - MITILINI ISLA, GREECE - 12000m², POLTRACK SANDWICH, Running track
- RUNNING TRACK - K.S.A- 11000 m², POLTRACK SANDWICH, Running track

- GEMS SCHOOL - DUBAI, U.A.E - 10000 m², POLTRACK SANDWICH, Running track
- PASARGRAD WHOLESALE MARKET-IRAN - 10000 m², Decorative flooring
- YAS ISLAND, ABU DHABI, U.A.E - 10000m², SPORTGROUND-EX, Bicycle track
- ANASTASIA KELESIDOU/KONSTANTINOS KARAMANLIS STADIUM - THESSALONIKI, GREECE - 10000m², POLTRACK SANDWICH, Running track, Re-topping project, Indoor & Outdoor running tracks
- KAFTANZOGLIO NATIONAL STADIUM OF THESSALONIKI - GREECE - 9000m², POLTRACK SANDWICH, Running track
- ABHA STADIUM - K.S.A - 9000m², POLTRACK SANDWICH, Running track
- ABU DHABI STADIUM - U.A.E - 9000m², POLITURF LEADER 55140, Artificial grass

- ALEXANDRIA STADIUM - ALEXANDRIA, EGYPT - 8500m², POLTRACK SANDWICH, Running track
- SICHUAN INVESTMENT INTERNATIONAL TENNIS CENTER - CHENGDU CHINA - 8250m², SPORTFLOOR-EX, Acrylic flooring
- MINISTRY OF EDUCATION IN KUWAIT - KUWAIT - 8000m², POLYFLEX PU-IN, Polyurethane flooring
- SALAM STREET & MINA ROAD - ABU DHABI, U.A.E - 8000m², SPORTGROUND-EX, Bicycle track
- KING FAHAD NAVAL BASE - JUBAIL, KSA - 8000m², POLTRACK SANDWICH, Running track
- MUNICIPALITY OF VELVENTO - KOZANI, GREECE - 8000m², POLTRACK SANDWICH, Running track
- PRINCE FAISAL STADIUM IN RIYADH - K.S.A - 8000m², POLTRACK SANDWICH, Running track

- MUNICIPALITY STADIUM TRIKALA - GREECE - 7800m², POLTRACK SPRAYCOAT, Running track
- RUNNING TRACK IN STADIUM IN MOROCCO - 7800m², POLTRACK SANDWICH, Running track
- ABBHA, KSA - 7600m², POLTRACK SANDWICH, Running track
- MUNICIPALITY OF ZENICA - ZENICA, BOSNIA & HERZEGOVINA - 7500m², POLTRACK SPRAYCOAT, Running track
- RUNNING TRACK - KAMIANETS, PODILSKYI, UKRAINE - 7400m², POLTRACK SPRAYCOAT, Running track
- MATO GROSSO STADIUM – BRAZIL - 7260m², POLTRACK SANDWICH, Running track
- NATIONAL STADIUM OF TRIKALA - TRIKALA, GREECE - 7000m², POLTRACKFULL PU, Running track
- TELUK BAYAR MINI OLYMPI STADIUM - INDONESIA - 7000m², POLTRACK SANDWICH, Running track

- ADNOC SCHOOLS - U.A.E - 7000m², SAFEPOL MULTICOLOR, Playground flooring
- ATLAS CENTER-BAM, IRAN - 7000m², Decorative flooring
- RUNNING TRACK - SUDAN - 7000m², POLTRACK SPRAYCOAT, Running track
- POPAYAN UNIVERCITY - COLOMBIA - 6800m², POLTRACK SPRAYCOAT, Running track
- MUNICIPALITY STADIUM ANDROS ISLA, GREECE - 6700m², POLTRACK SANDWICH RETTOPING, Running track
- PANTHRAKIKO STADIUM - KOMOTINI, GREECE - 6700m², POLTRACK SANDWICH
- RUNNING TRACK STADIUM - CRETE, GREECE - 6500 m², POLTRACK SANDWICH, Running track
- PLAYGROUND PROJECT - ABU DHABI, U.A.E - 6500 m², Safety flooring

INDICATIVE REFERENCE LIST OF PROJECTS

- RUNNING TRACK STADIUM - DRAMA, GREECE - 6500 m², POLTRACK SANDWICH, Running track
- SAADIYAT ISLAND - ABHU DHABI, U.A.E - 6500m², SPORTGROUND-EX, Bicycle track
- RUNNING TRACK PROJECT IN MUSCAT, OMAN - 6400 m², POLTRACK SANDWICH, Running track
- KAVALA STADIUM - KAVALA, GREECE - 6300m², POLTRACK SANDWICH, 8-lane Running track
- CHENGDU SPORT UNIVERSITY - CHENGU, CHINA - 6300 m², FLEXFLOOR-EX, Acrylic flooring
- CHILDREN'S PLAY AREA - ALKISH, BENGHAZI, LIBYA - 6250m², SAFEPOL MULTICOLOR
- CORNISH, JEDDAH, K.S.A - 6000m², SPORTGROUND-EX, Bicycle track
- KOHAT SPORTS COMPLEX – PAKISTAN - 6000m², POLTRACK SANDWICH, Running track

- MUNICIPALITY STADIUM-MOLAOI, GREECE - 5800m², POLTRACK SANDWICH, Running track
- MUNICIPALITY STADIUM SOFADES, GREECE - 5800m², POLTRACK SANDWICH, Running track
- MUNICIPALITY STADIUM OF ALIARTOS - ALIARTOS, GREECE - 5700m², POLTRACK SPRAYCOAT, Running track
- ARTIFICIAL GRASS PROJECT - ATHENS, GREECE - 5700m², Artificial grass
- PAPACHARALAMBIO STADIUM - NAFPAKTOS, GREECE - 5650m², POLTRACK SANDWICH, Running track
- AMITY INTERNATIONAL SCHOOL - ABHU DHABI, U.A.E - 5500m², POLTRACK SPRAYCOAT, Running track
- MUNICIPALITY STADIUM LOUTRAKI, GREECE - 5500m², POLTRACK SANDWICH, Running track
- SHUQAIQ WATER AND ELECTRICITY COMPANY - JIZAN, KSA - 5400m², acrylic courts

- TALEEM UPTOWN SCHOOLS - DUBAI, UAE - 5400m², Acrylic sports courts systems
- ZAYED PORT - ABHU DHABI, U.A.E - 5400m², SPORTGROUND-EX, Bicycle track
- SAN FERNANDO DE HENARES - SPAIN - 5300m², POLTRACK SANDWICH, Running track
- LASARTE STADIUM – SPAIN - 5300m², POLTRACK SANDWICH, Running track
- SAUDI AIR FORCE - KSA - 5250m², Acrylic coating elastoturf, running track
- OMAN WATERFRONT - OMAN - 5000m², COLORFLEX-EX, Rubber flooring
- PALAFRUGELL MUNICIPALITY STADIUM – SPAIN – 5000m², POLTRACK SANDWICH, Running track
- SHIV NADER SCHOOL - FARIDABAD, INDIA - 5000m², POLTRACK SANDWICH, Running track

- PUIG, SANTA MARA MUNICIPALITY STADIUM – SPAIN - 5000m², POLTRACK SANDWICH, Running track
- RUNNING TRACK - K.S.A - 5000m², POLTRACK SANDWICH, Running track
- AL HAMRA, RAS AL KHAJMAH, U.A.E - 5000m², SPORTGROUND-EX, Bicycle track
- AIRBASE IN TAIF - KSA - 5000m², Running track
- AMERICAN SCHOOL AL BARSHA - DUBAI - 5000m², POLTRACK SANDWICH, Running track
- MUNICIPALITY STADIUM AMFISSA, GREECE - 5000m², POLTRACK SANDWICH, Running track
- NATIONAL STADIUM OF KALAMPAKA -KALAMPAKA, GREECE - 4900m², POLTRACK SEALED SPRAYCOAT, Running track
- THAILAND STADIUM - 4800m², POLTRACK SANDWICH, Running track

- ARROYOMOLINOS STADIUM – SPAIN - 4800m², POLTRACK SANDWICH, Running track
- UMM GHAFAH CYCLE TRACK - AL AIN, U.A.E - 4700m², SPORTGROUND-EX, Bicycle track
- LYCEE FRANCAIS INTERNATIONAL THEODORE MONOD - SADIYAT, ABU DHABI, U.A.E - 4650m², Art. Grass POLITURF LEADER 55140
- BIG SQUARE & LRT STREET, MASDAR CITY - ABHU DHABI, U.A.E - 4600m², SPORTGROUND-EX, Bicycle track
- MONTORNES DE VALLES - BARCELONA, SPAIN - 4600m², POLTRACK SPRAYCOAT, Running track
- MUNICIPALITY STADIUM OF LEIVADIA - GREECE - 4600m², POLTRACK SANDWICH, Running track
- CHINCA STADIUM - PERU - 4500m², POLTRACK SANDWICH, Running track

- DEPARTMENT OF EDUCATION ASIR REGION - KHAMIS, KSA - 4500m², Running track
- SERVIA STADIUM - KOZANI, GREECE - 4500m², Running track
- STADIUM OF ISLAMIC CITY OF BAWATH IN AL-AZHAR - EGYPT - 4500m², POLTRACK SANDWICH, Running track
- MUNICIPALITY STADIUM OF SOFADES - GREECE - 4500m², POLTRACK SANDWICH, Running track
- AGIOS NIKOLAOS MUNICIPALITY STADIUM – CRETE - 4450m², POLTRACK SANDWICH, Running track
- BURGUILLAS STADIUM IN SEVILLA - SPAIN - 4400m², POLTRACK SPRAYCOAT, Running track
- "POSIDONIO" NATIONAL ATHLETIC CENTER - THESSALONIKI, GREECE - 4300m², Acrylic certified flooring

INDICATIVE REFERENCE LIST OF PROJECTS

- MUNICIPALITY STADIUM OF MESSINI - GREECE - 4300m², POLTRACK SANDWICH, Running track
- MUNICIPAL SPORTS CENTER VELOU-VOHA - PELOPONNISOS, GREECE - 4300m², POLTRACK SANDWICH, Running track
- COMMUNITY COLLEGE - KHAMIS, KSA - 4200m², Running track
- FAYOUM INIVERSITY - EGYPT - 4200m², POLYFLEX PU, Polyurethane flooring
- POLIDEPORTIVO UNIVERSIDAD ALCALA DE HENARES-MADRID, SPAIN-4000m², POLTRACK SPRAYCOAT, Running track
- SPORTS CLUB CENTER GLIFADA - ATHENS, GREECE - 4000m², POLTRACK SPRAYCOAT, Running track
- EMIRATES INTERNATIONAL SCHOOL - DUBAI, U.A.E - 4000m², Safepol System, Playground flooring

- YAS NORTH EMMARATHI COMMUNITY - ABHU DHABI, U.A.E - 4000m², SPORTGROUND-EX, Bicycle track
- MUNICIPALITY STADIUM OF TRIKALA - GREECE - 4000m², POLTRACK SPRAYCOAT, Running track
- RUNNING TRACK PROJECT IN QATAR - 4000m², POLTRACK SPRAYCOAT, Running track
- RUNNING TRACK PROJECT IN SAMOS - GREECE - 4000m², POLTRACK SPRAYCOAT, Running track
- RUNNING TRACK PROJECT IN LIBYA - 4000m², POLTRACK SANDWICH, Running track
- RECONSTRUCTION OF MOROCOCHA STADIUM - PERU - 3850m², POLTRACK SANDWICH, Running track
- HH KHALID BIN BANDAR - RIYADH, KSA - 3800m², Volleyball/basketball rubber courts
- SPORTS FLOORING COMPLEX - ISRAEL - 3700m², SPORTFLOOR-EX, Acrylic flooring

- MUNICIPALITY STADIUM OF AGIA PARASKEVI, GREECE - 3700m², POLTRACK SANDWICH, Running track
- MUNICIPALITY STADIUM OF HALKIDA - EUBOEA, GREECE - 3700m², POLTRACK SANDWICH, Running track
- STADIUM IN FARSALA - GREECE - 3700m², POLTRACK SANDWICH, Running track
- SERRES MUNICIPALITY STADIUM - 3650m², POLTRACK SANDWICH, Running track
- LIRIA MUNICIPALITY STADIUM – VALENCIA, SPAIN – 3600m², POLTRACK SANDWICH, Running track
- RUNNING TRACK- UKRAINE - 3600m², POLTRACK SPRAYCOAT, Running track
- ONIL STADIUM – SPAIN - 3600m², POLTRACK SANDWICH, Running track
- ANATOLIA GOLLEGE - THESSALONIKI, GREECE - 3600m², Running track

- AIMARJAN ASLAND – PARTIAL - 3600m², POLTRACK SANDWICH, Running track
- "ACHILLEAS KARAMANLIS" STADIUM - PROTI SERRON, GREECE - 3600m², POLTRACK SANDWICH, Running track
- MUNICIPALITY SPORYS CENTER - LIVADIA, GREECE - 3600m², POLTRACK SANDWICH, Running track
- RUNNING TRACK - ISRAEL - 3500m², POLTRACK SANDWICH, Running track
- KING ABDULLAH UNIVERSITY TECHNOLOGY - K.S.A - 3500m², POLTRACK SANDWICH, Running track
- RUNNING TRACK PROJECT - EGYPT - 3500m², POLTRACK SPRAYCOAT, Running track
- BICYCLE TRACK PROJECT - GREECE - 3500m², SPORTGROUND-EX, Bicycle track
- MUNICIPALITY OF ALIMOS - ATHENS, GREECE - 3500m, SPORTFLOOR-EX FAST, Acrylic flooring

- BICYCLE TRACK PROJECT - LARISA-TRIKALA, GREECE - 3500m², SPORTGROUND-EX, Bicycle track
- MUNICIPALITY STADIUM OF HOLARGOS, ATHENS- GREECE - 3500m², POLTRACK SANDWICH, Running track
- OUTDOOR SPORTS FLOORING PROJECT IN KILKIS – GREECE - 3400m², POLYFLEX AEL-EX, Acrylic flooring
- UME LEON STADIUM – SPAIN - 3400m², POLTRACK SPRAYCOAT, Running track
- MATRIX SPORTING CLUB - EGYPT - 3400m², POLYFLEX PU-EX, Polyurethane, outdoor flooring
- SRINJDKI STADIUM – MOSTAR, BOSNIA & HERZEGOVINA – 3400m², SPORTGLOOE-EX FAST
- RUNNING TRACK PROJECT - EGYPT - 3400m², POLTRACK SPRAYCOAT, Running track
- PROTI SERRON, GREECE - 3350m², SPORTFLOOR-EX, Acrylic flooring

- TORELLO STADIUM – BARCELONA, SPAIN – 3200m², POLTRACK SPRAYCOAT, Running track
- SPORTS CLUB CENTER KISSAMOS - CRETE, GREECE - 3200m², POLTRACK SANDWICH, Running track
- AL LUSAIL SPORTS CLUB - DOHA, QATAR - 3200m², Jogging track
- SPORTS CLUB CENTER - SERVIA, GREECE - 3200m², POLTRACK SANDWICH, Running track
- STADIUM CENTER - UKRAINE - 3200m², POLTRACK SPRAYCOAT, Running track
- MARCONA STADIUM – ICA, PERU - 3200m², POLTRACK SANDWICH, Running track
- KING KHALID UNIVERSITY - ABHA, KSA - 3100m², Running track
- MUNICIPALITY STADIUM KRESTENA - GREECE - 3100m², POLTRACK SANDWICH, Running track

INDICATIVE REFERENCE LIST OF PROJECTS

- ISTIAIA MUNICIPALITY STADIUM - EVIA ISLA, GREECE - 3100m², POLTRACK SANDWICH, Running Track
- ISLAMIC WORLD GARDEN - SHARJAH, U.A.E - 3000m², SAFEPOL MULTICOLOR, Playground flooring
- AL FAIOUM UNIVERSITY - FAIOUM, EGYPT - 3000m², POLYFLEX PU-IN, Polyurethane flooring
- RUNNING TRACK PROJECT - VELVEDOS MUNICIPALITY, GREECE - 3000m², POLTRACK SANDWICH, Running track
- WADY DEGLA OCTOBER CLUB - CAIRO, EGYPT - 3000m², Acrylic sports courts
- SPORTS CLUB CENTER "PAPAGOU"- ATHENS, GREECE - 3000m², POLTRACK SANDWICH, Running track
- PANORAMA SPORTS COMPLEX - THESSALONIKI, GREECE - 3000m², Running track
- PLAYGROUND FLOORING PROJECT IN NORTHERN GREECE - KILKIS, GREECE - 3000m², SAFEPOL MULTICOLOR

- TENNIS HALL OF THE DEYANG OLYMPIC SPORTS CENTER - DEYANG, CHINA - 3000m² - SPORTFLOOR-EX
- BENHA SPORTS CITY - EGYPT - 3000m² - Acrylic sports courts
- SPORTS COMPLEX IN UKRAINE - 3000m² - Safety flooring, SAFEPOL MULTICOLOR system
- CHENAO TENNIS HALL OF THE CHONGGING OLYMPIC SPORTS CENTER - CHONGGING, CHINA - 3000m² - SPORTFLOOR-EX, Acrylic flooring
- SPLASH PARK FLOORING PROJECT ARABIAN RANCHES – U.A.E - 3000m² – AQUASOFT-EX
- JOGGING TRACK AT WATERFRONT - K.S.A - 3000m² - POLTRACK JOGGING TRACK
- SAHAKAR VIDYA MANDIR SCHOOL, BULDANA – INDIA - 3000m² - POLTRACK SANDWICH, Running track

- RUNNING TRACK PROJECT IN SERBIA - 3000m² - POLTRACK SANDWICH, Running track
- PLAYGROUND FLOORING IN SHARJA - U.A.E - 3000m² - Playground flooring, SAFEPOL MULTICOLOR
- SPORTS FLOORING PROJECT IN YEMEN - 3000m² - SPORTFLOOR-EX, Acrylic flooring
- SPORTS SCHOOL PROJECT - ARTA, GREECE - 3000m, POLYFLEX AEL-EX, Acrylic flooring
- RECREATIONAL AREA/SAFETY FLOORING – NORTH MACEDONIA - 3000m² - POLTRACK SPRAYCOAT, Running track
- ALIMOS STADIUM - ALIMOS, GREECE - 2850m² - POLTRACK SPRAYCOAT, Running track
- INDIAN ARMY - SAGAR, INDIA - 2800m²- Acrylic sports courts
- COLEGIO INTERNACIONAL DE LA SERENA - CHILE - 2800m² - POLTRACK SANDWICH, Running track

- OUTDOOR BASKETBALL COURT PROJECT IN PROTI SERRON – GREECE - 2750m² - SPORTFLOOR-EX, Acrylic flooring
- ALL SAINTS SCHOOL - MUMBAI, INDIA - 2700m² - PU outdoor sports flooring and running track
- INDIAN INSTITUTE OF SCIENCE EDUCATION AND RESEARCH- BHOPAL, INDIA-2700m²-Acrylic sports courts
- RESORT IN RED SEA - EGYPT - 2700m², FLEXFLOOR-EX, Acrylic flooring
- OUR OWN GOLF SCHOOL - 2700m² - POLTRACK SPRAYCOAT, Running track
- BAILE FIGA, BISTRITA NASAUD - ROMANIA - 2700m² - Safety flooring, SAFEPOL MULTICOLOR system
- STADIUM STUDENTSKA, SPORTS COMPLEX - VARNA, BULGARIA - 2700m² - SPORTFLOOR-EX, Acrylic flooring
- RAKS PALLIKOODAM SCHOOL - INDIA - 2600m², FLEXFLOOR-EX, Acrylic flooring

- DPS GUNTUR SITE, NEW DELHI INDIA - 2600m² - SPORTFLOOR-EX, Acrylic flooring
- MUNICIPAL STADIUM OF PREVEZA - GREECE - 2600m² - POLTRACK SANDWICH, Running track
- HIGH SCHOOL COMPLEX - ATTIKA DISTRICT - 2500m² - SPORTFLOOR-EX FAST, Acrylic flooring
- KURNISH AL KHOBAR - K.S.A - 2500m², COLORFLEX-EX, Rubber flooring
- AL RAYAN, QATAR - 2500m² - POLTRACK SANDWICH, Running track
- MUNICIPALITY PARK OF TRIKALA - GREECE - 2500m² - Running track, POLTRACK FULL-PU
- OUTDOOR SPORTS VENUE - VARNA, BULGARIA - 2500m² - Acrylic, ITF classified, 8 layers system
- RETOPPING CEE GALICIA STADIUM – SPAIN – 2450m² - POLTRACK SPRAYCOAT, Running track

- ALHOSN SPORTS COMPLEX - 2400m² - POLTRACK SANDWICH, Running track
- 1st HIGH SCHOOL COMPLEX IN KILKIS – GREECE - 2400m² - SPORTFLOOR-EX, Acrylic flooring
- PROJECT BELICA - CROATIA - 2300m² - POLTRACK SPRAYCOAT, Running track
- MUNICIPAL SPORTS CENTER PAVLOU MELA - THESSALONIKI, GREECE - 2300m² - SPORTFLOOR-EX, Acrylic flooring
- MUNICIPALITY STADIUM OF DOXATO - GREECE - 2300m² - POLTRACK SANDWICH, Running track
- TORRES DE COTILLAS - SPAIN - 2300m² - POLTRACK SPRAYCOAT, Running track
- WADY DEGLA EL NAKHIL CLUB - CAIRO, EGYPT - 2260m², POLYFLEX AEL-EX, Acrylic flooring

INDICATIVE REFERENCE LIST OF PROJECTS

- OUTDOOR SPORTS FLOORING PROJECT PALANPUR – GUJARAT, INDIA - 2250m²- SPORTFLOOR-EX, Acrylic flooring
- SPORTS FLOORING PROJECT IN BULGARIA - 2200m² - SPORTFLOOR-EX, Acrylic flooring
- LULU SCHOOL - ABU DHABI, U.A.E - 2200m² - SAFEPOL MULTICOLOR
- MUSKIZ MUNICIPALITY STADIUM – SPAIN - 2100m² - POLTRACK SANDWICH, Running track
- TEACHERS COLLEGE - ABHA, KSA - 2050m² - Running track
- MUSAB BIN OMAIR BOYS SCHOOL - BIN OMRAN, QATAR - 2050m² - PU outdoor sport flooring
- BURAIRAT SCHOOL - RAK, UAE - 2000m² - Running track
- SPORTS CENTRE OF GERAKAS - ATHENS, GREECE - 2000m² - SPORTFLOOR-EX, Acrylic flooring

- HADAYEK ALAHRAM CLUB - GIZA, EGYPT - 2000m², WET-POUR POLYFLEX PU-EX, Polyurethane, outdoor flooring
- JP, ADA CIGANLIJA - BELGRADE, SERBIA - 2000m² - SPORTFLOOR-EX, Acrylic flooring
- YASMINA SCHOOL - ABUDHABI, U.A.E - 2000m² - Playground flooring, SAFEPOL MULTICOLOR
- SCHOOL COMPLEX IN NAXOS ISLAND - GREECE - 2000m² - SPORTFLOOR-EX, Acrylic flooring
- MUNICIPALITY STADIUM OF MALIA, CRETE - GREECE - 2000m² - POLTRACK SPRAYCOAT, Running track
- AL SAILIYA BOYS SCHOOL - AL SAILIYA, QATAR - 2000m² - Polyurethane, outdoor sport flooring
- KING KHALID UNIVERSITY - ABHA, KSA - 2000m² - Volleyball/basketball rubber courts
- HH KHALID BIN BANDAR - RIYADH, KSA - 2000m² - Volleyball/basketball rubber courts

- MUNICIPALITY STADIUM OF DRAMA - GREECE - 2000m² - POLTRACK SANDWICH, Running track
- SCHOOL COPMLEX OUTDOOR PROJECT IN BULGARIA - 2000m² - POLTRACK SANDWICH, Running track
- RAWDA RASHEED PRIMARY SCHOOL FOR BOYS - 2000m² - Outdoor sports flooring
- DEIRA INTERNATIONAL SCHOOL - DUBAI, U.A.E - 2000m², POLYFLEX PU-IN, Polyurethane flooring
- JOGGING TRACK PROJECT IN AL HAMRIYA– U.A.E - 2000m² - POLTRACK JOGGING TRACK
- DAMIETTA GOVERNMENT - EGYPT - 2000m² - POLTRACK SPRAYCOAT, Running track
- WALKWAY - TRIPOLI, LIBYA - 2000m², COLORFLEX-EX, Rubber flooring
- MUNICIPAL STADIUM OF GIANNITSA-GIANNITSA, GREECE-2000m² - POLTRACK SANDWICH, Running track

- AL WAKAIR BOYS SCHOOL - AL WAKRAH, QATAR - 1950m² - Polyurethane, outdoor sport flooring
- THE LAKE DISTRICT - PUNE, INDIA - 1950m²- Acrylic sports courts
- PRESIDENTIAL GUARD COMMAND MAHAWI - ABU DHABI, UAE - 1900m² - Football court
- GEMS CAMBRIDGE INTERNATIONAL SCHOOL - HOSHIYARPUR, INDIA - 1900m², FLEXFLOOR-EX, Acrylic flooring
- MUNICIPALITY STADIUM KARPENISI, GREECE - 1900m² - POLTRACK SANDWICH, Running track
- UNITED (SABIC) SPORTS CLUB - 1900m² - Rubber flooring
- OUTDOOR SPORTS FLOORING PROJECT - PAKISTAN - 1900m², WET-POUR POLYFLEX AEL-EX, Acrylic flooring
- SHOOLS MINISTRY OF EDUCATION - KHAMIS, KSA - 1800m² - Rubber flooring

- AL MAJAD AMPHITHEATER - SHARJA, UAE - 1800m² - POLTRACK JOGGING TRACK
- MULTIPURPOSE COURTS - KEFALONIA, GREECE - 1800m² - SPORTFLOOR-EX, Acrylic flooring
- QASSIM UNIVERSITY - KSA - 1800m² - Polyurethane sports flooring
- MODERN ENGLISH SCHOOL - EGYPT - 1785m² - POLTRACK SPRAYCOAT, Running track
- AL QADSIYA MODEL INDEPENDENT SCHOOL - ALWAAB, QATAR - 1770m² - PU outdoor sport flooring
- MUNICIPAL SPORTS CENTER IN KIATO - GREECE - 1750m² - POLTRACK SPRAYCOAT, running track & SPORTFLOOR-EX,
- IKNS SCHOOL - BAHRAIN - 1700m² - Playground flooring, SAFEPOL MULTICOLOR system
- RECREATIONAL PARK – TRIPOLI, LIBYA - 1700m², COLORFLEX-EX, Rubber flooring

- AL WAHDA SPORT ACADEMY CLUB - ABU DHABI, UAE - 1700m² - Acrylic sports system
- MUNICIPALITY STADIUM OF AGIA VARVARA - GREECE - 1700m² - POLTRACK SPRAYCOAT, Running track
- MULTIPURPOSE ACRYLIC COURTS - BAHRAIN - 1700 m² - SPORTFLOOR-EX, Acrylic flooring
- ALSARH SCHOOLS OF CIVIL - RIYADH, KSA - 1650m² - PU glue/Soccer field
- PLAYGROUND FLOORING PROJECT IN QATAR - 1650m² - SAFEPOL MULTICOLOR system
- ESTADIO PROVINCIAL DE SANDIA - PUNO, PERU - 1650m² - POLTRACK SANDWICH, Running track
- RECREATIONAL COMPLEX – SOFIA, BULGARIA - 1650m² - POLTRACK SPRAYCOAT, Running track

INDICATIVE REFERENCE LIST OF PROJECTS

- GD GOENKA PUBLIC SCHOLL - PURNIA, INDIA - 1630m²- Acrylic sport1600 m² - s courts
- CIVIL DEFENCE TRAINING CENTER, EASTERN PROVINCE - K.S.A - 1600m² - POLTRACK SPRAYCOAT, Running track
- SPA RESORT DERENIVSKUPIA KI - UZHGOROD, UKRAINE - 1600m², FLEXFLOOR-EX, Acrylic flooring
- CIVIL DEFENCE TRAINING CENTER, EASTERN PROVINCE - K.S.A - 1600m², POLYFLEX PU-IN, Polyurethane flooring
- IISER, INDIAN INSTITUTE OF SCIENCE EDUCATION AND RESEARCH - BHOPAL, INDIA - 1600m², FLEXFLOOR-EX
- EFKARPIA MUNICIPALITY - THESSALONIKI, GREECE - 1600m² - SPORTFLOOR-EX, Acrylic flooring
- GRACANICA SPORTS CENTRE - KOSOVO - 1600m² - Running Track, POLTRACK PRAYCOAT system
- 3 OUTDOOR BASKETBALL COURTS - RHODES ISL GREECE - 1600m², FLEXFLOOR-EX, Acrylic flooring

- PROJECT CAZIN - BOSNIA & HERZEGOVINA - 1600m² - POLTRACK PRAYCOAT, Running track
- BARAL SPORTS ARENA – CANTT, MANGLA, PAKISTAN - 1600m² - POLTRACK SEALED SPRAYCOAT, Running track
- MAHARANA PRATAP UTTARAKHAND FOR THE INDIAN NATIONAL TENNIS GAMES – INDIA - 1600m² - FLEXFLOOR-EX
- THE MILITARY HOSPITAL - RIYADH, KSA - 1560m² - Volleyball/basketball rubber courts-PU sports flooring
- STADIUM IN BAJRAM CURRI - TROPOJA, ALBANIA - 1550m² - POLTRACK SPRAYCOAT, Running track
- SCHOOL SPORTS COMPLEX IN POLIGIROS - GREECE - 1550m² - SPORTFLOOR-EX, Acrylic flooring
- AL FORSHAN SPORTS CENTRE - ABU DHABI, U.A.E - 1500m² - SMARTFLOOR-EX, Acrylic flooring
- INDUSTRIAL FLOORING - BULGARIA - 1500m² - POLEPOX COAT 814, Epoxy flooring

- SCHOOL IN AL WAKRA CITY - DOHA, QATAR - 1500 m² - SAFEPPOL MULTICOLOR, Playground flooring
- REAL SCHOOL SHAH ALAM - MALAYSIA - 1500m² - POLTRACK SPRAYCOAT, Running track
- IRAQ ARMY CAMP - IRAQ - 1500m² - Acrylic flooring in 2,2mm
- OLYMPIC CITY MULTIPROJECTS – EGYPT - 1500m², POLYFLEX AEL-EX, Acrylic flooring & POLTRACK SPRAYCOAT,
- PROJECT GREEN LAND - DUBAI, UAE - 1500m² - POLTRACK JOGGING TRACK, Jogging track
- UP TOWN SCHOOL - 1500m² - POLTRACK SPRAYCOAT, Running track
- 3rd MIDDLE SCHOOL COMPLEX IN KILKIS – GREECE - 1460m² - SPORTFLOOR-EX, Acrylic flooring
- INDIAN AIR FORCE - ALLAHABAD, INDIA - 1450m² - Acrylic sports courts

- SCHOOL COMPLEX IN AGIOI ANARGYROI - ATHENS - GREECE - 1450m² - Acrylic sports courts
- OUTDOOR SPORTS COURT COMPLEX - INDIA -1400m², WETPOUR POLYFLEX PU-EX, Polyurethane flooring
- STREET-BALL FLOORING PROJECTS IN KOSOVO - 1400m² - SPORTFLOOR-EX, Acrylic flooring
- DUBAI MODERN HIGH SCHOOL - DUBAI, UAE - 1375m² - Acrylic sports courts
- PROJECT ECOGREEN - DUBAI, UAE - 1350m² - POLTRACK JOGGING TRACK, Jogging track
- SAVA BASELINE ACADEMY - MALTA - 1350m² - SMARTFLOOR-EX, Acrylic flooring
- PROTI SERRON, GREECE - 1350m² - TENNIS COURT with art. grass, POLITURF AMBER 20630
- TENNIS CLUB CENTER IN LJUBLJANA - SLOVENIA - 1350m² - SPORTFLOOR-EX, Acrylic flooring

- SPORTS FLOORING PROJECT - BANSKO, BULGARIA - 1350m² - Acrylic sports courts
- OUTDOOR ACRYLIC SPORTS FLOORING PROJECT – BULGARIA - 1350m² - FELXFLOOR-EX
- "10" NATIONAL TV STATION - KOSOVO - 1300m² - Outdoor, acrylic flooring, WET POUR POYFLEX AEL-EX
- POLICE COMPLEX BARRACKS NIZWA - OMAN- 1300m² - COLORFELX, PU SPORTS FLOORING
- POLICE COMPLEX BARRACKS AL AJAIZ - OMAN - 1300m² - COLORFELX, PU SPORTS FLOORING
- POLICE COMPLEX BARRACKS KATMATMILAH SITE - OMAN- 1300m² - COLORFELX, PU SPORTS FLOORING
- POLICE COMPLEX BARRACKS SUWAIQ - OMAN - 1300m² - COLORFELX, PU SPORTS FLOORING
- POLICE COMPLEX BARRACKS AL KAMIL - OMAN - 1300m² - COLORFELX, PU SPORTS FLOORING

- PLAYGROUND FLOORING - BAHRAIN - 1300m² - Safepol system
- POLICE COMPLEX BARRACKS SHINAS - OMAN - 1300m² - COLORFELX, PU SPORTS FLOORING
- POLICE COMPLEX BARRACKS BHALA - OMAN - 1300m² - COLORFELX, PU SPORTS FLOORING
- POLICE COMPLEX BARRACKS MUDHAIBI - OMAN - 1300m² - COLORFELX, PU SPORTS FLOORING
- POLICE COMPLEX BARRACKS THUMRAIT - OMAN - 1300m² - COLORFELX, PU SPORTS FLOORING
- BASKETBALL COURTS PROJECT - NEAPOLI, THESSALONIKI, GREECE - 1300m² - SPORTFLOOR-EX, Acrylic flooring
- POLICE COMPLEX BARRACKS AL KHOUDH - OMAN - 1300m² - COLORFELX, PU SPORTS FLOORING

INDICATIVE REFERENCE LIST OF PROJECTS

- POLICE COMPLEX BARRACKS MAHDAH - OMAN - 1300m² - COLORFELX, PU SPORTS FLOORING
- POLICE COMPLEX BARRACKS BID BID - OMAN - 1300m² - COLORFELX, PU SPORTS FLOORING
- JOGGING TRACK PROJECT IN AL HAMRA – U.A.E – 1300m² - POLTRACK JOGGING TRACK
- POLICE COMPLEX BARRACKS AL KHABOORA - OMAN - 1300m² - COLORFELX, PU SPORTS FLOORING
- POLICE COMPLEX BARRACKS DHANK - OMAN - 1300m² - COLORFELX, PU SPORTS FLOORING
- POLICE COMPLEX BARRACKS HAFEET - OMAN - 1300m² - COLORFELX, PU SPORTS FLOORING
- POLICE COMPLEX BARRACKS AUQAD - OMAN - 1300m² - COLORFELX, PU SPORTS FLOORING
- POLICE COMPLEX BARRACKS SUMAIL - OMAN - 1300m² - COLORFELX, PU SPORTS FLOORING

- MATRIX SPORTING CLUB - EGYPT - 1300m², FLEXFLOOR-EX, Acrylic flooring
- OUTDOOR SPORTS VENUE - KOSOVO - 1300m² - POLTRACK SPRAYCOAT, Running track
- MUNICIPALITY SPORTS CENTRE SYKIES, THESSALONIKI - GREECE - 1300m² - POLTRACK SANDWICH
- PRISTINA SPORTS CENTER - KOSOVO - 1300m² - POLTRACK SPRAYCOAT, Running track
- SPORTS HALL IBRI - MUSCAT, OMAN - 1300m², POLYFLEX PU-IN, Polyurethane flooring
- PRIVATE RESIDENTIAL COMPLEX – PRISTINA, KOSOVO - 1300m², FLEXFLOOR-EX, Acrylic flooring
- IK TENNIS ACADEMY - MALTA - 1300m² - SPORTFLOOR-EX, Acrylic flooring
- ALHALAFI BREAK - RIYADH, KSA - 1276m² - Rubber flooring

- CHILDREN'S PLAY AREA - ALKISH, BENGHAZI, LIBYA - 1270m² - SAFEPOL MULTICOLOR
- DELHI PUBLIC SCHOOL - ETAWAH, INDIA - 1250m², FLEXFLOOR-EX, Acrylic flooring
- SCHOOL SPORTS PROJECT - ARTASHAT, ARMENIA - 1250m²- COLORLFEX-EX
- GI-DHOFAR BEACH RESORT & SPA - OMAN - 1225m², COLORFLEX-EX, Rubber flooring & PU sport flooring
- RLS BASIC EDUCATION SCHOOL SOHAR - OMAN - 1225m², COLORFLEX-EX, Rubber flooring & PU sport flooring
- MIXED BASIC EDUCATION SCHOOL AL QABIL - OMAN - 1225m², COLORFLEX-EX, Rubber flooring & PU sport flooring
- BOYS BASIC EDUCATION SCHOOL BARKHA - OMAN - 1225m², COLORFLEX-EX, Rubber flooring & PU sport flooring
- GIRLS BASIC EDUCATION SCHOOL MUDHAIBI - OMAN - 1225m², COLORFLEX-EX, Rubber flooring & PU sport flooring

- MIXED BASIC EDUCATION SCHOOL AL AMERAT - OMAN - 1225m², COLORFLEX-EX, Rubber flooring & PU sport flooring
- UMSALAMA GIRLS SCHOOL - AL RAYYAN, QATAR - 1200m² - Polyurethane, outdoor sport flooring
- SHERATON PARK - DOHA, QATAR - 1200m² - Playground flooring
- ALDRA PROJECT PLAYGROUND FLOORING – U.A.E - 1200m² - SAFEPOL MULTICOLOR
- TENNIS COURTS IN SPORTS COMPLEX - SINGAPORE - 1200m² - SPORTFLOOR-EX FAST, Acrylic flooring
- RAWDA BIN JASSIM SCHOOL - AL AZIZIYAH, QATAR - 1200m² - Polyurethane, outdoor sport flooring
- GEMS WESTMINISTER SCHOOL - DUBAI, U.A.E - 1200m² - Acrylic sports courts
- SILVER SPORTS CLUB - INDIA - 1200m²- Acrylic sports courts

- OUR OWN SCHOOL - SHARJA, U.A.E - 1200m² - Acrylic sports courts
- SHARJAH FOOTBALL CLUB - SHARJAH, UAE - 1200m² - Polyurethane basketball courts
- SHERATON PARK - DOHA, QATAR - 1200m² - Playground flooring
- CHILE RUNNING TRACK PROJECT - 1200m² - POLTRACK SPRAYCOAT, Running track
- EGYPT RUNING TRACK PROJECT - 1200m² - POLTRACK SPRAYCOAT, Running track
- EGYPT RUNING TRACK PROJECT - 1200m² - POLTRACK SANDWICH, Running track
- ALIGARH MUSLIM UNIVERSITY - ALIGARH, INDIA - 1200m², FLEXFLOOR-EX, Acrylic flooring
- SUMMER RESORT, KIDS Paly AREA - CHALKIDIKI, GREECE - 1200m² - Playground flooring, SAFEPOL

- SPORTS FLOOR PROJECT IN PAKISTAN - 1200m², POLYFLEX AEL-EX, Acrylic flooring
- SCHOOL COMPLEX - ZAKINTHOS, GREECE - 1200m² - SPORTFLOOR FAST, Acrylic flooring
- FOOTBALL COURT WITH ARTIFICIAL GRASS - BEIRUT, LEBANON - 1200m² - 60mm Pile height

INDICATIVE REFERENCE LIST OF PROJECTS

- SCHOOL COMPLEXES IN PTOLEMAIDA MUNICIPALITY, GREECE - 1200m² - SPORTFLOOR-EX, Acrylic flooring
- 2nd HIGH SCHOOL IN KILIS – GREECE - 1195m², COLORFLEX-EX, Rubber flooring
- SYMBIOSIS COLLEGE - INDIA - 1180m²- Acrylic sports courts
- SPORTS PROJECT IN EGYPT - 1170m², POLYFLEX AEL-EX, Acrylic flooring
- PROFESSOR ABDULAZIZ ANQARI - RIYADH, KSA -1150m² - PU glue/Soccer field
- SPORTS CENTER IN PRISTINA - KOSOVO - 1150m² - POLTRACK SPRAYCOAT, Running track
- ACRYLIC, OUTDOOR SPORTS FLOORING PROJECT - KARACHI, PAKISTAN -1150m², FLEXFLOOR-EX, Acrylic flooring
- AL SAQID ISLAMIC ENGLISH SHCOLL-DUBAI, UAE-1100m², WET-POUR POLYFLEX AEL-EX, Acrylic flooring

- REAL SCHOOL HULU LANGAT - MALAYSIA - 1100m² - POLTRACK SPRAYCOAT, Running track
- UTIEL MUNICIPALITY STADIUM – VALENCIA, SPAIN – 1000m² - POLTRACK SPRAYCOAT, Running track
- MAADI BRITISH SCHOOL- EGYPT - 1100m², COLORFLEX-EX, Rubber flooring
- OUTDOOR SPORTS PROJECT IN FOCSANI REGION - ROMANIA - 1100m² - POLTRACK SPRAYCOAT, Running track
- CENTRAL SQUARE OF MUNICIPALITY OF THERMI - THESSALONIKI, GREECE - 1100m², Decorative flooring MARMOR FLOOR system
- GREEK TECHNOLOGICAL EDUCATIONAL INSTITUTE OF THESSALIA - GREECE - 1100m², POLTRACK SANDWICH
- NANSHA INTERNATIONAL TENNIS CENTER - GUANGZHOU, CHINA - 1000m² - SPORTFLOOR-EX, Acrylic flooring
- KORYDALLOS DISTRICT - ATHENS, GREECE - 1100m², FLEXFLOOR-EX, Acrylic flooring

- MARSIA PARK (1st PROJECT) – RIYADH, K.S.A - 1100m², COLORFLEX-EX, Rubber flooring
- CIENEGUILLA - PERU - 1100m², POLYFLEX PU-EX, Polyurethane, outdoor flooring
- FIRST POINT SCHOOLS - DUBAI, UAE1100m² - Acrylic sports courts
- OUTDDOR SPORTS FLOORING PROJECT-ARTA, GREECE-1100m², POLYFLEX AEL-EX & SPORTFLOOR-EX
- TUMBES - PERU - 1100m², POLYFLEX PU-IN, Polyurethane flooring
- MULTIPURPOSE COURTS IN AL KHAFJI - K.S.A - 1100m², WET-POUR POLYFLEX AEL-EX, Acrylic flooring
- DUBAI AMERICAN ACADEMY - DUBAI, UAE - 1080m² - Acrylic sports court
- PRELUDE PUBLIC SCHOOL - AGRA, INDIA - 1070m²- Acrylic sports courts

- KAFR SAWM HALL – IRBID, JORDAN - 1055m², POLYFLEX PU-IN, Polyurethane flooring
- ALMGBAL BREAK - RIYADH, KSA - 1050m² - Rubber playground
- PLAYGROUND MULTI-PROJECT IN HUANCANELICA - PERU - 1050m² - SAFEPOL MULTICOLOR
- BANIYAS CLUB AND AL AIN ENGLISH SPEAKING SCHOOL - ABU DHABI, UAE - 1000m² - Acrylic flooring
- PICKLEBALL COURTS – VARNA, BULGARIA - 1000m² - SPORTFLOOR-EX, Acrylic flooring
- WADY DEGLA LOTUS PROJECT - CAIRO, EGYPT - 1000 m², WET-POUR POLYFLEX AEL-EX, Acrylic flooring
- SPORTS CENTER – COSTA RICA - 1000 m² - POLTRACK SPRAYCOAT, Running track
- GRAVA SCHOOL COMPLEX - ATHENS, GREECE - 1000 m² - POLTRACK SANDWICH RETTOPING

- GLOBAL INDIAN INTERNATIONAL SCHOOL - SINGAPORE - 1000 m² - POLTRACK SANDWICH, Running track
- NITEROI STADIUM - RIO DE JANEIRO, BRAZIL - 1000 m² - POLTRACK SANDWICH, Running track
- SPLASH PARK FLOORING - BELGIUM - 1000 m² - AQUASOFT-EX, Splash Park flooring
- SPORTS VENUE – VARNA, BULGARIA - 1000 m² - SPORTFLOOR-EX, Acrylic flooring
- INDIAN AIR FORCE - VARANASI, INDIA - 1000m² - Acrylic sports courts
- MULTIPURPOSE COURT - K.S.A - 1000m² - WET-POUR POLEFLEX AEL-EX
- GARDENIA RESIDENTS - DUBAI, U.A.E - 1000 m² - SAFEPOL MULTICOLOR, Playground flooring
- RUNNING TRACK PATHWAY IN LIBYA - 1000 m² - POLTRACK SANDWICH, Running track

- JINDAL UNIVERSITY - SONIPAT, HARYANA, INDIA - 1000m², WET-POUR POLYFLEX PU-EX, Polyurethane flooring
- MINISTRY OF EDUCATION - DAMMAM, KSA - 1000 m² - PU indoor multipurpose sports flooring

INDICATIVE REFERENCE LIST OF PROJECTS

- RECREATIONAL PARK – KOSOVO - 1000 m² - POLTRACK SPRAYCOAT, Running track
- SHEIKH OBEID MAKTHOUM PALACE - 1000m² - Outdoor polyurethane flooring
- PAVILHAO POLIDESPORTIVO - SAO JOAO DA PESQUEIRA - PORTUGAL - 1000 m², POLYFLEX PU-IN
- INDIAN AIR FORCE - AGRA, INDIA - 1000m² - Acrylic sports courts
- INDONESIA - 1000 m² - PU indoor multipurpose sports flooring
- BANI WALID CITY, LIBYA - 1000 m², POLYFLEX PU-IN, Polyurethane flooring
- FOOTBALL PITCH PROJECT IN CHALKIDIKI - GREECE-1000 m² Artificial Grass POLITURF TRIUMPH 60100
- INDIAN AIR FORCE - LUCKNOW, INDIA - 1000m² - Acrylic sports courts

- ALNABBAGH STABLE – ALAIN, U.A.E - 1000m² - POLTRACK EQUESTRIAN SYSTEM
- MULTIPURPOSE POLYURETHANE INDOOR COURTS – NORTH MACEDONIA - 1000m², POLYFLEX PU-IN
- SODIC PROJECT - EGYPT - 1000m², COLORFLEX-EX, Rubber flooring
- MUNICIPALITY STADIUM OF LARISA "ALKAZAR"- GREECE -1000m² - POLTRACK SANDWICH RETTOPING
- ALKHADAR CLUB HALL - AL BAYDA CITY, LIBYA - 1000 m²
- VARIOUS PLAYGROUND PROJECTS IN ROYL DUBAI SCHOOL - 1000m² - SAFEPOL MULTICOLOR
- INDIAN AIR FORCE - VARANASI, INDIA - 1000m² - Acrylic sports courts
- INTERNATIONAL SCHOOL OF CREATIVE SCIENCE - SHARJAH, U.A.E - 1000m² - Safepol System

- INDIAN AIR FORCE - BIHTA, INDIA - 1000m² - Acrylic sports courts
- INDIAN AIR FORCE - DARBHANGA, INDIA - 1000m² - Acrylic sports courts
- AL AIN INDIAN SCHOOL - AL AIN, UAE - 1000m² - Football court
- INDOOR STADIUM IN PREVEZA - GREECE - 1000m² - POLTRACK SANDWICH, Running track
- GREEK AIR FORCE ACADEMY - TATOI, ATHENS, GREECE - 1000m², POLYFLEX PU-IN, Polyurethane flooring
- DUBAI SCHOLRAS PRIVATE SCHOOL - DUBAI, U.A.E - 1000m² - Acrylic flooring in 2,2mm
- OBOOR SPORTS CLUB - EGYPT - 1000m² - Acrylic flooring
- CAMANA - PERU - 1000m² - POLYFLEX PU-IN, Polyurethane flooring

- MINISTRY OF EDUCATION INDOOR SPORTS PROJECT IN OMAN - 1000m² - POLYFLEX PU-IN
- AL-JUMAYL CITY, LIBYA - 1000 m² - POLYFLEX PU-IN, Polyurethane flooring
- VIT AP CAMPUS, AMARAVANTHI, VIJAYAWADA, ANDHRA PRADESH - INDIA - 985m² - POLYFLEX PU-IN,
- MONARCH INTERNATIONAL SCHOOL - 950m², FLEXFLOOR-EX, Acrylic flooring
- OUTDOOR ACRYLIC COURT - BENGHAZI, LIBYA - 950m² - SPORTFLOOR-EX, Acrylic flooring
- FOOTBALL COURT - LIMASSOL, CYPRUS - 950m² - POLITURF IMPERIAL 50140, Artificial grass
- MULTISPORT FIELD GADIME – LIPJAN, KOSOVO - 950m² - POLTRACK SPRAYCOAT, Running track
- COMMUNITY COLLEGE - KHAMIS, KSA - 940 m² - Polyurethane indoor multipurpose sports flooring

- OUTDOOR ACRYLIC COURT - BENGHAZI, LIBYA - 930m² - SPORTFLOOR-EX, Acrylic flooring
- GEMS METROPOLE SCHOOL - DUBAI, U.A.E - 900 m² - Playground flooring
- PLAYGROUND FLOORING IN KHARKIV-2 - UKRAINE - 900m² - SAFEPOL MULTICOLOR system
- MINISTRY OF EDUCATION - ABHA, KSA - 900 m² - Polyurethane indoor multipurpose sports flooring
- OUTDOOR MULTIPURPOSE COURT – ZAGREB, CROATIA - 900m² - POLTRACK SPRAYCOAT, Running track
- BAB AL SHAMS SPA HOTEL - DUBAI, UAE - 900m² - Football court
- ABANCAY SPORTS VENUE – PERU - 900m², POLYFLEX PU-EX, Polyurethane, outdoor flooring
- ADNOC SCHOOLS – U.A.E - 900m² - SAFEPOL MULTICOLOR

- STREET BALL COURTS - BOSNIA & HERZEGOVINA - 880m² - POLTRACK SPRAYCOAT, Running track
- CAIRO FESTIVAL CITY ORIANA PROJECT - EGYPT - 855m² - Playground flooring, SAFEPOL MULTICOLOR
- INDIAN NAVY - KOCHI, INDIA - 850m², FLEXFLOOR-EX, Acrylic flooring

INDICATIVE REFERENCE LIST OF PROJECTS

-PARCONA SPORTS CENTER - PERU - 850m², POLYFLEX PU-EX, Polyurethane, outdoor flooring
 -SCHOOL SPORTS COMPLEX - K.S.A - 850m², POLYFLEX AEL-EX, Acrylic flooring
 -CHICAUMA PROJECT - CHILE - 850m² - SAFEPOL MULTICOLOR
 -MALESNICA ELEMENTARY SCHOOL – ZAGREB, CROATIA - 850m² - POLTRACK SPRAYCOAT, Running track
 -JUBAIL - K.S.A - 850m², WET-POUR POLYFLEX AEL-EX, Acrylic flooring
 -PLAYGROUND PROJECT IN KILKIS - GREECE - 850m² - Playground flooring, SAFEPOL MULTICOLOR
 -1st HIGH SCHOOL COMPLEX IN KILKIS – GREECE - 840m² - SPORTFLOOR-EX, Acrylic flooring
 -GALGOTIAS UNIVERSITY - NOIDA, INDIA - 830m², FLEXFLOOR-EX, Acrylic flooring

-KING KHALID UNIVERSITY - ABHA, KSA - 820 m² - Polyurethane indoor multipurpose sports flooring
 -SCHOOL COMPLEX - KOSOVO - 820 m² - SPORTFLOOR-EX, Acrylic flooring
 -YLL MORINA SCHOOL - GJAKOVA, KOSOVO - 810m² - POLTRACK SPRAYCOAT, Outdoor sports flooring
 -GYMNASIUM IN OBERHOFFEN - ALSACE, FRANCE - 800m², POLYFLEX PU-IN, Polyurethane flooring
 -SPORTS CENTER ANTIRIO - GREECE - 800m² - POLTRACK SPRAYCOAT, Running track
 -JINDAL UNIVERSITY - SONIPAT, HARYANA, INDIA - 800m² - POLTRACK JOGGING TRACK
 -ARTIFICIAL GRASS - STATOVCHA, BULGARIA - 800m² - Artificial grass, POLITURF ROYAL 5588
 -VARIOUS PLAYGROUND PROJECTS IN SPAIN - 800m², SAFEPOL MULTICOLOR, Playground flooring

-SCHOOL IN AL WAKRA CITY - DOHA, QATAR - 800m² - Polyurethane sports flooring
 -SEMICOVERED COURT – LA SERENA, CHILE - 800m² - SPORTFLOOR-EX, Acrylic flooring
 -RUNNING TRACK IN KRSKO - SLOVENIA - 800m² - POLTRACK SPRAYCOAT, Running track
 -LYCEE FRANCAISE PROJECT - BEIRUT, LEBANON - 800m² - Acrylic sports flooring
 -SULTAN MANOR - RIYADH, KSA - 800m² - Polyurethane multipurpose sports flooring
 -MINISTRY OF EDUCATION - AL KHARIZ, KSA - 800m² - PU indoor multipurpose sports flooring
 -GEMS AMERICAN ACADEMY - ABU DHABI - U.A.E - 800m² - POLTRACK SANDWICH, Running track
 -INDOOR SPORTS COURT IN INDONESIA - 800m², POLYFLEX PU-IN, Polyurethane flooring

-WARSAN STABLE – U.A.E - 800m² - POLTRACK EQUESTRIAN SYSTEM
 -INDOOR SPORTS COURT - MALAYSIA - 800m² - PU indoor sports flooring
 -KID'S PLAY AREA IN MALL - MOROCCO - 800m², POLYFLEX PU-IN, Polyurethane flooring
 -MARASSI R1 PROJECT - EGYPT - 800m² - Playground flooring, SAFEPOL MULTICOLOR system
 -SPORTS CENTER GLIFADA, ATHENS - GREECE - 800m² - POLTRACK SANDWICH, Running track
 -INDOOR SPORTS FLOORING – INDIA - 800m², POLYFLEX PU-IN, Polyurethane flooring
 -POLO CLUB GHANTOOT – ABU DHABI, U.A.E - 800m² - POLTRACK EQUESTRIAN SYSTEM
 -SPORTS CENTER VRILISIA, ATHENS - GREECE - 800m² - POLTRACK SANDWICH, Running track

-OUTDOOR ACRYLIC COURT - BENGHAZI, LIBYA - 800m² - SPORTFLOOR-EX, Acrylic flooring
 -AL KHALEEJ SPORTS CLUB – DAMMAM, K.S.A - 800m², WET-POUR POLYFLEX PU-IN, Polyurethane flooring
 -5TH PRIMARY SCHOOL COMPLEX IN KILKIS – GREECE - 785m² - SPORTFLOOR-EX, Acrylic flooring
 -DUBAI ENGLISH SPEAKING COLLEGE - DUBAI, UAE - 785m² - SPORTFLOOR-EX, Acrylic flooring
 -MULTIPURPOSE COURT - YEREVAN - ARMENIA - 765m², COLORFLEX-EX, Rubber flooring
 -HUANCAVELICA PROJECT – PERU -750m², POLYFLEX PU-EX, Polyurethane, outdoor flooring
 -HAYATABAD PESHAWAR - PAKISTAN - 750m², POLYFLEX PU-IN, Polyurethane flooring
 -MARINA MALL – DUBAI, U.A.E - 750m², POLYFLEX PU-IN, Polyurethane flooring

-TOWNSHIP BHATINDA – INDIA - 750m², WET-POUR POLYFLEX PU-EX, Polyurethane, outdoor flooring
 -AL-SALT SPORTS COMPLEX – JORDAN - 750m², FLEXFLOOR-EX, Acrylic flooring

INDICATIVE REFERENCE LIST OF PROJECTS

-SINGAPORE AIRLINES - SINGAPORE - 735m², POLYFLEX PU-IN, Polyurethane flooring
-CJM MIZIARA SCHOOL - LEBANON - 730m², WET-POUR POLYFLEX AEL-EX, Acrylic flooring
-AL DAJAN COMPANY - GASIM, KSA - 722m² - Polyurethane sports flooring/Tennis court
-SELECTIVE GOVERNMENT HIGH SCHOOL - EGYPT - 720m², Outdoor sports flooring
-INDIAN AIR FORCE - AHMEDABAD, INDIA - 720m²- Acrylic sports courts
-FITNESS TIME - FAYSALIA, DAMMAM, KSA - 700 m²-PU indoor multipurpose sports flooring/running track
-FITNESS TIME YASMEEN - RIYADH, KSA - 700 m² - PU indoor multipurpose sports flooring/running track
-FERRARI WORLD - ABU DHABI, UAE - 700m² - Playground flooring

-KOHAT SPORTS COMPLEX - PAKISTAN - 700m², POLYFLEX PU-IN, Polyurethane flooring
-FITNESS TIME JUNIOR - RIYADH, KSA - 700 m² - PU indoor multipurpose sports flooring/running track
-CHUGUEV CITY – UKRAINE - 700 m² - COLORFLEX/SAFEPOLE/POLTRACK SPRAYCOAT
-FITNESS TIME, PLUS RIYADH - RIYADH, KSA - 700 m² - PU indoor sports flooring and running track
-FITNESS TIME, SALAMA BRANCH BRO & FITNESS - JEDDAH, KSA - 700 m² - PU indoor sports flooring
-INDOOR SPORTS FLOORING PROJECT IN CROATIA - 700m², COLORFLEX-EX, Rubber flooring
-FITNESS TIME, 40th BRANCH - JEDDAH, KSA - 700 m² - PU indoor sports flooring and running track
-NASR CLUB- EGYPT - 700m², WET-POUR POLYFLEX, Polyurethane flooring

-HUREL DOUBLE 3 - RAS AL KHAIMH, KSA - 700 m² - Shockpad plus acrylic coatings
-THE SUSTAINABLE CITY - DUBAI, U.A.E - 700 m² - Acrylic flooring
-PROJECT IN MALTA - 700 m² - SPORTFLOOR-EX, Acrylic flooring
-EMAAR - EMIRATES HILLS 2 - DUBAI, U.A.E - 700m² - Basketball court, Acrylic flooring
-AIRFORCE SURBOTO PARK - NEW DELHI, INDIA - 680 m² - Polyurethane outdoor sports flooring
-INDIAN ARMY - DHRANGDHARA, INDIA - 670m² - Acrylic sports courts
-MT. SAINT PATRICK ACADEMY - INDIA - 665m² - Acrylic sports courts
-RAJIV GANDHI THERMAL POWER PLANT - HISAR, INDIA - 650m², FLEXFLOOR-EX, Acrylic flooring

-ALREYADEYA CITY - BEGHAZI, LIBYA - 650 m², POLYFLEX PU-IN, Polyurethane flooring
-JAWAHARLAL NEHRU TECHNOLOGICAL UNIVERSITY ANANTAPURAMU - ANANTAPUR, INDIA - 650m², FLEXFLOOR
-TILAL HOTEL - DUBAI, U.A.E - 650 m² - SAFEPOLE MULTICOLOR system
-REGIONAL HQ AT BURAIMI - OMAN - 650 m², COLORFLEX-EX, Rubber flooring & PU sport flooring
-PLAYGROUND FLOORING PROJECT IN LARNAKA, CYPRUS - 650 m² - SAFEPOLE MULTICOLOR system
-ROYAL OMAN POLICE TASK FORCE RUSTAQ - OMAN - 650 m², COLORFLEX-EX, Rubber flooring & PU sport flooring
-ROYAL OMAN POLICE TASK FORCE LIWA - OMAN - 650 m², COLORFLEX-EX, Rubber flooring & PU sport flooring
-EQUINE FLOORING - BAHRAIN - 650m², POLTRACK EQUESTRIAN SYSTEM

-ROYAL OMAN POLICE TASK FORCE AL SALIL - OMAN - 650 m², COLORFLEX-EX, Rubber flooring & PU sport flooring
-VILLA BOLOGAN TENNIS COURT - MALTA - 650m² - Acrylic sports courts, SMARTFLOOR-EX
-OUTDOOR TENNIS COURTS IN RAHOVEC - KOSOVO - 650m² - SPORTFLOOR-EX, Acrylic flooring
-ROYAL OMAN POLICE TASK FORCE IBRI - OMAN - 650m², COLORFLEX-EX, Rubber flooring & PU sport flooring
-ROYAL OMAN POLICE TASK FORCE IBRA - OMAN - 650m², COLORFLEX-EX, Rubber flooring & PU sport flooring
-3 PICKLEBALL COURTS IN CRAZ CITY - AUSTRIA - 650m², FLEXFLOOR-EX, Acrylic flooring
-OASIS COMPLEX - K.S.A - 650m², POLYFLEX PU-IN, Polyurethane flooring
-ABU DHABI MUNICIPALITY - ABU DHABI, UAE - 650m² - Acrylic flooring

-INDOOR BASKETBALL COURT - JUBAIL - K.S.A - 650m², WET-POUR POLYFLEX PU-IN, Polyurethane flooring
-ST. MARY'S SCHOOL - LEMESOS, CYPRUS - 650m² - Playground flooring, SAFEPOLE MULTICOLOR



50 YEARS OF EXPERIENCE

KDF

Sports Flooring Systems & Building Materials
50 YEARS OF EXPERIENCE

19th km National Road Thessaloniki-Moudania
Neo Rysio, Thessaloniki, Greece
t: +30 2310 829598
e: exports@kdf.gr
w: www.kdf.gr