

# JOGGING TRACKS

## POLTRACK JOGGING TRACK


Elastic, seamless, flexible coloured flooring, ideal for jogging tracks.

It consists of a shock-pad base of 2 layers, first layer is a base layer of **SBR** granules (granulometry 2-5mm or 3-5mm) and second layer a base of flexible, colored **EPDM** granules(0.5-1.5mm). Then follows a PU flexible pore filler coating, **POLYSPORT STUCCO 1050**, in 2 layers and a sealing PU, UV-resistant aliphatic top layer, **POLYSPORT 1052**, in two crossing layers.

**Certified system by LABOSPORT Institute.**

### Steps:

1. **PU PRIMER 870 - Polyurethane primer.**  
Applied by airless sprayer or brush.
2. **Mixture of PU BINDER 1118 and RECYCLED RUBBER 858** (in granulometry of 2-5mm or 3-5mm) applied by paving machine.
3. **Mixture of PU BINDER 1118 and EPDM 856** (in granulometry of 0.5-1.5mm) applied by paving machine.
4. **POLYSPORT STUCCO 1050 - Polyurethane, elastic, two-component pore filler.**  
Used for sealing porous prefabricated subfloor of sports floorings such as **ISOPOL 854** or wet-pour cushion shock-pads. Applied by flat trowel.
5. **POLYSPORT 1052 - UV-resistant, polyurethane, two-component, top coating for outdoor sports floorings.**  
Applied, in two crossing layers by airless sprayer or a short haired mohair roller.

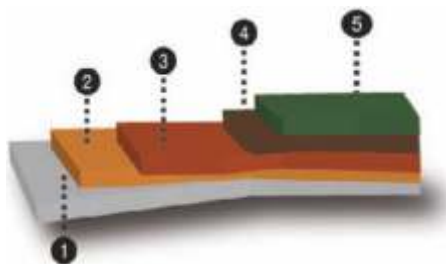

Description	Consumption
PU PRIMER 870 - Polyurethane primer.	0.2kg/m <sup>2</sup> for 2 layers
<b>BASE LAYER</b>	
PU BINDER 1118 - Polyurethane binder.	1.3kg/m <sup>2</sup> for 13mm mixture
RECYCLED RUBBER 858 in granulometry of 2-5mm or 3-5mm.	7.8kg/m <sup>2</sup> for 13mm mixture
<b>TOP LAYER</b>	
PU BINDER 1118 - Polyurethane binder.	1kg/m <sup>2</sup> for 5mm mixture
EPDM 856 in granulometry of 0.5-1.5mm.	5kg/m <sup>2</sup> for 5mm mixture
<b>SEALING LAYER</b>	
POLYSPORT STUCCO 1050 - Polyurethane, elastic, two-component pore filler.	1.5kg/m <sup>2</sup> for 2 layers
<b>TOP COATING</b>	
POLYSPORT 1052 - UV-resistant, polyurethane, two-component, top coating for outdoor sports floorings.	0.25kg/m <sup>2</sup> for 2 layers